

V-TAC[®]

INNOVATIVE LED LIGHTING



2017-Q1 Catalogue

Showroom Support

Vienna | Bucharest | Budapest
Paris | Frankfurt | Birmingham

Head Offices

Sofia | London

MORE THAN

1000

PRODUCTS

Our Mission

Provide the Ultimate LED Solutions

Founded in 2009, V-TAC has grown from strength to strength and has established itself as a global brand providing energy efficient lighting solutions covering more than 70 countries throughout Europe, Asia Pacific, Africa, Middle East and the USA.

As a result of its relentless pursuit towards excellence, V-TAC has been listed in London Stock Exchange Group's 1000 Companies to Inspire Europe 2016.


V-TAC believes in offering high quality LED solutions with strong product guarantees, competitively priced and easy to install products certified with DEKRA, GS, TUV, CE/EMC, ROHS and UL certifications. With over a 1000 value for money products in all categories, continued investment in people, systems and product innovations, V-TAC continues to explore uncharted territories.

Over the last eight years V-TAC has replaced 35 million standard lights with energy saving LED Lights, resulting in total customer savings of over a £150 million per year, which has led to the reduction of over 150 thousand tons of Carbon Emissions.

With a vision to provide affordable LED Lighting solutions to Residential, Industrial and Commercial sectors, V-TAC surges forward on the foundation of its three pronged approach – Design, Develop and Distribute at lighting speed EVERYDAY!

OUR APPROVALS



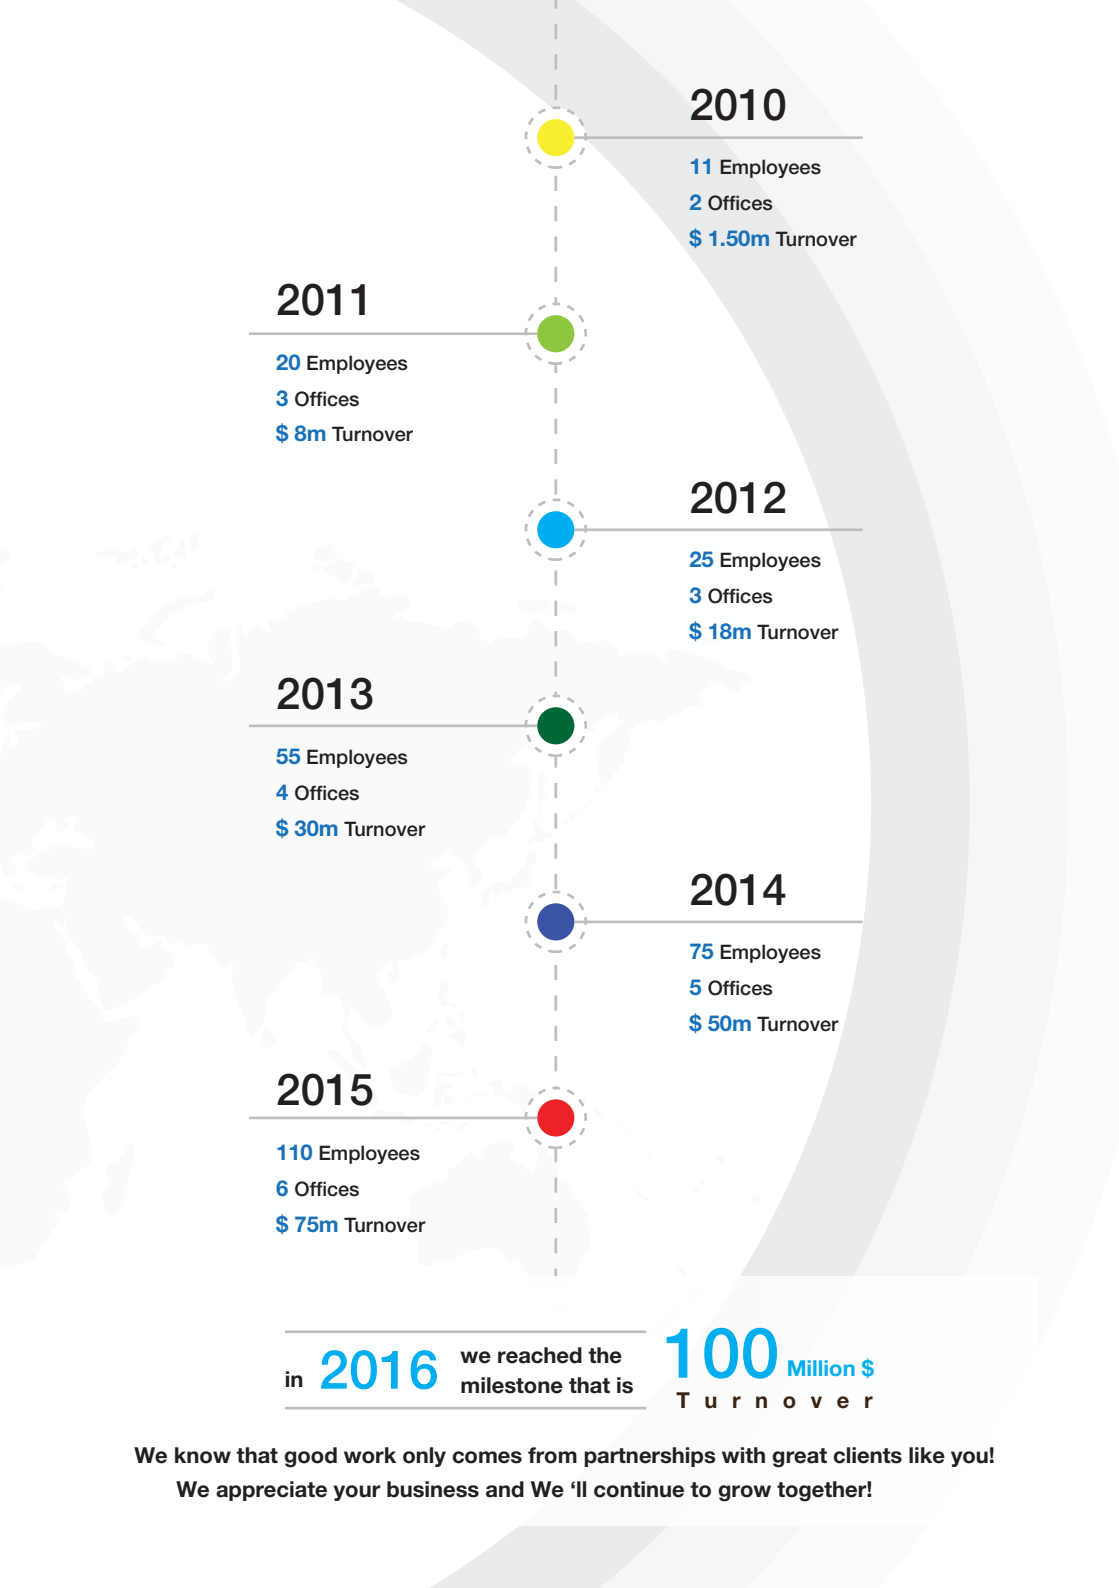

2010

11 Employees
2 Offices
\$ 1.50m Turnover

2011

20 Employees
3 Offices
\$ 8m Turnover

2012

25 Employees
3 Offices
\$ 18m Turnover

2013

55 Employees
4 Offices
\$ 30m Turnover

2014

75 Employees
5 Offices
\$ 50m Turnover

2015

110 Employees
6 Offices
\$ 75m Turnover

in **2016** we reached the
milestone that is

100 Million \$
T u r n o v e r

We know that good work only comes from partnerships with great clients like you!
We appreciate your business and We 'll continue to grow together!

Certificates



DIALux Partner



TUV



RoHS



The LIA Member



CE / LVD

LED Flood lights 02



Shiny White

08 : 12



Shiny Grey/Black

12 : 24



Sand Finish Black

25 : 28



Sand Finish Grey

29 : 09



Slim Series

08 : 09



I - Series

08 : 12



Italian Series

12 : 24



PIR Sensor Series

25 : 28



RGB Series

29 : 09



Big Power Series

08 : 09



Accessories

08 : 12

LED Bulbs 50



Vintage Series

08 : 12



Amber Cover

12 : 24



White Cover

25 : 28



Frost Cover

29 : 09



Clear Glass

08 : 09



Thermal Plastic

08 : 12



Blister Packing

12 : 24

LED Spotlights **80**



GU10-MR16

08 : 12



G9

12 : 24



Accessories

25 : 28

LED PAR Bulbs **100**



AR111

08 : 12



Accessories

12 : 24



PAR 38

25 : 28



Accessories

29 : 09

LED Tubes **120**




Nano-Plastic

08 : 12



Glass Tubes

12 : 24



Commercial Tubes

25 : 28



Fixtures With LED

29 : 09



Batten Fittings

08 : 09

LED Water-proof Fitting **150**



Water-proof Fitting

08 : 12

LED Panels 180



60 x60 Panels

08 : 12



Big Panels

12 : 24



Accessories

25 : 28



Mini Panels

29 : 09



Batten Fittings

08 : 09

LED HighBays 200



UFO Highbays

08 : 12



High Power

12 : 24



Streetlights

08 : 12

LED Strip Lights 300



Strip Lights

08 : 12



Aluminum Profiles

12 : 24



Strip Controllers

25 : 28



Power Supplies

29 : 09

LED Track Lights 120



COB Track Lights

08 : 12



Accessories

12 : 24



COB Downlights

25 : 28



Step Lights

29 : 09



Zoom Lights

29 : 09

LED Downlights 120

LED Dome Lights 180



Dome Lights

08 : 12

LED Motion Sensor 250



Infrared

08 : 12



Microwave

12 : 24



Photocell

25 : 28

LED Table Lamps 300



Smart Speakers

08 : 12



Desk Lamp

12 : 24



Solar Lights

08 : 12



Pool Lights

12 : 24



Outdoor Fixtures

25 : 28

Garden Lamps 400



Wall Lamps

08 : 12



Ceiling Lamp

12 : 24



Stand Lamp

25 : 28



Power Supplies

29 : 09



Power Supplies

29 : 09

Wall Lights 450


Display Screen 500

LED / Decorative Pendants 510



Designer Sleek

08 : 12



Chandeliers

12 : 24



Pendants

25 : 28



Holders

29 : 09



LED Flood Lights

V-TAC's LED Floodlights are ideal for lighting Driveways, Gardens and Buildings. These energy efficient lights emit Bright, Vibrant Light and are an eco friendly replacement for traditional Halogen Floodlights and Metal Halide fixtures.

Product Features




- Available in White , Warm White and RGB
- Light output option
- Available from 10W up to 600W
- Premium Quality Aluminium Alloy body
- Corrosion Resistant
- Fascia glass sealed with SILICONE RUBBER ensuring superior waterproof /airtight performance
- High Power LED chip
- Built in constant current driver
- Built in Power supply, No external ballast required

Applications

Widely used for Lighting Driveways, Gardens & Buildings, Commercial Bill Boards & Hoardings, Plazas, Sports Grounds & Parking Lots



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

10W VT-4911

5771 3000k Warm White
5772 4500k Day White
5773 6000k White




EAN Code

3800157614450
3800157614467
3800157614474



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	113x136x28mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

20W VT-4922

5789 3000k Warm White
5790 4500k Day White
5791 6000k White




EAN Code

3800157614634
3800157614641
3800157614658



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	148x181x34mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

30W VT-4933

5807 3000k Warm White
5808 4500k Day White
5809 6000k White




EAN Code

3800157614818
3800157614825
3800157614832



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	2550lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	174 x 217 x 35mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

50W VT-4955

5825 3000k Warm White
5826 4500k Day White
5827 6000k White



EAN Code

3800157614993
3800157615006
3800157615013



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	4250lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	194 x 237 x 38mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



100W VT-49100

EAN Code



- 5843 3000k Warm White
- 5844 4500k Day White
- 5845 6000k White

- 3800157615174
- 3800157615181
- 3800157615198



EQ. Watts:	600W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	8500lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	231x 293 x41mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



150W VT-49150

EAN Code

- 5855 3000k Warm White
- 5856 4500k Day White
- 5857 6000k White

- 3800157615297
- 3800157615303
- 3800157615310



EQ. Watts:	800W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	12750lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	313 x 411x 51mm



200W VT-49200

EAN Code



5909 4500k Day White
5910 6000k White

3800157619431
3800157619448


A+

EQ. Watts:	1000W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240V/50Hz	Color of Fixture:	White
Luminous Flux:	17000lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	340 x 454x 56mm




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

10W VT-4911

5774 3000k Warm White
5775 4500k Day White
5776 6000k White




EAN Code

3800157614481
3800157614498
3800157614504



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	113x136x28mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

20W VT-4922

5792 3000k Warm White
5793 4500k Day White
5794 6000k White




EAN Code

3800157614665
3800157614672
3800157614689



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	148x181x34mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

30W VT-4933

5810 3000k Warm White
5811 4500k Day White
5812 6000k White




EAN Code

3800157614849
3800157614856
3800157614863



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	2550lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	174 x 217 x 35mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

50W VT-4955

5828 3000k Warm White
5829 4500k Day White
5830 6000k White



EAN Code

3800157615020
3800157615037
3800157615044



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	4250lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	194 x 237 x 38mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



100W VT-49100


5846 3000k Warm White
5847 4500k Day White
5848 6000k White

EAN Code


3800157615204
3800157615211
3800157615228



EQ. Watts:	600W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	8500lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	231x 293 x41mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



150W VT-49150


5858 3000k Warm White
5859 4500k Day White
5860 6000k White

EAN Code

3800157615327
3800157615334
3800157615341






EQ. Watts:	800W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey / Black
Luminous Flux:	12750lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	313 x 411x 51mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

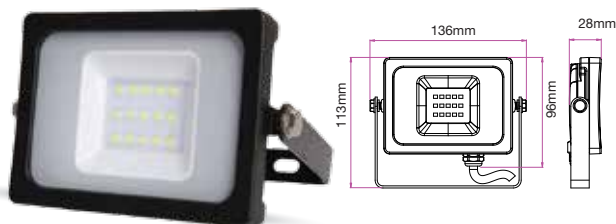

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

10W VT-4911

EAN Code

5777 3000k Warm White

3800157614511

5778 4500k Day White

3800157614528




5779 6000k White

3800157614535



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	113x136x28mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

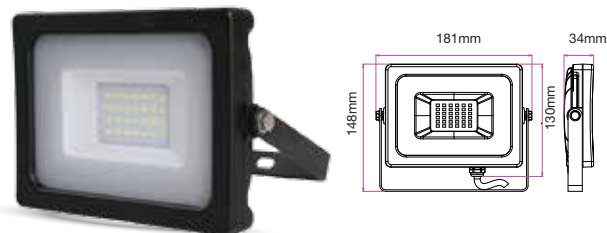

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

20W VT-4922

EAN Code

5795 3000k Warm White

3800157614696

5796 4500k Day White

3800157614702




5797 6000k White

3800157614719





EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	148x181x34mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




100W VT-49100

5849 3000k Warm White
5850 4500k Day White
5851 6000k White

EAN Code



3800157615235
3800157615242
3800157615259



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

EQ. Watts:	600W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	8500lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	231x 293 x41mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




150W VT-49150

5861 3000k Warm White
5862 4500k Day White
5863 6000k White

EAN Code

3800157615358
3800157615365
3800157615372



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

EQ. Watts:	800W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	12750lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	313 x 411x 51mm



200W VT-49200

5911 4500k Day White
5912 6000k White




EAN Code

3800157619455
3800157619462




EQ. Watts:	1000W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	17000lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	340 x 454x 56mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

10W VT-4911

5780 3000k Warm White
5781 4500k Day White
5782 6000k White


EAN Code

3800157614542
3800157614559
3800157614566



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	113x136x28mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

20W VT-4922

5798 3000k Warm White
5799 4500k Day White
5800 6000k White



EAN Code

3800157614726
3800157614733
3800157614740



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	148x181x34mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



30W VT-4933

5816 3000k Warm White
5817 4500k Day White
5818 6000k White



EAN Code

3800157614900
3800157614917
3800157614924



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	2550lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	174 x 217 x 35mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



50W VT-4955

5834 3000k Warm White
5835 4500k Day White
5836 6000k White



EAN Code

3800157615082
3800157615099
3800157615105



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	4250lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	194 x 237 x 38mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



100W VT-49100

EAN Code



5852 3000k Warm White
5853 4500k Day White
5854 6000k White

3800157615266
3800157615273
3800157615280



EQ. Watts:	600W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	8500lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	231x 293 x41mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



150W VT-49150

EAN Code

5864 3000k Warm White
5865 4500k Day White
5866 6000k White

3800157615389
3800157615396
3800157615402



EQ. Watts:	800W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	12750lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	313 x 411x 51mm



200W VT-49200

5913 4500k Day White
5914 6000k White

EAN Code



3800157619479

3800157619486




EQ. Watts:	1000W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	17000lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	340 x 454x 56mm


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM






Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

200W VT-48202

EAN Code




5873 / 5729 4500K Daywhite
5874 / 5730 6000K White

3800157606127
3800157606134



EQ. Watts:	1000W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	16000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	434 x 352 x 60 mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

300W VT-48302

EAN Code



5731 4500K Daywhite
5732 6000K White

3800157606141
3800157606158



EQ. Watts:	1500W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	24000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	532 x 443 x 70 mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



20W VT-4820
5760 / 5718 Green



EAN Code
3800157604970



Green LED

EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.95	Dimension:	182 x 142 x 36mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



20W VT-4820
5719 Blue

EAN Code
3800157604987



Blue LED



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.95	Dimension:	182 x 142 x 36mm

**10W VT-4611**

5898 3000k Warm White
5899 4500k Day White
5900 6000k White

EAN Code

3800157619219
3800157619226
3800157619233





EQ. Watts:	20W	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	White
Luminous Flux:	850lm	Body Type:	Die Cast aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	122 x 105 x 30mm

**10W VT-4611**

5875 3000k Warm White
5876 4500k Day White
5877 6000k White

EAN Code

3800157615976
3800157615983
3800157615990





EQ. Watts:	20W	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	Black
Luminous Flux:	850lm	Body Type:	Die Cast aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	122 x 105 x 30mm

**20W VT-4621**

5878 3000k Warm White
5879 4500k Day White
5880 6000k White

EAN Code

3800157616003
3800157616010
3800157616027



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	Black
Luminous Flux:	1700lm	Body Type:	Die Cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	168 x 135 x 30 mm





30W VT-4631

5881 3000k Warm White
5882 4500k Day White
5883 6000k White

EAN Code

3800157616034
3800157616041
3800157616058



EQ. Watts:	60w	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	Black
Luminous Flux:	2550	Body Type:	Die Cast aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	213 x 168 x 32





50W VT-4651

5884 3000k Warm White
5885 4500k Day White
5886 6000k White

EAN Code

3800157616065
3800157616072
3800157616089



EQ. Watts:	100w	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	Black
Luminous Flux:	4250	Body Type:	Die Cast aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	255 x 196 x 36mm





50W VT-4651

5904 3000k Warm White
5905 4500k Day White
5906 6000k White

EAN Code

3800157619370
3800157619387
3800157619394



EQ. Watts:	100w	Beam Angle:	110°
Voltage/Frequency:	AC:200-240,50/60Hz	Color of Fixture:	White
Luminous Flux:	4250	Body Type:	Die Cast aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	255 x 196 x 36




10W VT-4714

5655 3000K Warmwhite
5656 4500K Daywhite
5657 6000K White


A+

EAN Code

3800157603027
3800157603034
3800157603041



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	18W	Beam Angle:	85°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	800lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	137 x 87 x 60mm




20W VT-4724

5658 3000K Warmwhite
5659 4500K Daywhite
5660 6000K White


A+

EAN Code

3800157603058
3800157603065
3800157603072



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	36W	Beam Angle:	90°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	218 x 142 x 60mm




30W VT-4734

5661 3000K Warmwhite
5662 4500K Daywhite
5663 6000K White


A+

EAN Code

3800157603089
3800157603096
3800157603102



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	54W	Beam Angle:	90°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	2400lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	274 x 188 x 73mm




50W VT-4754

5664 3000K Warmwhite
5665 4500K Daywhite
5666 6000K White




EAN Code

3800157603119
3800157603126
3800157603133



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	90W	Beam Angle:	100°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	4000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	335 x 239 x 120mm




100W VT-47104

5667 3000K Warmwhite
5668 4500K Daywhite
5669 6000K White




EAN Code

3800157603140
3800157603157
3800157603164



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	180W	Beam Angle:	100°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	8000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	405 x 288 x 130mm




150W VT-47154

5670 3000K Warmwhite
5671 4500K Daywhite
5672 6000K White




EAN Code

3800157603171
3800157603188
3800157603195



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE (50%): 97.4 DEG

EQ. Watts:	270W	Beam Angle:	100°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	12000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	480 x 330 x 160mm




200W VT-47204

5673 3000K Warmwhite
5674 4500K Daywhite
5675 6000K White




EAN Code

3800157603201
3800157603218
3800157603225





LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




AVERAGE BEAM ANGLE (50%): 106.8 DEG

EQ. Watts:	360W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Grey
Luminous Flux:	16000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	535 x 355 x 170mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



10W VT-4911

5786 3000k Warm White
5787 4500k Day White
5788 6000k White

EAN Code

3800157614603

3800157614610

3800157614627



Detection Angle: **120°**

Detection Distance: **2-8 Meters**




EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	113x 178x 47mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



20W VT-4922

5804 3000k Warm White
5805 4500k Day White
5806 6000k White

EAN Code

3800157614788

3800157614795

3800157614801



Detection Angle: **120°**

Detection Distance: **2-8 Meters**



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	181 x 205 x 57mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



30W VT-4933


5822 3000k Warm White
5823 4500k Day White
5824 6000k White

EAN Code
3800157614962
3800157614979
3800157614986

Detection Angle: 120°
Detection Distance: 2-8 Meters





EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	2550lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	217 x 231 x59mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



50W VT-4955


5840 3000k Warm White
5841 4500k Day White
5842 6000k White

EAN Code
3800157615143
3800157615150
3800157615167

Detection Angle: 120°
Detection Distance: 2-8 Meters





EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	White
Luminous Flux:	4250lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237 x251x 62mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



10W VT-4911

5783 3000k Warm White
5784 4500k Day White
5785 6000k White


EAN Code

3800157614573
3800157614580
3800157614597

Detection Angle: **120°**
Detection Distance: **2-8 Meters**





EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	800lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	113x 178x 47mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



20W VT-4922

5801 3000k Warm White
5802 4500k Day White
5803 6000k White


EAN Code

3800157614757
3800157614764
3800157614771

Detection Angle: **120°**
Detection Distance: **2-8 Meters**






EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	1600lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	181 x 205 x 57mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

30W VT-4933

5819 3000k Warm White
5820 4500k Day White
5821 6000k White

EAN Code




3800157614931
3800157614948
3800157614955

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	2550lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	217 x 231 x 59mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

50W VT-4955

5837 3000k Warm White
5838 4500k Day White
5839 6000k White

EAN Code


3800157615112
3800157615129
3800157615136

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	4250lm	Body Type:	Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237 x 251 x 62mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure


Max. Dist: 100m

1.0m	15.000 / 450.000 lx	0.400m / 9.400 lx
2.0m	3.750 / 100.000 lx	0.800m / 23.500 lx
3.0m	1.667 / 44.444 lx	1.200m / 15.667 lx
4.0m	0.938 / 25.000 lx	1.600m / 11.063 lx
5.0m	0.704 / 18.889 lx	2.000m / 8.750 lx
6.0m	0.556 / 14.815 lx	2.400m / 7.083 lx
7.0m	0.476 / 12.643 lx	2.800m / 6.122 lx
8.0m	0.417 / 11.111 lx	3.200m / 5.375 lx
9.0m	0.370 / 9.877 lx	3.600m / 4.778 lx
10.0m	0.333 / 8.889 lx	4.000m / 4.286 lx

Max. Dist: 100m

1.0m	15.000 / 450.000 lx	0.400m / 9.400 lx
2.0m	3.750 / 100.000 lx	0.800m / 23.500 lx
3.0m	1.667 / 44.444 lx	1.200m / 15.667 lx
4.0m	0.938 / 25.000 lx	1.600m / 11.063 lx
5.0m	0.704 / 18.889 lx	2.000m / 8.750 lx
6.0m	0.556 / 14.815 lx	2.400m / 7.083 lx
7.0m	0.476 / 12.643 lx	2.800m / 6.122 lx
8.0m	0.417 / 11.111 lx	3.200m / 5.375 lx
9.0m	0.370 / 9.877 lx	3.600m / 4.778 lx
10.0m	0.333 / 8.889 lx	4.000m / 4.286 lx

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



10W VT-4810-1 PIR

5746 3000K Warmwhite
5747 4500K Daywhite
5748 6000K White


EAN Code
3800157608206
3800157608213
3800157608220

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	800lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	133x178x47mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure


Max. Dist: 100m

1.0m	15.000 / 450.000 lx	0.400m / 9.400 lx
2.0m	3.750 / 100.000 lx	0.800m / 23.500 lx
3.0m	1.667 / 44.444 lx	1.200m / 15.667 lx
4.0m	0.938 / 25.000 lx	1.600m / 11.063 lx
5.0m	0.704 / 18.889 lx	2.000m / 8.750 lx
6.0m	0.556 / 14.815 lx	2.400m / 7.083 lx
7.0m	0.476 / 12.643 lx	2.800m / 6.122 lx
8.0m	0.417 / 11.111 lx	3.200m / 5.375 lx
9.0m	0.370 / 9.877 lx	3.600m / 4.778 lx
10.0m	0.333 / 8.889 lx	4.000m / 4.286 lx

Max. Dist: 100m

1.0m	15.000 / 450.000 lx	0.400m / 9.400 lx
2.0m	3.750 / 100.000 lx	0.800m / 23.500 lx
3.0m	1.667 / 44.444 lx	1.200m / 15.667 lx
4.0m	0.938 / 25.000 lx	1.600m / 11.063 lx
5.0m	0.704 / 18.889 lx	2.000m / 8.750 lx
6.0m	0.556 / 14.815 lx	2.400m / 7.083 lx
7.0m	0.476 / 12.643 lx	2.800m / 6.122 lx
8.0m	0.417 / 11.111 lx	3.200m / 5.375 lx
9.0m	0.370 / 9.877 lx	3.600m / 4.778 lx
10.0m	0.333 / 8.889 lx	4.000m / 4.286 lx

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



20W VT-4820-1 PIR

5756 3000K Warmwhite
5749 4500K Daywhite
5750 6000K White


EAN Code
3800157611688
3800157608862
3800157608879

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	185x211x50mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

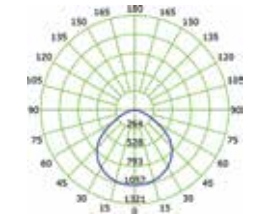


The average illuminance effective figure

0000-0001-9321-9999

[illegible]

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



30W VT-4830-1 PIR

5757 3000K Warmwhite
5751 4500K Daywhite
5752 6000K White

EAN Code

3800157611695

3800157608886

3800157608893


Detection Angle: **120°**

Detection Distance: **2-8 Meters**



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	2400lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237x255x51mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

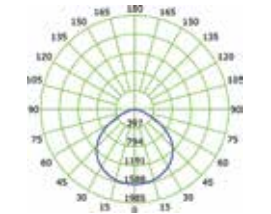


The average luminance effective figure

Phone: 949.440.8800

[illegible]

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



50W VT-4850-1 PIR

5758 3000K Warmwhite
5753 4500K Daywhite
5754 6000K White

EAN Code

3800157611701

3800157608909

3800157608916


Detection Angle: **120°**

Detection Distance: **2-8 Meters**



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	4000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237x255x51mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The average illuminance effective figure

Max. Dist: 100.00m

0.00m	10.000 / 100.000 lx	0.00m	0.000 / 0.000 lx
0.50m	10.000 / 100.000 lx	0.50m	0.000 / 0.000 lx
1.00m	10.000 / 100.000 lx	1.00m	0.000 / 0.000 lx
1.50m	10.000 / 100.000 lx	1.50m	0.000 / 0.000 lx
2.00m	10.000 / 100.000 lx	2.00m	0.000 / 0.000 lx
2.50m	10.000 / 100.000 lx	2.50m	0.000 / 0.000 lx
3.00m	10.000 / 100.000 lx	3.00m	0.000 / 0.000 lx
3.50m	10.000 / 100.000 lx	3.50m	0.000 / 0.000 lx
4.00m	10.000 / 100.000 lx	4.00m	0.000 / 0.000 lx
4.50m	10.000 / 100.000 lx	4.50m	0.000 / 0.000 lx
5.00m	10.000 / 100.000 lx	5.00m	0.000 / 0.000 lx
5.50m	10.000 / 100.000 lx	5.50m	0.000 / 0.000 lx
6.00m	10.000 / 100.000 lx	6.00m	0.000 / 0.000 lx
6.50m	10.000 / 100.000 lx	6.50m	0.000 / 0.000 lx
7.00m	10.000 / 100.000 lx	7.00m	0.000 / 0.000 lx
7.50m	10.000 / 100.000 lx	7.50m	0.000 / 0.000 lx
8.00m	10.000 / 100.000 lx	8.00m	0.000 / 0.000 lx
8.50m	10.000 / 100.000 lx	8.50m	0.000 / 0.000 lx
9.00m	10.000 / 100.000 lx	9.00m	0.000 / 0.000 lx
9.50m	10.000 / 100.000 lx	9.50m	0.000 / 0.000 lx
10.00m	10.000 / 100.000 lx	10.00m	0.000 / 0.000 lx

Max. Dist: 100.00m

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



10W VT-4810 PIR

5723 3000K Warmwhite
5724 4500K Daywhite
5725 6000K White

EAN Code


3800157605724
3800157605731
3800157605748

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	800lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	133x178x47mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The average illuminance effective figure

Max. Dist: 100.00m

0.00m	10.000 / 100.000 lx	0.00m	0.000 / 0.000 lx
0.50m	10.000 / 100.000 lx	0.50m	0.000 / 0.000 lx
1.00m	10.000 / 100.000 lx	1.00m	0.000 / 0.000 lx
1.50m	10.000 / 100.000 lx	1.50m	0.000 / 0.000 lx
2.00m	10.000 / 100.000 lx	2.00m	0.000 / 0.000 lx
2.50m	10.000 / 100.000 lx	2.50m	0.000 / 0.000 lx
3.00m	10.000 / 100.000 lx	3.00m	0.000 / 0.000 lx
3.50m	10.000 / 100.000 lx	3.50m	0.000 / 0.000 lx
4.00m	10.000 / 100.000 lx	4.00m	0.000 / 0.000 lx
4.50m	10.000 / 100.000 lx	4.50m	0.000 / 0.000 lx
5.00m	10.000 / 100.000 lx	5.00m	0.000 / 0.000 lx
5.50m	10.000 / 100.000 lx	5.50m	0.000 / 0.000 lx
6.00m	10.000 / 100.000 lx	6.00m	0.000 / 0.000 lx
6.50m	10.000 / 100.000 lx	6.50m	0.000 / 0.000 lx
7.00m	10.000 / 100.000 lx	7.00m	0.000 / 0.000 lx
7.50m	10.000 / 100.000 lx	7.50m	0.000 / 0.000 lx
8.00m	10.000 / 100.000 lx	8.00m	0.000 / 0.000 lx
8.50m	10.000 / 100.000 lx	8.50m	0.000 / 0.000 lx
9.00m	10.000 / 100.000 lx	9.00m	0.000 / 0.000 lx
9.50m	10.000 / 100.000 lx	9.50m	0.000 / 0.000 lx
10.00m	10.000 / 100.000 lx	10.00m	0.000 / 0.000 lx

Max. Dist: 100.00m

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



20W VT-4820 PIR

5697 3000K Warmwhite
5698 4500K Daywhite
5715 6000K White

EAN Code


3800157604338
3800157604345
3800157604949

Detection Angle: 120°
Detection Distance: 2-8 Meters



EQ. Watts:	100W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	185x211x50mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The average illuminance effective figure

Page 228 of 228

[illegible]

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



30W VT-4830 PIR

5699 3000K Warmwhite
5700 4500K Daywhite
5716 6000K White

EAN Code


3800157604352
3800157604369
3800157604956

Detection Angle: **120°**
Detection Distance: **2-8 Meters**



EQ. Watts:	150W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	2400lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237x255x51mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The average illuminance effective figure

Phone: 3406.6600

[illegible]

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



50W VT-4850 PIR

5701 3000K Warmwhite
5702 4500K Daywhite
5717 6000K White

EAN Code

3800157604376
3800157604383
3800157604963

Detection Angle: **120°**
 Detection Distance: **2-8 Meters**



EQ. Watts:	250W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	4000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237x255x51mm



217mm 35mm

174mm

156mm

Infrared
Remote Control

10W VT-4710
5370

EAN Code
3800230624567



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 90-240V, 50/60Hz	Color of Fixture:	Grey
Luminous Flux:	600lm	Body Type:	Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	> 0.8	Dimension:	115 x 87 x 85mm



RF
Remote Control

10W VT-4710
5369

EAN Code
3800230624550




EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 90-240V, 50/60Hz	Color of Fixture:	Grey
Luminous Flux:	600lm	Body Type:	Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	> 0.8	Dimension:	115 x 87 x 85mm



A

RF
Remote Control
10W VT-4711
5894

EAN Code
3800157617512




EQ. Watts:	40W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey
Luminous Flux:	800lm	Body Type:	Die cast Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	>0.9	Dimension:	115x87x85mm



A

Infrared
Remote Control
10W VT-4711
5895

EAN Code
3800157617529



EQ. Watts:	40W	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey
Luminous Flux:	800lm	Body Type:	Die cast Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	>0.95	Dimension:	115x87x85mm



RF


Remote Control

30W VT-4732

5755

EAN Code

3800157609517



EQ. Watts:	150W	Beam Angle:	120°
Voltage/Frequency:	AC: 90-240V, 50/60Hz	Color of Fixture:	Grey
Luminous Flux:	2400lm	Body Type:	Die cast Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	>0.95	Dimension:	230x136x206mm



RF


Remote Control

50W VT-4752

5691

EAN Code

3800157603508



EQ. Watts:	250W	Beam Angle:	120°
Voltage/Frequency:	AC:100-240V,50/60Hz	Color of Fixture:	Grey
Luminous Flux:	4000lm	Body Type:	Die cast Aluminum
CRI:	> 80	IP Rating:	IP65
PF:	>0.95	Dimension:	230x136x206mm



Rechargeable

Portable

20W VT-4822


5692 4500K Daywhite
5735 6000K White

EAN Code

3800157603515
3800157606929



EQ. Watts:	80W	Beam Angle:	120°
Voltage/Frequency:	AC:85-265V,50/60Hz	Color of Fixture:	Green
Luminous Flux:	1600lm	Body Type:	Die cast Aluminum
CRI:	/	IP Rating:	IP54
PF:	>0.7	Dimension:	208 x 204 x 355mm



Wi-Fi Series

18W VT-4818


5745 6000K White

EAN Code

3800157608268



Power:	AC100-240V	Material:	ABS +Aluminum
Output:	18W	Image sensor:	1/4 " 1Megapixel CMOS
Detection Range:	0-12M	Video Compression:	H.264 /MJPEG dual video stream
Detect Angle:	180°	Max Image Resolution:	1280*720
Delay Time:	0-30S	Pixels:	1 million pixels
LED:	42PCS 0.2W	Size:	248x 162x 181mm
Luminous Flux:	600lm	Color of Fixture:	White



Wi-Fi Series

18W VT-4818

5917 6000K White



EAN Code

3800157620925




Power:	AC100-240V	Material:	ABS +Aluminum
Output:	18W	Image sensor:	1/4 " 1Megapixel CMOS
Detection Range:	0-12M	Video Compression:	H.264 /MJPEG dual video stream
Detect Angle:	180°	Max Image Resolution:	1280*720
Delay Time:	0-30S	Pixels:	1 million pixels
LED:	42PCS 0.2W	Size:	248x 162x 181mm
Luminous Flux:	600lm	Color of Fixture:	Black

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



300W VT-47300

EAN Code



5693 4500K Daywhite
5386 6000K White

3800157603652
3800230627438




EQ. Watts:	1200W	Beam Angle:	120°
Voltage/Frequency:	AC:90-240V,50/60Hz	Color of Fixture:	Grey
Luminous Flux:	24000lm	Body Type:	Die cast Aluminum
CRI:	> 70	IP Rating:	IP65
PF:	> 0.9	Dimension:	430 x 410 x 145mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

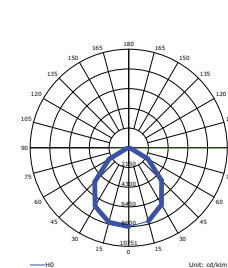

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



400W VT-47400

EAN Code



5694 4500K Daywhite
5649 6000K White

3800157603669
3800157601269




EQ. Watts:	1600W	Beam Angle:	120°
Voltage/Frequency:	AC:90-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	32000lm	Body Type:	Die cast Aluminum
CRI:	> 70	IP Rating:	IP65
PF:	> 0.9	Dimension:	555 x 540 x 179mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



500W VT-47500

EAN Code



5695 4500K Daywhite
5696 6000K White

3800157603805
3800157603812




EQ. Watts:	2000W	Beam Angle:	120°
Voltage/Frequency:	AC:100-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	40000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	555 x 540 x 179mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



600W VT-47600

EAN Code

5726 4500K Daywhite

3800157605854



EQ. Watts:	3000W	Beam Angle:	120°
Voltage/Frequency:	AC:100-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	48000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	540x555x625mm



1000W VT-491000 EAN Code



5915 4500K Daywhite
5916 6000K White

3800157619752
3800157619769





EQ. Watts:	8000W	Beam Angle:	100°
Voltage/Frequency:	AC: 100-240V	Color of Fixture:	Black
Luminous Flux:	120000lm	Body Type:	Die cast Aluminum
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	748 x 762 x 154mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



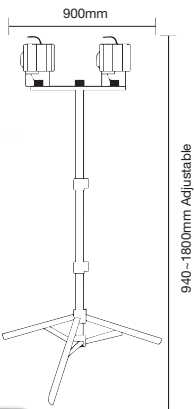

Tripod Stand for Flood Lights (Yellow)

Model No	VT-778
SKU Code	9104
EAN Code	3800230626202



Tripod Stand for Flood Lights (Black)

Model No	VT-778
SKU Code	9546
EAN Code	3800157604925

Waterproof Box Terminal Block



RESISTANT

IP65
RATED

Wire range: 0.5-2.5mm² Inside Terminal Block

Model No:	VT-7224
SKU Code:	3578
EAN Code:	3800157605335
Voltage:	250V Max
Material:	Polypropylene (PP)
Size:	123x46x33mm



Model No	VT-792
SKU Code	3621
EAN Code	3800157607735

Wire range: 4-6.5mm



RESISTANT

IP65
RATED

Wire range: 0.5-2.5mm² Inside Terminal Block

Model No:	VT-7224
SKU Code:	5897
EAN Code:	3800157619202
Voltage:	250V Max
Material:	Polypropylene (PP)
Size:	123x46x33mm




Model No	VT-792
SKU Code	5896
EAN Code	3800157619196

Wire range: 4-6.5mm

Billboard Stand For Flood Lights

Model No	VT-794
SKU Code	3623
EAN Code	3800157607810

85cm Suitable For:
10w - 20w - 30w - 50w



Model No	VT-793
SKU Code	3622
EAN Code	3800157607803

87cm Suitable For:
70w - 100w - 120w - 150w - 200w





LED Bulbs

An extensive collection of LED Bulbs which have been retrofitted to suit most standard Lighting Fixtures, with a wide range of wattage from 2W to 40W

Product Features

- Lasts 20 times longer than Standard Bulbs
- Broad Range of holders like E27, E14, B22, B15, G24 and R7S
- Uses 80% less energy than Standard Bulbs
- Glass & Thermoplastic Body options available
- Excellent Heat Radiation Efficiency
- Customized exterior for stronger body
- High Power LED Chips
- Wide beam angle up to 300°
- Non – Flickering
- Dimmable & Non Dimmable options

Applications

Widely used in residential lighting. LED Bulbs are the best replacement for conventional incandescent or fluorescent bulbs.






T-30-Clear Glass

2W VT-2042
7251 2700k Warm White

EAN Code
3800157620826




EQ. Watts:	20W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	200lm	Base:	E27
Commercial Type:	T30	Body Type:	Glass
LED Type:	Filament	Dimension:	30mm x 136mm
CRI:	>80		



T-30-Amber Cover

2W VT-2052
7252 2700k Warm White

EAN Code
3800157620833




EQ. Watts:	20W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	200lm	Base:	E27
Commercial Type:	T30	Body Type:	Glass
LED Type:	Filament	Dimension:	30mm x 136mm
CRI:	>80		



T-30-300 Amber Cover

5W VT-2005
7142 2200K Warmwhite

EAN Code
3800157610575




EQ. Watts:	45W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	500lm	Base:	E27
Commercial Type:	T30-300	Body Type:	Glass
LED Type:	Filament	Dimension:	30mm x 300mm
CRI:	>80		



T-30-185 Amber Cover

6W VT-2006
7143 2200K Warmwhite

EAN Code
3800157610582




EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	600lm	Base:	E27
Commercial Type:	T30-185	Body Type:	Glass
LED Type:	Filament	Dimension:	30mm x 185mm
CRI:	>80		



T-30-300 Amber Cover

8W VT-2008
7144 2200K Warmwhite

EAN Code
3800157610599



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	700lm	Base:	E27
Commercial Type:	T30-300	Body Type:	Glass
LED Type:	Filament	Dimension:	30mm x 300mm
CRI:	>80		




8 Filament - G80 Amber Cover

4W VT-2004


EAN Code

7148 2200K Warmwhite

3800157610636



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	G80	Body Type:	Glass
LED Type:	Filament	Dimension:	80mm x 140mm
CRI:	>80		



S-Shape Filament - G95 Amber Cover

4W VT-2024


EAN Code

7146 2200K Warmwhite

3800157610612



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 140mm
CRI:	>80		



Long Filament - G95 Amber Cover

7W VT-2027

EAN Code

7147 2200K Warmwhite

3800157610629



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	700lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 140mm
CRI:	>80		



16 Filament - G80 Amber Cover

8W VT-2019

EAN Code

3800157610605



7145 2200K Warmwhite



EQ. Watts:	65W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 140mm
CRI:	>80		



Long Filament - G125 Amber Cover

4W VT-1956

EAN Code

3800157609074



4473 2200K Warmwhite



EQ. Watts:	55W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	600lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125mm x 165mm
CRI:	>80		




Curve Filament - A60 Amber Cover

3W VT-2063


EAN Code

7219 2200K Warmwhite

3800157617277



EQ. Watts:	65W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 140mm
CRI:	>80		




Curve Filament - ST64 Amber Cover

5W VT-2066


EAN Code

7220 2200K Warmwhite

3800157617284



EQ. Watts:	55W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	600lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125mm x 165mm
CRI:	>80		




Curve Filament - ST64 Amber Cover

5W VT-2065

EAN Code

7218 2200K Warmwhite

3800157617260



EQ. Watts:	65W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125mm x 200mm
CRI:	>80		



Curve Filament - G95 Amber Cover

5W VT-2075

EAN Code

7217 2200K Warmwhite

3800157617253



EQ. Watts:	30W	PF:	>0.5
Voltage/Frequency:	AC: 220-240v, 50Hz	Beam Angle:	300°
Luminous Flux:	300lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Curve Filament	Dimension:	95 x138 mm
CRI:	>80		

Old fashioned
in **New Style**



Curve Filament - G125 Amber Cover

5W VT-2085


EAN Code

7216 2200K Warmwhite

3800157610643




EQ. Watts:	30W	PF:	>0.5
Voltage/Frequency:	AC: 220-240v, 50Hz	Beam Angle:	300°
Luminous Flux:	300lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Curve Filament	Dimension:	125 x 175mm
CRI:	>80		




Candle Filament - E14 Amber Cover

4W VT-1955
7113 2200K Warmwhite

EAN Code
3800157609883




EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37 x 100mm
CRI:	>80		




Candle Filament - E14 Amber Cover

4W VT-1948
7115 2200K Warmwhite

EAN Code
3800157609906



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37 x 100mm
CRI:	>80		



Candle Flame Filament - E14 Amber Cover

4W VT-1949
7114 2200K Warmwhite

EAN Code
3800157609890



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Glass
LED Type:	Filament	Dimension:	37 x 121mm
CRI:	>80		



Candle Filament - E14 Amber Cover

4W VT-1947

EAN Code

7116 2200K Warmwhite

3800157609913



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Glass
LED Type:	Filament	Dimension:	37 x 121mm
CRI:	>80		



P45 Filament - E14 Amber Cover

4W VT-1953

EAN Code

4499 2200K Warmwhite

3800157609746



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	P45	Body Type:	Glass
LED Type:	Filament	Dimension:	45 x 77mm
CRI:	>80		



G45 Filament - E27 Amber Cover

4W VT-1957

EAN Code

7100 2200K Warmwhite

3800157609753



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E27
Commercial Type:	G45	Body Type:	Glass
LED Type:	Filament	Dimension:	45 x 75mm
CRI:	>80		



A60 - E27 Amber Cover

4W VT-1954

EAN Code

4498 2200K Warmwhite

3800157609739



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60 x 107mm
CRI:	>80		



A67 - E27 Amber Cover

8W VT-1958

EAN Code

4472 2200K Warmwhite

3800157609067



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	720lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67 x 123mm
CRI:	>80		



A67 - E27 Amber Cover

10W VT-2028

EAN Code

7157 2200K Warmwhite

3800157612227



EQ. Watts:	65W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HZ	Beam Angle:	300°
Luminous Flux:	900lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



G95 - E27 Amber Cover

6W VT-2026

EAN Code

7156 2200K Warmwhite

3800157612210

A+



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50HZ	Beam Angle:	300°
Luminous Flux:	500lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 135mm
CRI:	>80		



Dimmable G125 - E27 Amber Cover

8W VT-2018D

EAN Code


7155 2200K Warmwhite

3800157612203

A+



EQ. Watts:	60W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V, 50HzV	PF:	>0.5
Luminous Flux:	700lm	Beam Angle:	300°
Commercial Type:	G125	Base:	E27
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	125mm x 177mm



Dimmable ST64 - E27 Amber Cover


4W VT-1964D

EAN Code


4368 2200K Warmwhite

3800157602945

A++



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V, 50Hz	PF:	>0.4
Luminous Flux:	300lm	Beam Angle:	300°
Commercial Type:	ST64	Base:	E27
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	64mm x 139mm




ST64 - E27 Amber Cover

4W VT-1964


EAN Code

4361 2200K Warmwhite

3800157602747



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E27
Commercial Type:	ST64	Body Type:	Glass
LED Type:	Filament	Dimension:	64mm x 139mm
CRI:	>80		



ST64 - E27 Amber Cover

6W VT-1966


EAN Code

4362 2200K Warmwhite

3800157602754



EQ. Watts:	45W	PF:	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	500lm	Base:	E27
Commercial Type:	ST64	Body Type:	Glass
LED Type:	Filament	Dimension:	64mm x 139mm
CRI:	>80		



ST64 - E27 Amber Cover

8W VT-1968

EAN Code

4421 2200K Warmwhite

3800157606356



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	700lm	Base:	E27
Commercial Type:	ST64	Body Type:	Glass
LED Type:	Filament	Dimension:	64mm x 139mm
CRI:	>80		



Candle - E14 White Cover


4W VT-1924

EAN Code

7101 2700k Warm White
7102 4000K Day White
7103 6400k White

3800157609760
3800157609777
3800157609784

A++



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 100mm
CRI:	>80		



Candle Flame - E14 White Cover

4W VT-1927

EAN Code

7104 2700k Warm White
7105 4000K Day White
7106 6400k White

3800157609791
3800157609807
3800157609814

A++



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 121mm
CRI:	>80		



A60 - E27 White Cover

4W VT-1939

EAN Code

4489 2700k Warm White
4490 4000K Day White
4491 6400k White

3800157609647
3800157609654
3800157609661

A++



EQ. Watts:	35W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	350lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	>80		



Candle - E14 Frost Cover

4W VT-1936

EAN Code

4474 2700k Warm White

3800157609081


4475 4000K Day White

3800157609098

4476 6400k White

3800157609104

A++



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 100mm
CRI:	>80		



Candle - E14 Frost Cover

4W VT-1928

EAN Code

7107 2700k Warm White

3800157609821


7108 4000K Day White

3800157609838

7109 6400k White

3800157609845

A++



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 100mm
CRI:	>80		



Candle Flame - E14 Frost Cover

4W VT-1937

EAN Code

4477 2700k Warm White

3800157609111

4478 4000K Day White

3800157609128

4479 6400k White

3800157609135

A++



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 121mm
CRI:	>80		



Dimmable Candle Flame - E14 Frost Cover

4W VT-2056D
7177 2700k Warm White

EAN Code
3800157615532



EQ. Watts:	35W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50HZ	PF:	>0.5
Luminous Flux:	350lm	Beam Angle:	300°
Commercial Type:	Candle Flame	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	35mm x 121mm



Dimmable Candle Flame - E14 Frost Cover

4W VT-1923
7110 2700k Warm White
7111 4000K Day White
7112 6400k White

EAN Code
3800157609852
3800157609869
3800157609876




EQ. Watts:	40W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50HzV	PF:	>0.4
Luminous Flux:	400lm	Beam Angle:	300°
Commercial Type:	Candle Flame	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	37mm x 121mm



Dimmable Candle - E14 Frost Cover

4W VT-1937
7176 2700k Warm White

EAN Code
3800157615525



EQ. Watts:	35W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50HZ	PF:	>0.5
Luminous Flux:	350lm	Beam Angle:	300°
Commercial Type:	Candle	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	35mm x 100mm

**P45 - E14 Frost Cover****4W** VT-1835

EAN Code

4492 2700k Warm White

3800157609678

4493 4000k Day White

3800157609685

4494 6400k White

3800157609692



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	P45	Body Type:	Glass
LED Type:	Filament	Dimension:	45mm x 77mm
CRI:	>80		

**G45 - E27 Frost Cover****4W** VT-1974

EAN Code

4495 2700k Warm White


3800157609708

4496 4000K Day White

3800157609715

4497 6400k White

3800157609722



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	G45	Body Type:	Glass
LED Type:	Filament	Dimension:	45mm x 75mm
CRI:	>80		

**A60 - E27 Frost Cover****4W** VT-1934

EAN Code

4486 2700k Warm White


3800157609616

4487 4000K Day White

3800157609623

4488 6400k White

3800157609630



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	>80		



A60 - E27 Frost Cover

6W VT-1835

EAN Code

4480 2700k Warm White
4481 4000K Day White
4482 6400k White

3800157609142
3800157609159
3800157609166



EQ. Watts:	55W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	660lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	>80		



A67 - E27 Frost Cover

8W VT-1938

EAN Code

4483 2700k Warm White
4484 4000K Day White
4485 6400k White

3800157609586
3800157609593
3800157609609



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



A60 - E27 Frost Cover

10W VT-2023

EAN Code

7152 2700k Warm White
7153 4000K Day White
7154 6400k White

3800157612173
3800157612180
3800157612197



EQ. Watts:	75W	PF	>0.5
Voltage/Frequency:	AC: 220-240V,50HZ	Beam Angle:	300°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



A60 - E27 Frost Cover

5W VT-2045

7178 2700k Warm White
7179 4000K Day White
7180 6400k White

EAN Code

3800157615549
3800157615556
3800157615563



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	600lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	>80		



A60 - E27 Frost Cover

7W VT-2047

7181 2700k Warm White
7182 4000K Day White
7183 6400k White

EAN Code

3800157615570
3800157615587
3800157615594



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	840lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	>80		



A60 - E27 Frost Cover

9W VT-2049

7184 2700k Warm White
7185 4000K Day White
7186 6400k White

EAN Code

3800157615600
3800157615617
3800157615624



EQ. Watts:	80W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	300°
Luminous Flux:	1100lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



G125 - E27 Frost Cover

7W VT-2067

7189 2700k Warm White
7190 6400k White

EAN Code
3800157615655
3800157615662



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	840lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125 x 177mm
CRI:	>80		



G125 - E27 Frost Cover

7W VT-2067D

7191 2700k Warm White

EAN Code
3800157615679



EQ. Watts:	55W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	750lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125 x 177mm
CRI:	>80		



G95 - E27 Frost Cover

7W VT-2057

7187 2700k Warm White
7188 6400k White

EAN Code
3800157615631
3800157615648



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	840lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95 x 135mm
CRI:	>80		



A60 - E27 Clear Glass

4W VT-1885

4259 2700K Warmwhite

EAN Code

3800230627179



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	> 80		



Dimmable A60 - E27 Clear Glass

4W VT-1885D

4364 2200K Warmwhite

EAN Code

3800157602907



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V, 50Hz	PF:	> 0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	A60	Base:	E27
LED Type:	Filament	Body Type:	Glass
CRI:	> 80	Dimension:	60mm x 107mm




A60 - B22 Clear Glass

5W VT-2035

EAN Code

7170 2700K Warmwhite

3800157615464



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	600lm	Base:	B22
Commercial Type:	A60	Body Type:	Plastic
LED Type:	Filament	Dimension:	60 x 110mm
CRI:	>80		



A60 - E27 Clear Glass

6W VT-1887

EAN Code

4272 2700K Warmwhite

4303 4500K Daywhite

3800230627667

3800157600064



EQ. Watts:	55W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	550lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 107mm
CRI:	> 80		



A60 - E27 Clear Glass

8W VT-1988

EAN Code

4363 2700K Warmwhite

3800157602891



EQ. Watts:	75W	PF:	>0.5
Voltage/Frequency:	AC:220-240V, 50/60Hz	Beam Angle:	300°
Luminous Flux:	1000lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x 105mm
CRI:	>80		



A67 - E27 Clear Glass

8W VT-1989

EAN Code

4406 2700K Warmwhite

3800157605342



EQ. Watts:	75W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	1000lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



A67 - E27 Clear Glass

8W VT-1978

EAN Code

4407 2700K Warmwhite

3800157606165

4408 4500K Daywhite

3800157606172

4409 6000K White

3800157606189



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



A67 - E27 Clear Glass

10W VT-1981

EAN Code

4410 2700K Warmwhite

3800157606196

4411 4500K Daywhite

3800157606202

4412 6000K White

3800157606219



EQ. Watts:	75W	PF	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	A67	Body Type:	Glass
LED Type:	Filament	Dimension:	67mm x 123mm
CRI:	>80		



ST26 - E14 Clear Glass

2W VT-1952

EAN Code

4444 3000K Warmwhite
4445 4500K Daywhite
4446 6000K White

3800157607858
3800157607865
3800157607872



EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	180lm	Base:	E14
Commercial Type:	ST 26	Body Type:	Glass
LED Type:	Filament	Dimension:	26 x 58 mm
CRI:	>80		




Candle - B22 Clear Glass

4W VT-2064

EAN Code

7225 2700K Warmwhite

3800157617550



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC:220-240V,50HZ	Beam Angle:	300°
Luminous Flux:	400lm	Base:	B22
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	35 x 100mm
CRI:	>80		




G45 - B22 Clear Glass

4W VT-2074

EAN Code

7226 2700K Warmwhite

3800157617567



EQ. Watts:	40W	PF	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	B22
Commercial Type:	G45	Body Type:	Glass
LED Type:	Filament	Dimension:	45 x 75mm
CRI:	> 80		



Candle - E14 Clear Glass


4W VT-1986

EAN Code

4301 2700K Warmwhite
4413 4500K Daywhite
4414 6000K White

3800230629951
3800157606226
3800157606233

A++



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 100mm
CRI:	> 80		



Candle - E14 Clear Glass


4W VT-1985

EAN Code

4307 2700K Warmwhite

3800157600347

A++



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 100mm
CRI:	> 80		



Candle Flame - E14 Clear Glass

4W VT-1997

EAN Code

4302 2700K Warmwhite
4429 4500K Daywhite
4430 6000K White

3800230629968
3800157606431
3800157606448

A++



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 121mm
CRI:	> 80		



Candle Flame - E14 Clear Glass

4W VT-1985

EAN Code

4308 2700K Warmwhite
4431 4500K Daywhite
4432 6000K White

3800157600354
3800157606455
3800157606462



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Glass
LED Type:	Filament	Dimension:	37mm x 121mm
CRI:	> 80		




Dimmable Candle - E14 Clear Glass

4W VT-1986D

EAN Code

4365 2700K Warmwhite

3800157602914



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V, 50Hz	PF:	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	Candle	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	37mm x 100mm



Dimmable Candle Flame - E14 Clear Glass

4W VT-1997D

EAN Code

4366 2700K Warmwhite

3800157602921



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V, 50Hz	PF	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	Candle Flame	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	37mm x 121mm




Dimmable Candle - E14 Clear Glass

4W VT-1985D

4367 2700K Warmwhite

EAN Code

3800157602938



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V, 50Hz	PF:	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	Candle	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	37mm x 100mm



Dimmable Candle Flame - E14 Clear Glass

4W VT-1995D

4388 2700K Warmwhite

EAN Code

3800157603973



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V, 50Hz	PF:	> 0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	Candle Flame	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	> 80	Dimension:	37mm x 121mm



G45 - E27 Clear Glass

4W VT-1980

4306 2700K Warmwhite

4427 4500K Daywhite


4428 6000K White

EAN Code

3800157600330

3800157606417

3800157606424



EQ. Watts:	40W	PF	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E27
Commercial Type:	G45	Body Type:	Glass
LED Type:	Filament	Dimension:	45mm x 75mm
CRI:	> 80		



Dimmable G45 - E27 Clear Glass

4W VT-1980D
4395 2700K Warmwhite

EAN Code
3800157604796



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V,50Hz	PF:	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	G45	Base:	E27
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	45mm x 75mm



P45 - E14 Clear Glass

4W VT-1996
4300 2700K Warmwhite
4425 4500K Daywhite
4426 6000K White

EAN Code
3800230629944
3800157606394
3800157606400



EQ. Watts:	40W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	P45	Body Type:	Glass
LED Type:	Filament	Dimension:	45mm x 77mm
CRI:	> 80		



Dimmable P45- E14 Clear Glass

4W VT-1996D
4394 2700K Warmwhite

EAN Code
3800157604314



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V,50Hz	PF	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	P45	Base:	E14
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	45mm x 77mm



Dimmable G125 - E27 Clear Glass

4W VT-1994D

EAN Code

4399 2700K Warmwhite

3800157605021



EQ. Watts:	30W	Dimmable:	Yes
Voltage/Frequency:	AC:220-240V,50Hz	PF:	>0.5
Luminous Flux:	320lm	Beam Angle:	300°
Commercial Type:	G125	Base:	E27
LED Type:	Filament	Body Type:	Glass
CRI:	>80	Dimension:	125mm x 165mm



G125 - E27 Clear Glass

6W VT-1983

EAN Code

4304 2700K Warmwhite

3800157600316



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	550lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125mm x 165mm
CRI:	> 80		



G95- E27 Clear Glass

6W VT-1993

EAN Code

4305 2700K Warmwhite

3800157600323



EQ. Watts:	60W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	550lm	Base:	E27
Commercial Type:	G95	Body Type:	Glass
LED Type:	Filament	Dimension:	95mm x 135mm
CRI:	> 80		



G125 - E27 Clear Glass

10W VT-1979

EAN Code

4422 2700K Warmwhite

3800157606363

4423 4500K Daywhite

3800157606370

4424 6000K White

3800157606387



EQ. Watts:	75W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	300°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	G125	Body Type:	Glass
LED Type:	Filament	Dimension:	125mm x 165mm
CRI:	>80		






R7S Bulb

7W VT-1917

EAN Code

7123 3000k Warmwhite
7124 4000K Daywhite
7125 6400k White

3800157610032
3800157610049
3800157610056



EQ. Watts:	40W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	360°
Luminous Flux:	470lm	Base:	R7S
Commercial Type:	R7S	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	25mm x 118mm
CRI:	>80		




R7S Bulb

10W VT-1990


EAN Code

4369 3000K Warmwhite
4389 4000K Daywhite
4390 6400K White

3800157602952
3800157604130
3800157604147



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	360°
Luminous Flux:	1000lm	Base:	R7S
Commercial Type:	R7S	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	25mm x 118mm
CRI:	>80		

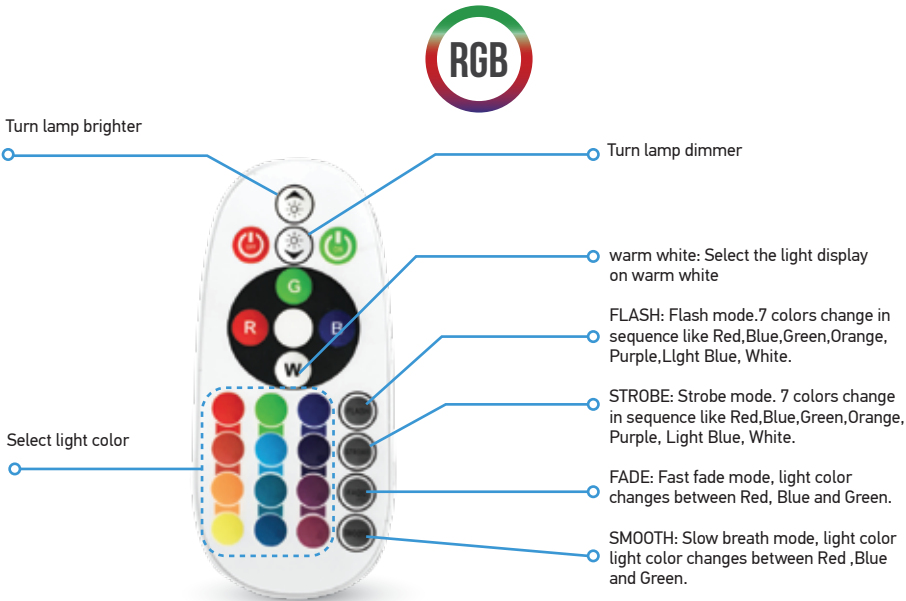

Under these 4 modes you can choose the Brighter / dimmer key on the controller to make the speed faster/Slower.

RGB Bulb

10W VT-2022

EAN Code

- 7121 RGB + 3000k Warmwhite 3800157609975
- 7150 RGB + 4000K Daywhite 3800157610711
- 7151 RGB + 6400k White 3800157610728



EQ. Watts:	40W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50HzV	Beam Angle:	200°
Luminous Flux:	470lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 110mm
CRI:	>80		

A60 With Sensor Light

www.v-tac.eu | www.vtacexports.com

Our smart sensor bulbs are built in with photocells with transmits Signal to light source as per lumen conditions smartly and saves power by going onto Light mode, enabling you to save power and reduce consumption of power when not required.




9W VT-2016

4459 3000K Warmwhite
4460 4500K Daywhite
4461 6000K White

EAN Code

3800157608237
 3800157608244
 3800157608251



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	E27
Commercial Type:	A60	Body Type:	Plastic
LED Type:	SMD	Dimension:	60mm x 112 mm
CRI:	>80		

A60 3-Step Dimming

Smart Dimming Technology Without A Dimmer!

At the click of button, change the lighting Power from 100% to 50% and if need to Reduce more click again to go to 15%.




9W VT-2011

4447 3000K Warmwhite
4448 4500K Daywhite
4449 6000K White

EAN Code

3800157607988
 3800157607995
 3800157608008



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	E27
Commercial Type:	A60	Body Type:	Plastic
LED Type:	SMD	Dimension:	60mm x 112 mm
CRI:	>80		

DC24V

Ideal Use for marine, solar/wind systems, fishing, motor home/RV, buses, vehicles systems, etc.




9W VT-2059

7224 6400k White

EAN Code

3800157617543



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm-At 100% ON	Base:	E27
Commercial Type:	A60	Body Type:	Plastic
LED Type:	SMD	Dimension:	60mm x 112 mm
CRI:	>80		



A60 - E27 Bulb

9W VT-1900

- 7240 2700k Warm White
- 7241 4000K Day White
- 7242 6400k White

EAN Code

- 3800157620130
- 3800157620147
- 3800157620154



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 112mm
CRI:	>80		



A60 - B22 Bulb

9W VT-2069

- 7246 2700k Warm White

EAN Code

- 3800157620192



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	B22
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 112mm
CRI:	>80		

**A60 - E27 Bulb****7W** VT-2007

4376 3000K Warmwhite
 4377 4500K Daywhite
 4378 6000K White

EAN Code

3800157603850
 3800157603867
 3800157603874



EQ. Watts:	45W	PF:	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	200°
Luminous Flux:	470lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 108mm
CRI:	>80		

**A60 - E27 Bulb****10W** VT-1853

4209 3000K Warmwhite
 4226 4500K Daywhite
 4227 6000K White

EAN Code

3800230623591
 3800230626271
 3800230626288



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 112mm
CRI:	> 80		

**A60 - E27 Bulb****12W** VT-1864

4228 3000K Warmwhite
 4229 4500K Daywhite
 4230 6000K White

EAN Code

3800230626295
 3800230626301
 3800230626318



EQ. Watts:	75W	PF:	> 0.7
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 118mm
CRI:	> 80		



Dimmable A60 - E27 Bulb

10W VT-1853D
4282 3000K Warmwhite

EAN Code
3800230628503



EQ. Watts:	60W	Dimmable::	Yes
Voltage/Frequency:	AC: 220-240V,50Hz	PF:	> 0.5
Luminous Flux:	806lm	Beam Angle:	200°
Commercial Type:	A60	Base:	E27
LED Type:	SMD	Body Type:	Thermal Plastic
CRI:	> 80	Dimension:	60mm x 112mm



Dimmabl A60 - E27 Bulb

12W VT-1864D
4275 3000K Warmwhite

EAN Code
3800230627872



EQ. Watts:	75W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50Hz	PF	> 0.7
Luminous Flux:	1055lm	Beam Angle:	200°
Commercial Type:	A60	Base:	E27
LED Type:	SMD	Body Type:	Thermal Plastic
CRI:	> 80	Dimension:	60mm x 118mm



A65 - E27 Bulb

15W VT-2015

4453 3000K Warmwhite
4454 4500K Daywhite
4455 6000K White

EAN Code

3800157608091
3800157608107
3800157608114



EQ. Watts:	100W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1500lm	Base:	E27
Commercial Type:	A65	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	65mm x 130mm
CRI:	>80		



A65 - E27 Bulb

17W VT-2017

4456 3000K Warmwhite
4457 4500K Daywhite
4458 6000K White

EAN Code

3800157608121
3800157608138
3800157608145



EQ. Watts:	125W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1800lm	Base:	E27
Commercial Type:	A65	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	65mm x 130mm
CRI:	>80		





A60 - B22 Bulb


7W VT-1828

4175 3000K Warmwhite
4197 4500K Daywhite
4176 6000K White

EAN Code

3800230620859
3800230624437
3800230620866

A+



EQ. Watts:	45W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	270°
Luminous Flux:	470lm	Base:	B22
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 108mm
CRI:	> 80		



A60 - B22 Bulb


10W VT-1853

4442 3000K Warmwhite
4443 4500K Daywhite
4324 6000K White

EAN Code

3800157607681
3800157607698
3800157601061

A+




EQ. Watts:	60W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	B22
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 108mm
CRI:	> 80		



A60 - B22 Bulb

12W VT-1864
7221 3000K Warmwhite
7222 4500K Daywhite
7223 6000K White

EAN Code
3800157617314
3800157617321
3800157617338




EQ. Watts:	75W	PF:	> 0.7
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1055lm	Base:	B22
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x 118mm
CRI:	> 80		



A65 - B22 Bulb

15W VT-2015
7229 3000K Warmwhite

EAN Code
3800157619554




EQ. Watts:	100W	PF	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1500lm	Base:	B22
Commercial Type:	A65	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	65mm x 130mm
CRI:	>80		



G45 - B22 Bulb

3W VT-2053
7232 3000K Warmwhite
7233 6000K White

EAN Code
3800157619776
3800157619783




EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	250lm	Base:	B22
Commercial Type:	G45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 75mm
CRI:	> 80		



G45 - B22 Bulb

6W VT-1973
4441 3000K Warmwhite

EAN Code
3800157607674




EQ. Watts:	40W	PF	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	470lm	Base:	B22
Commercial Type:	G45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 82mm
CRI:	>80		



Candle -B22 Bulb

3W VT-2073
7230 2700k Warm White
7231 6400k White

EAN Code
3800157619578
3800157619585



EQ. Watts:	25W	PF:	>0.4
Voltage/Frequency:	AC: 220-240V,50HZ	Beam Angle:	200°
Luminous Flux:	250lm	Base:	B22
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 100mm
CRI:	> 80		




Candle - B22 Bulb

6W VT-1965

4440 3000K Warmwhite

EAN Code

3800157607667



EQ. Watts:	40W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	470lm	Base:	B22
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 102mm
CRI:	>80		



Candle - E14 Bulb

3W VT-2033

7196 3000K Warmwhite

7197 4500K Daywhite


7198 6000K White

EAN Code

3800157615808

3800157615815

3800157615822



EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	250lm	Base:	E14
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 100mm
CRI:	> 80		



Candle -E14 Bulb

4W VT-1818

4216 3000K Warmwhite

4166 4500K Daywhite


4122 6000K White

EAN Code

3800230624796

3800230620675

3800230620668



EQ. Watts:	30W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	320lm	Base:	E14
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 100mm
CRI:	> 80		



Candle - E14 Bulb

6W VT-1855

4215 3000K Warmwhite
4258 4500K Daywhite
4241 6000K White

EAN Code

3800230624789
3800230627155
3800230626790



EQ. Watts:	40W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	470lm	Base:	E14
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 102mm
CRI:	> 80		




Dimmable Candle - E14 Bulb

6W VT-1854D

4213 3000K Warmwhite

EAN Code

3800230624765



EQ. Watts:	40W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50Hz	PF:	> 0.5
Luminous Flux:	470lm	Beam Angle:	200°
Commercial Type:	Candle	Base:	E14
LED Type:	SMD	Body Type:	Thermal Plastic
CRI:	> 80	Dimension:	37mm x 102mm



Candle - E27 Bulb

6W VT-1821

4342 3000K Warmwhite
4343 4500K Daywhite
4344 6000K White

EAN Code

3800157601733
3800157601740
3800157601757



EQ. Watts:	40W	PF	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	200°
Luminous Flux:	470lm	Base:	E27
Commercial Type:	Candle	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 102mm
CRI:	>80		



Candle Flame - E14 Bulb

4W VT-1818 TP

EAN Code

4164 3000K Warmwhite

3800230620743


4156 4500K Daywhite

3800230620736

4354 6000K White

3800157602457

A+



EQ. Watts:	30W	PF	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	320lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	38mm x 117mm
CRI:	> 80		



Candle Flame -E14 Bulb

6W VT-1855TP

EAN Code

4351 3000K Warmwhite

3800157602426


4352 4500K Daywhite

3800157602433

4353 6000K White

3800157602440

A+



EQ. Watts:	40W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	470lm	Base:	E14
Commercial Type:	Candle Flame	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 117mm
CRI:	>80		




ST26-E14

2W VT-2032

7237 2700k Warm White
7238 4000K Day White
7239 6400k White

EAN Code

3800157620109
3800157620116
3800157620123



EQ. Watts:	20W	PF	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	150°
Luminous Flux:	180lm	Base:	E14
Commercial Type:	ST26	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	25mm x 59mm
CRI:	> 80		




T37 - E14 Bulb

9W VT-2029

7173 2700k Warmwhite
7174 4000K Daywhite
7175 6400k White

EAN Code

3800157615495
3800157615501
3800157615518



EQ. Watts:	60W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	230°
Luminous Flux:	750lm	Base:	E14
Commercial Type:	T37	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 115mm
CRI:	>80		




T37 - 27 Bulb

9W VT-2089

7256 2700k Warm White
7257 4000K Day White
7258 6400k White

EAN Code

3800157621915
3800157621922
3800157621939



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	230°
Luminous Flux:	750lm	Base:	E27
Commercial Type:	T37	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	37mm x 115mm
CRI:	>80		




G45 - E27 Bulb

3W VT-2053

7202 3000K Warmwhite
7203 4500K Daywhite
7204 6000K White

EAN Code

3800157615860
3800157615877
3800157615884



EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	250lm	Base:	E27
Commercial Type:	G45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 75mm
CRI:	> 80		




G45 - E27 Bulb

4W VT-1830

4160 3000K Warmwhite
4162 4500K Daywhite
4207 6000K White

EAN Code

3800230621047
3800230621054
3800230624611



EQ. Watts:	30W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	320lm	Base:	E27
Commercial Type:	G45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 75mm
CRI:	> 80		




G45 - E27 Bulb

6W VT-1879

4247 3000K Warmwhite
4248 4500K Daywhite
4249 6000K White

EAN Code

3800230627018
3800230627025
3800230627032



EQ. Watts:	40W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	470lm	Base:	E27
Commercial Type:	G45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 75mm
CRI:	> 80		



P45 - E14 Bulb


3W VT-2043

7199 3000K Warmwhite
7200 4500K Daywhite
7201 6000K White

EAN Code

3800157615839
3800157615846
3800157615853

A+



EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	250lm	Base:	E14
Commercial Type:	P45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 80mm
CRI:	> 80		



P45 - E14 Bulb


4W VT-1819

4123 3000K Warmwhite
4174 4500K Daywhite
4124 6000K White

EAN Code

3800230620996
3800230621009
3800230621016

A+



EQ. Watts:	30W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	320lm	Base:	E14
Commercial Type:	P45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 80mm
CRI:	> 80		



P45 - E14 Bulb


6W VT-1880

4250 3000K Warmwhite
4251 4500K Daywhite
4252 6000K White

EAN Code

3800230627049
3800230627056
3800230627063

A+



EQ. Watts:	40W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	470lm	Base:	E14
Commercial Type:	P45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x 80mm
CRI:	> 80		




R39 - E14 Bulb

3W VT-1861

- 4219 3000K Warmwhite
- 4220 4500K Daywhite
- 4242 6000K White

EAN Code

- 3800230625472
- 3800230625489
- 3800230626806



EQ. Watts:	25W	PF:	> 0.4
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	210lm	Base:	E14
Commercial Type:	R39	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	39mm x 67mm
CRI:	> 80		




R50 - E14 Bulb

6W VT-1876

- 4243 3000K Warmwhite
- 4138 4500K Daywhite
- 4246 6000K White

EAN Code

- 3800230626813
- 3800230620897
- 3800230626967



EQ. Watts:	40W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	400lm	Base:	E14
Commercial Type:	R50	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	50mm x 86mm
CRI:	> 80		




R63 - E27 Bulb

8W VT-1862

4221 3000K Warmwhite
4140 4500K Daywhite
4244 6000K White

EAN Code

3800230625496
3800230620903
3800230626820



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	500lm	Base:	E27
Commercial Type:	R63	Body Type:	Plastic
LED Type:	SMD	Dimension:	63mm x 100mm
CRI:	> 80		




R80 - E27 Bulb

10W VT-1894

4339 3000K Warmwhite
4340 4500K Daywhite
4341 6000K White

EAN Code

3800157601702
3800157601719
3800157601726




EQ. Watts:	75W	PF	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	800lm	Base:	E27
Commercial Type:	R80	Body Type:	Plastic
LED Type:	SMD	Dimension:	80mm x 114mm
CRI:	>80		



PL - E27 Bulb

6W VT-2046
7211 3000k Warm White

EAN Code
3800157617031




EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	480lm	Base:	E27
Commercial Type:	PL	Body Type:	Plastic + Aluminum
LED Type:	SMD	Dimension:	38 x 145mm
CRI:	>80		



PL - E27 Bulb

10W VT-2050
7215 3000k Warm White

EAN Code
3800157617079




EQ. Watts:	85W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	820lm	Base:	E27
Commercial Type:	PL	Body Type:	Plastic + Aluminum
LED Type:	SMD	Dimension:	157 x 38mm
CRI:	>80		



PL - G24 Bulb

6W VT-2046
7210 3000k Warm White
7209 4500k Day White
7208 6000k White

EAN Code
3800157617024
3800157617017
3800157617000




EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	480lm	Base:	G24
Commercial Type:	PL	Body Type:	Plastic + Aluminum
LED Type:	SMD	Dimension:	38 x 145mm
CRI:	>80		



PL - G24 Bulb

10W VT-2050
7214 3000k Warm White
7213 4500k Day White
7212 6000k White

EAN Code
3800157617062
3800157617055
3800157617048



EQ. Watts:	85W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	820lm	Base:	G24
Commercial Type:	PL	Body Type:	Plastic + Aluminum
LED Type:	SMD	Dimension:	38 x 157mm
CRI:	>80		



G95 - E27 Globe Bulb

10W VT-1893

4276 3000K Warmwhite
4277 4500K Daywhite
4278 6000K White

EAN Code

3800230627889
3800230627896
3800230627902



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	810lm	Base:	E27
Commercial Type:	G95	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	95mm x 133mm
CRI:	> 80		



Dimmable G95 - E27 Globe Bulb

10W VT-1893D

4279 3000K Warmwhite

EAN Code

3800230627919



EQ. Watts:	60W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50Hz	PF	> 0.5
Luminous Flux:	810lm	Beam Angle:	200°
Commercial Type:	G95	Base:	E27
LED Type:	SMD	Body Type:	Thermal Plastic
CRI:	> 80	Dimension:	95mm x 133mm




G120 - E27 Globe Bulb

13W VT-1883

EAN Code

4253 3000K Warmwhite
4273 4500K Daywhite
4274 6000K White

3800230627094
3800230627858
3800230627865



EQ. Watts:	75W	PF:	> 0.7
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	G120	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	120mm x 158mm
CRI:	> 80		




Dimmable G120 - E27 Globe Bulb

13W VT-1884D

EAN Code

4254 3000K Warmwhite

3800230627100



EQ. Watts:	75W	Dimmable:	Yes
Voltage/Frequency:	AC: 220-240V,50Hz	PF	> 0.7
Luminous Flux:	1055lm	Beam Angle:	200°
Commercial Type:	G120	Base:	E27
LED Type:	SMD	Body Type:	Thermal Plastic
CRI:	> 80	Dimension:	120mm x 158mm




G120 - E27 Globe Bulb

18W VT-1899

EAN Code

4433 3000K WarmWhite
4434 4500K DayWhite
4435 6000K White

3800157606806
3800157606813
3800157606820



EQ. Watts:	115W	PF	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1800lm	Base:	E27
Commercial Type:	G120	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	120mm x 158mm
CRI:	>80		




Corn Shaped - E27 Bulb

20W VT-2021

EAN Code

7135 3000K WarmWhite
7136 4000K Day White
7137 6400k White

3800157610506
3800157610513
3800157610520



EQ. Watts:	135W	PF:	>0.7
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	1800lm	Base:	E27
Commercial Type:	Corn bulb	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	80mm x 150mm
CRI:	>80		




Corn Shaped - E27 Bulb

30W VT-2031

EAN Code

7138 4000K Day White
7139 6400k White

3800157610537
3800157610544



EQ. Watts:	160W	PF	>0.9
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	2700lm	Base:	E27
Commercial Type:	Corn bulb	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	118mm x 220mm
CRI:	>80		




Corn Shaped - E27 Bulb

40W VT-2041

EAN Code

7140 4000K Day White
7141 6400k White

3800157610551
3800157610568




EQ. Watts:	200W	PF	>0.9
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	200°
Luminous Flux:	3600lm	Base:	E27
Commercial Type:	Corn bulb	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	118mm x 220mm
CRI:	>80		

UFO Ceiling Lamp- E27

15W VT-2116

7158 3000k Warm White
7159 4000k Day White
7160 6400k White

EAN Code
3800157612494
3800157612500
3800157612517




EQ. Watts:	90W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	1350lm	Base:	E27
Commercial Type:	F150	Body Type:	PC
LED Type:	SMD	Dimension:	150 x 80 mm
CRI:	>80		

UFO Ceiling Lamp- E27

24W VT-2124

7161 3000k Warm White
7162 4000k Day White
7163 6400k White

EAN Code
3800157612524
3800157612531
3800157612548




EQ. Watts:	160W	PF	>0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	2610lm	Base:	E27
Commercial Type:	F200	Body Type:	PC
LED Type:	SMD	Dimension:	200 x 80mm
CRI:	>80		

UFO Ceiling Lamp- E27

36W VT-2136

7164 3000k Warm White
7165 4000k Day White
7166 6400k White

EAN Code
3800157612555
3800157612562
3800157612579



EQ. Watts:	190W	PF	>0.9
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	3240lm	Base:	E27
Commercial Type:	F250	Body Type:	PC
LED Type:	SMD2835	Dimension:	250 x 80mm
CRI:	>80		



ED-90 - E27 Bulb

40W VT-1940

- 7132 3000K WarmWhite
- 7133 4000K Day White
- 7134 6500K White

EAN Code
3800157610285
3800157610292
3800157610308



EQ. Watts:	250W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50Hz/60Hz	Beam Angle:	265°
Luminous Flux:	3500lm	Base:	E27
Commercial Type:	ED-90	Body Type:	Aluminum+PC
LED Type:	SMD	Dimension:	90mm x 220mm
CRI:	>80		






P45 - E14 Bulb

6W VT-1880
4331 3000K Warmwhite

EAN Code
3800157601184



EQ. Watts:	40W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	180°
Luminous Flux:	470lm	Base:	E14
Commercial Type:	P45	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	45mm x80mm
CRI:	> 80		



A60 - E27 Filament Bulb

6W VT-1887
4332 2700K Warmwhite

EAN Code
3800157601191



EQ. Watts:	60W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	550lm	Base:	E27
Commercial Type:	A60	Body Type:	Glass
LED Type:	Filament	Dimension:	60mm x107mm
CRI:	> 80		



A60 - E27 Bulb

10W VT-1853
4325 3000K Warmwhite

EAN Code
3800157601122



EQ. Watts:	60W	PF:	> 0.5
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	200°
Luminous Flux:	806lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x108mm
CRI:	> 80		



A60 - E27 Bulb

12W VT-1864
4327 3000K Warmwhite

EAN Code
3800157601146



EQ. Watts:	75W	PF	> 0.7
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	200°
Luminous Flux:	1055lm	Base:	E27
Commercial Type:	A60	Body Type:	Thermal Plastic
LED Type:	SMD	Dimension:	60mm x118mm
CRI:	> 80		



B22-E14 Converter

SKU Code 3420



B22-E27 Converter

SKU Code 3419



E40-E27 Converter

SKU Code 3417



LED Spot Lights

Introducing sustainable & energy efficient substitute for the power consuming 35W and 50W Halogen Spotlights. An extensive range of LED SPOTLIGHTS (1.2W - 8W)

Product Features

- Lasts 20 times longer than Standard Bulbs
- Uses 80% less energy than Standard Bulbs
- Excellent Heat Radiation Efficiency
- Customized exterior for stronger body
- Choice of beam angle from 38° to 120°
- Non – Flickering
- Premium Quality Power Driver
- Broad Range of holders like GU10, MR16, G9 and G4
- Wide Voltage Range from AC: 180 – 240 V , 50/60 Hz & 12 v options
- Dimmable & Non Dimmable options



Applications

Perfect choice for Hotels, Bars, Commercial & Residential Lighting and Exhibition Stands

GU 10 with Lens

7W VT-2666

EAN Code

1657 3000K Warmwhite
1658 4500K Daywhite
1659 6000K White

3800157601641
3800157601658
3800157601665

A+



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	38°
Luminous Flux:	550lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 57mm



Dimmable

Dimmable GU 10 with Lens

7W VT-2886D

EAN Code

1666 3000K Warmwhite
1667 4500K Daywhite
1668 6000K White

3800157602075
3800157602082
3800157602099

A+



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	38°
Luminous Flux:	550lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 57mm
Dimmable:	Yes		



GU 10 with Lens

7W VT-2778

EAN Code

1672 3000K Warmwhite
1673 4500K Daywhite
1674 6000K White

3800157602136
3800157602143
3800157602150

A+



EQ. Watts:	45W	PF:	>0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	500lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	> 80	Dimension:	50mm x 57mm




MR 16 with Lens

7W VT-1967

1693 3000K Warmwhite
1664 4500K Daywhite
1665 6000K White

EAN Code

3800157602044
 3800157602051
 3800157602068



EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC/DC: 12V,50Hz	Beam Angle:	38°
Luminous Flux:	550lm	Base:	GU5.3
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 50mm


GU 10 with Lens

8W VT-2889

1693 3000k Warmwhite
1694 4000k Daywhite
1695 6400k White

EAN Code

3800157608947
 3800157608954
 3800157608961



EQ. Watts:	80W	PF	> 0.5
Voltage/Frequency:	AC: 220-240V,50Hz	Beam Angle:	38°
Luminous Flux:	750lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	> 80	Dimension:	50mm x 55mm

First time 8W GU10 with
750 lumens

Milky Cover GU10**7W** VT-2779

EAN Code

1682 3000K Warmwhite
 1683 4500K Daywhite
 1684 6000K White

3800157602044
 3800157602051
 3800157602068

A+


EQ. Watts:	45W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	500lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 57mm

**Dimmable****Dimmable Milky Cover GU10****7W** VT-2887D

EAN Code

1669 3000K Warmwhite
 1670 4500K Daywhite
 1671 6000K White

3800157608947
 3800157608954
 3800157608961

A+


EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	500lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 57mm
Dimmable:	Yes		

Milky Cover MR16**7W** VT-1977

EAN Code

1688 3000K Warmwhite
 1689 4500K Daywhite
 1690 6000K White

3800157606950
 3800157606967
 3800157606974

A+

EQ. Watts:	50W	PF:	>0.5
Voltage/Frequency:	AC/DC: 12V,50Hz	Beam Angle:	110°
Luminous Flux:	500lm	Base:	GU5.3
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 50mm

Milky Cover GU10

5W VT-1975

1685 3000K Warmwhite
1686 4500K Daywhite
1687 6000K White

EAN Code

3800157606240
 3800157606257
 3800157606264

A+



EQ. Watts:	40W	PF:	>0.4
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	320lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 58mm

Milky Cover GU10


3W VT-1933

7126 3000k Warm White
7127 4500k Day White
7128 6000k White

EAN Code

3800157610148
 3800157610155
 3800157610162

A+



EQ. Watts:	25W	PF:	>0.4
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	210lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	50mm x 58mm

GU10 Spotlight

2W VT-2002

7167 3000K WarmWhite
7168 4500K DayWhite
7169 6000K White

EAN Code

3800157612807
 3800157602051
 3800157602068

A+



EQ. Watts:	15W	PF:	>0.4
Voltage/Frequency:	AC/DC: 12V,50Hz	Beam Angle:	38°
Luminous Flux:	180lm	Base:	GU10
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	35mm x 46.5mm




MR 11 Spot light

2W VT-1992


1679 3000K WarmWhite
1680 4500K DayWhite
1681 6000K White

EAN Code

3800157605038
3800157605045
3800157605052



EQ. Watts:	15W	PF:	>0.4
Voltage/Frequency:	AC/DC:12V,50Hz	Beam Angle:	38°
Luminous Flux:	140lm	Base:	GU4
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	35mm x 39mm



Recessed Gx53



7W VT-1969

4437 3000K Warmwhite
4438 4500K Daywhite
4439 6000K White

EAN Code

3800157607032
3800157607049
3800157607056

EQ. Watts:	45W	PF	> 0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	110°
Luminous Flux:	550lm	Base:	Recessed Gx53
Commercial Type:	G53	Body Type:	Thermoplastic
LED Type:	SMD	Dimension:	75 x 23.5 mm
CRI:	> 80		



G4 Spot light 1pc Pack

1.5W VT-1942

EAN Code

4463 3000K Warmwhite

3800157608978


4464 4500K Daywhite

3800157608985

4465 6000K White

3800157608992

A+



EQ. Watts:	15W	PF:	>0.4
Voltage/Frequency:	AC/DC:12V	Beam Angle:	300°
Luminous Flux:	100lm	Base:	G4
LED Type:	SMD	Body Type:	Plastic
CRI:	> 80	Dimension:	12.2mm x 38mm



Dimmable



Milky Cover-G9

3W VT-2083D

EAN Code

7253 2700k Warm White


3800157621656

7254 4000K Day White

3800157621663

7255 6400k White

3800157621670



EQ. Watts:	30W	PF:	>0.5
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	360°
Luminous Flux:	225lm	Base:	G9
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	18.5 x 55.5mm
Dimmable:	Yes		

G9 Spot light

2.5W VT-1946

7205 3000K Warmwhite
7206 4500K Daywhite
7207 6000K White

1pc Pack

EAN Code


3800157616317
 3800157616324
 3800157616331

3pc Blister Pack

4358 3000K Warmwhite
4359 4500K Daywhite
4360 6000K White

EAN Code

3800157602716
 3800157602723
 3800157602730



EQ. Watts:	25W	PF	>0.4
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	300°D
Luminous Flux:	200lm	Base:	G9
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	16mm x 48mm


G9 Spot light

3W VT-2003

7243 2700k Warm White
7244 4000K Day White
7245 6400k White

EAN Code

3800157620161
 3800157620178
 3800157620185



EQ. Watts:	30W	PF	>0.5
Voltage/Frequency:	AC:220-240V, 50Hz	Beam Angle:	300°
Luminous Flux:	300lm	Base:	G9
LED Type:	SMD	Body Type:	Plastic
CRI:	>80	Dimension:	17mm x 49mm


G9 Spot light 3pc Blister Pack

4W VT-1849

4295 3000K Warmwhite
4296 4500K Daywhite
4297 6000K White

EAN Code

3800230628961
 3800230628978
 3800230628985



EQ. Watts:	30W	PF	>0.4
Voltage/Frequency:	AC: 220-240V, 50/60Hz	Beam Angle:	150°
Luminous Flux:	320lm	Base:	G9
LED Type:	SMD	Body Type:	Plastic
CRI:	> 80	Dimension:	23mm x 65mm

GU10 SOCKET

■ NOT INCLUDED ■



Gypsum Fitting

Model No:	VT-762	VT-763	VT-764
SKU Code:	3648	3649	3650
Base:	GU10	GU10	GU10
Material:	Gypsum	Gypsum	Gypsum
Shape:	Square	Square	Round
Color of Fixture:	White	White	White
Dimension:	290 x 140 x 80mm	190 x 140 x 80mm	Ø140 x 140 x 40mm
Cutting Size:	215 x 120mm	120 x 120mm	Ø100mm
EAN Code:	3800157618588	3800157618595	3800157618601

GU10 SOCKET

■ NOT INCLUDED ■



Gypsum Fitting

Model No:	VT-765	VT-771	VT-772
SKU Code:	3651	3652	3653
Base:	GU10	GU10	GU10
Material:	Gypsum	Gypsum	Gypsum
Shape:	Square	Round	Square
Color of Fixture:	White	White	White
Dimension:	170 x 120 x 35mm	Ø140 x 140 x 45mm	190 x 140 x 80mm
Cutting Size:	100 x 100mm	Ø103mm	121 x 121mm
EAN Code:	3800157618618	3800157618625	3800157618632




GU10 SOCKET
■ NOT INCLUDED ■



Gypsum **Fitting**

Model No:	VT-773	VT-776	VT-776
SKU Code:	3654	3640	3641
Base:	GU10	GU10	GU10
Material:	Gypsum	Gypsum	Gypsum
Shape:	Round	Round	Square
Color of Fixture:	White	White	White
Dimension:	Ø170 x 170 x 90mm	Ø150 x 150 x 60mm	190 x 140 x 60mm
Cutting Size:	Ø132mm	Ø50mm	120x 50mm
EAN Code:	3800157618649	3800157616348	3800157616355

GU10 SOCKET
■ NOT INCLUDED ■






Ferrum **Fitting**

Model No:	VT-778	VT-778	VT-778
SKU Code:	3584	3585	3586
Base:	GU10	GU10	GU10
Material:	Ferrum	Ferrum	Ferrum
Shape:	Round	Round	Round
Color of Fixture:	White	Satin Nickel	Chrome
Dimension:	Ø80 x 30mm	Ø80 x 30mm	Ø80 x 30mm
Cutting Size:	Ø65mm	Ø65mm	Ø65mm
EAN Code:	3800157607131	3800157607148	3800157607155

GU10 SOCKET

■ NOT INCLUDED ■






Zinc Alloy Fitting

Model No:	VT-779	VT-779	VT-779
SKU Code:	3590	3591	3592
Base:	GU10	GU10	GU10
Material:	Zinc alloy	Zinc alloy	Zinc alloy
Shape:	Square	Square	Square
Color of Fixture:	White	Satin Nickel	Chrome
Dimension:	82 x 82 x 22mm	82 x 82 x 22mm	82 x 82 x 22mm
Cutting Size:	74 x 74mm	74 x 74mm	74 x 74mm
EAN Code:	3800157607193	3800157607209	3800157607216

GU10 SOCKET




■ NOT INCLUDED ■



Zinc Alloy Fitting

Model No:	VT-779	VT-779	VT-779
SKU Code:	3587	3588	3589
Base:	GU10	GU10	GU10
Material:	Zinc Alloy	Zinc alloy	Zinc alloy
Shape:	Round	Round	Round
Color of Fixture:	White	Satin Nickel	Chrome
Dimension:	Ø82 x 25mm	Ø82 x 25mm	Ø82 x 25mm
Cutting Size:	Ø74mm	Ø74mm	Ø74mm
EAN Code:	3800157607162	3800157607179	3800157607186




GU10 SOCKET
■ NOT INCLUDED ■



Aluminium Fitting

Model No:	VT-774	VT-774	VT-774
SKU Code:	3642	3643	3644
Base:	GU10	GU10	GU10
Material:	Aluminium	Aluminium	Aluminium
Shape:	Round	Round	Round
Color of Fixture:	White	Satin Nickel	Metallic Grey
Dimension:	Ø81 x 34mm	Ø81 x 34mm	Ø81 x 34mm
Cutting Size:	Ø73mm	Ø73mm	Ø73mm
EAN Code:	3800157617086	3800157617093	3800157617109




GU10 SOCKET
■ NOT INCLUDED ■



Aluminium Fitting

Model No:	VT-775	VT-775	VT-775
SKU Code:	3645	3646	3647
Base:	GU10	GU10	GU10
Material:	Aluminium	Aluminium	Aluminium
Shape:	Round	Round	Round
Color of Fixture:	White	Satin Nickel	Metallic Grey
Dimension:	Ø95 x 32mm	Ø95 x 32mm	Ø95 x 32mm
Cutting Size:	Ø85mm	Ø85mm	Ø85mm
EAN Code:	3800157617116	3800157617123	3800157617130



GU10 SOCKET
■ NOT INCLUDED ■



Aluminium Fitting

Model No:	VT-7227	VT-7227	VT-7227
SKU Code:	3472	3473	3474
Holder:	GU10	GU10	GU10
Material:	Ferrum	Ferrum	Ferrum
Based:	Recessed	Recessed	Recessed
Body Color:	White	Satin Nickel	Chrome
Shape:	Square	Square	Square
Dimension:	82 x 82 x22mm	82 x 82 x22mm	82 x 82 x22mm
Cutting Size:	74 x74mm	74 x74mm	74 x74mm
EAN Code:	3800157605915	3800157605922	3800157605939



GU10 SOCKET
■ NOT INCLUDED ■



Ferrum Fitting

Model No:	VT-780	VT-780
SKU Code:	3593	3594
Base:	GU10	GU10
Material:	Ferrum	Ferrum
Shape:	Round	Round
Color of Fixture:	White	Satin Nickel
Dimension:	Ø100 x 45mm	Ø100 x 45mm
Cutting Size:	Ø90mm	Ø90mm
EAN Code:	3800157607223	3800157607230



GU10 SOCKET
■ NOT INCLUDED ■



Aluminum+Ferrum Fitting

Model No:	VT-781	VT-781
SKU Code:	3595	3596
Base:	GU10	GU10
Material:	Aluminum+Ferrum	Aluminum+Ferrum
Shape:	Round	Round
Color of Fxture:	White	Satin Nickel
Dimension:	Φ100 x 45mm	Φ100 x 38mm
Cutting Size:	Φ90mm	Φ90mm
EAN Code:	3800157607247	3800157607254


GU10 SOCKET
■ NOT INCLUDED ■



Aluminum+Ferrum Fitting

Model No:	VT-781	VT-781
SKU Code:	3597	3598
Base:	GU10	GU10
Material:	Aluminum+Ferrum	Aluminum+Ferrum
Shape:	Square	Square
Color of Fxture:	White	Satin Nickel
Dimension:	100 x 100 x 38mm	100 x 100 x 38mm
Cutting Size:	90 x 90mm	90 x 90mm
EAN Code:	3800157607261	3800157607278


GU10 SOCKET ■ NOT INCLUDED ■

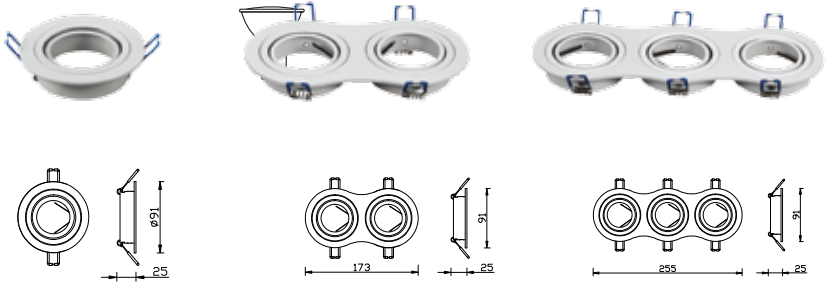

Aluminium Fitting

Model No:	VT-782	VT-783	VT-784
SKU Code:	3599	3601	3603
Base:	GU10	GU10	GU10
Material:	Aluminum	Aluminum	Aluminum
Shape:	Round	Round	Round
Color of Fixture:	White	White	White
Dimension:	Ø91 x 25mm	173 x 91 x 25mm	255 x 91 x 25
Cutting Size:	Ø75mm	155 x 75mm	235 x 75
EAN Code:	3800157607285	3800157607308	3800157607322




GU10 SOCKET ■ NOT INCLUDED ■

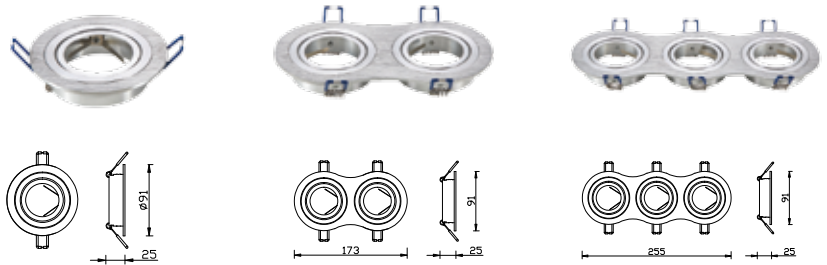

Aluminium Fitting

Model No:	VT-782	VT-783	VT-784
SKU Code:	3600	3602	3604
Base:	GU10	GU10	GU10
Material:	Aluminum	Aluminum	Aluminum
Shape:	Round	Round	Round
Color of Fixture:	Aluminum Brush	Aluminum Brush	Aluminum Brush
Dimension:	Ø91 x 25mm	173 x 91 x 25mm	255 x 91 x 25mm
Cutting Size:	Ø75mm	155 x 75mm	235 x 75mm
EAN Code:	3800157607292	3800157607315	3800157607339




GU10 SOCKET
■ NOT INCLUDED ■



Aluminium Fitting

Model No:	VT-782	VT-783	VT-784
SKU Code:	3605	3607	3609
Base:	GU10	GU10	GU10
Material:	Aluminum	Aluminum	Aluminum
Shape:	Square	Square	Square
Color of Fixture:	White	White	White
Dimension:	91 x 91 x 25mm	173 x 91 x 25mm	255 x 91 x 25mm
Cutting Size:	75mm	155 x 75mm	235 x 75mm
EAN Code:	3800157607346	3800157607360	3800157607384



GU10 SOCKET
■ NOT INCLUDED ■



Aluminium Fitting

Model No:	VT-782	VT-783	VT-784
SKU Code:	3606	3608	3610
Base:	GU10	GU10	GU10
Material:	Aluminum	Aluminum	Aluminum
Shape:	Square	Square	Square
Color of Fixture:	Aluminum Brush	Aluminum Brush	Aluminum Brush
Dimension:	91 x 91 x 25mm	173 x 91 x 25mm	255 x 91 x 25mm
Cutting Size:	75mm	155 x 75mm	235 x 75mm
EAN Code:	3800157607353	3800157607377	3800157607391



GU10 SOCKET
■ NOT INCLUDED ■




Aluminium Fitting

Model No:	VT-785	VT-786
SKU Code:	3611	3612
Base:	GU10	GU10
Material:	Aluminum	Aluminum
Shape:	Round	Round
Color of Fxture:	White	White
Dimension:	Φ88 x 38mm	Φ88 x 38mm
Cutting Size:	Φ75mm	Φ75mm
EAN Code:	3800157607407	3800157607414

GU10 SOCKET
■ NOT INCLUDED ■



**IP54
RATED**
**Matt Glass
DIFFUSER**





**IP54
RATED**
**Matt Glass
DIFFUSER**



Aluminium Fitting

Model No:	VT-787	VT-787
SKU Code:	3613	3614
Base:	GU10	GU10
Material:	Zinc alloy+Ferrum +Glass	Zinc alloy+Ferrum + Glass
Shape:	Round	Round
Color of Fxture:	White	Satin Nickel
Dimension:	Φ84 x 38mm	Φ84 x 38mm
Cutting Size:	Φ75	Φ75mm
EAN Code:	3800157607421	3800157607438

GU10 SOCKET
■ NOT INCLUDED ■



IP54
RATED
Matt Glass
DIFFUSER






IP54
RATED
Matt Glass
DIFFUSER

Aluminium Fitting

Model No:	VT-787	VT-787
SKU Code:	3615	3616
Base:	GU10	GU10
Material:	Zinc alloy+Ferrum + Glass	Zinc alloy+Ferrum + Glass
Shape:	Square	Square
Color of Fixture:	White	Satin Nickel
Dimension:	84 x 84 x 38mm	84 x 84 x 38mm
Cutting Size:	Φ75mm	Φ75mm
EAN Code:	3800157607445	3800157607452

GU10 SOCKET
■ NOT INCLUDED ■




Aluminium Fitting

Model No:	VT-7227	VT-7227	VT-7227
SKU Code:	3469	3470	3471
Base:	GU10	GU10	GU10
Material:	Ferrum	Ferrum	Ferrum
Shape:	Recessed	Recessed	Recessed
Color of Fixture:	White	Satin Nickel	Chrome
Dimension:	Round	Round	Round
Cutting Size:	Φ82 x 25mm	Φ82 x 25mm	Φ82 x 25mm
EAN Code:	Φ74mm	Φ74mm	Φ74mm
	3800157605885	3800157605892	3800157605908


SKU : **3579**
EAN Code : **3800157606981**

SKU : **3580**
EAN Code : **3800157606981**




GU 10 Holder MW/SN
Fire Rated Fitting (Indoor Series)


Model No :	VT-777	F Mark :	Yes
Input voltage :	AC 90-230V, 50/60Hz	Cut-out Min. :	Min.72 mm
Material :	Pressing Metal	Min. ceiling depth :	1,00 mm
IP Rating :	IP20	Max Lamp size :	60 mm
Holder:	GU10	Fire Rated :	90 mins



GU10 Track Fittings



GU10 Track Fittings



GU10 Track Fittings

Aluminium Fitting

SKU CODE	3617	3618	3619
DESCRIPTION	1 x GU10 Track Fitting White	2 x GU10 Track Fitting White	3 x GU10 Track Fitting White
FAN CODE	3800157607469	3800157607476	3800157607483



GU10 Lamp Holder
With PVC Cable

5 PCS PACK
AVAILABLE
SKU-34235

SKU Code	3423
Material	Ceramic
Wire Length	150mm
EAN Code	3800157607827



GU10 Lamp Holder
With PVC Cable

ModelNo.	VT-791
SKU Code	3620
Material	Ceramic
Wire Length	158mm
EAN Code	3800157607704



MR16 Lamp Holder
With PVC Cable

5 PCS PACK


ModelNo.	VT-7889
SKU Code	36265
Material	Ceramic
Wire Length	150mm
EAN Code	3800157609999



GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted


Model No	VT-796
Colour:	White
SKU Code:	3627
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 mm
EAN Code:	3800157612043



GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted


Model No	VT-796
Colour:	Black
SKU Code:	3628
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 mm
EAN Code:	3800157612050



GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted

Model No	VT-796
Colour:	Satin Nickle
SKU Code:	3629
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 mm
EAN Code:	3800157612067






GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted


Model No	VT-797
Colour:	White
SKU Code:	3630
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 x 100 mm
EAN Code:	3800157612074

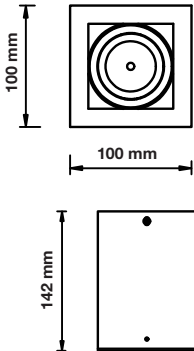

GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted


Model No	VT-797
Colour:	Black
SKU Code:	3631
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 x 100 mm
EAN Code:	3800157612081




GU10 SOCKET
■ NOT INCLUDED ■

GU10 Fittings
Surface Mounted

Model No	VT-797
Colour:	Satin Nickle
SKU Code:	3632
Holder:	GU10
Material:	Ferrum
Dimension:	142 x 100 x 100 mm
EAN Code:	3800157612098



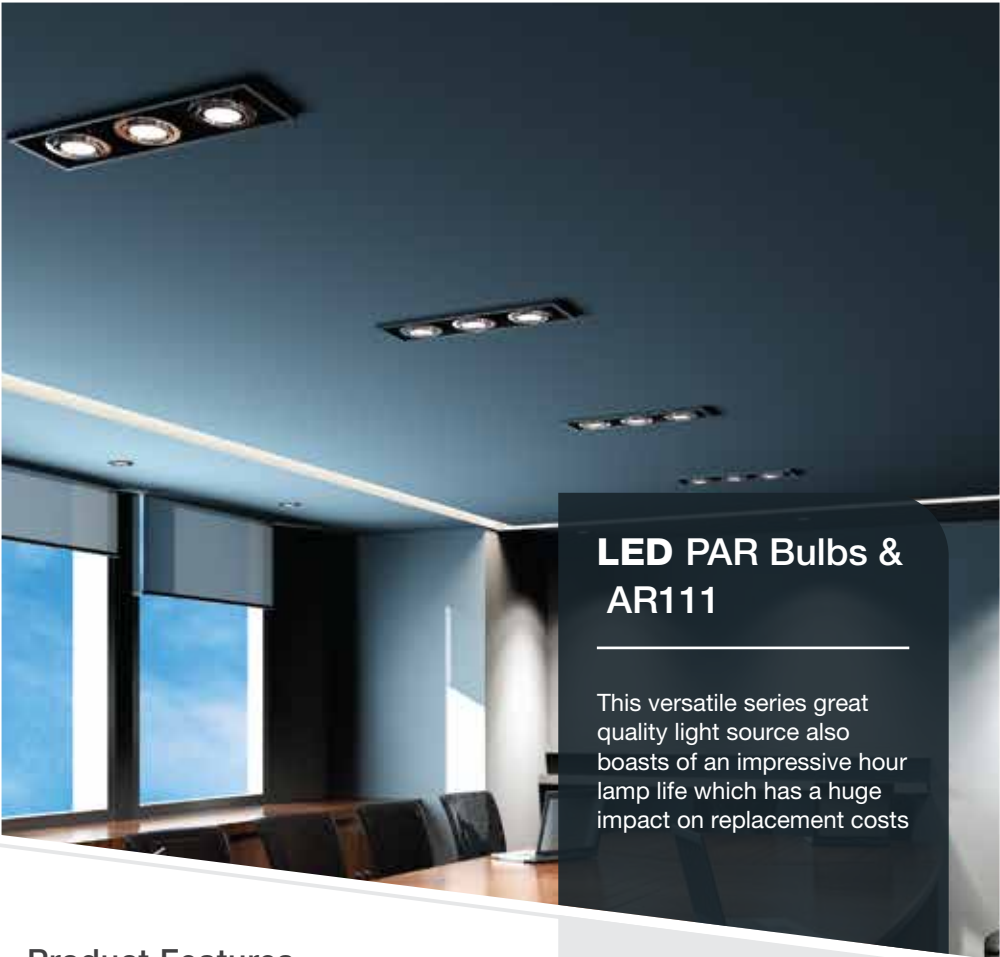

LED PAR Bulbs & AR111

This versatile series great quality light source also boasts of an impressive hour lamp life which has a huge impact on replacement costs

Product Features

- Eco friendly and Power Saving alternative for Standard Halogen Par Lamps with a longer life.
- Each lamp is a direct retrofit for a comparable Halogen Par Lamp e.g. AR111, PAR 30 & PAR 38
- Exceptional Heat Radiation Efficiency
- Non - Flickering
- No UV Radiation
- Premium Quality Power Driver
- Creates better Lighting effect than the old halogen bulb
- Dimmable & Non Dimmable options available



Applications

Widely used in Showrooms, Exhibition Stands, Stores, Offices and Reception areas, Hotels, Bars and Commercial Lighting




GU10 AR111

12W VT-1112

- 4224 3000K Warmwhite
- 4223 4500K Daywhite
- 4225 6000K White

EAN Code
3800230626257
3800230626219
3800230626264



EQ. Watts:	60W	PF:	> 0.9
Voltage/Frequency:	AC: 220-240V, 50Hz	Beam Angle:	40°
Luminous Flux:	650lm	Base:	GU10
Commercial Type:	AR111	Body Type:	Plastic Clad Aluminum
LED Type:	COB	Dimension:	111 x 91 mm
CRI:	> 80		



Dimmable




GU10 AR111

12W VT-1112

- 7234 2700k Warm White
- 7235 4000K Day White
- 7236 6400k White

EAN Code
3800157620055
3800157620062
3800157620079



EQ. Watts:	60W	Dimmable:	Yes
Voltage/Frequency:	AC: 200-240V, 50Hz	PF:	> 0.9
Luminous Flux:	650lm	Beam Angle:	40°
Commercial Type:	AR111	Base:	GU10
LED Type:	COB	Body Type:	Plastic Clad Aluminum
CRI:	> 80	Dimension:	111 x 91 mm



Dimmable



Driver included in Set



94.5 x 45.5 x 28mm


G53 AR111

15W VT-1110 D

4099 3000K Warmwhite
4106 4500K Daywhite
4086 6000K White

EAN Code

3800230620088
3800230620071
3800230626486



EQ. Watts:	75W	Dimmable:	Yes
Voltage/Frequency:	AC: 220V, 50Hz	PF:	> 0.9
Luminous Flux:	780lm	Beam Angle:	20°
Commercial Type:	AR111	Base:	G53
LED Type:	COB	Body Type:	Plastic Clad Aluminum
CRI:	> 80	Dimension:	111 x 86 mm


G53 AR111

15W VT-1110

4257 3000K Warmwhite
4256 4500K Daywhite
4255 6000K White

EAN Code

3800230628664
3800230628657
3800230628640



EQ. Watts:	75W	PF:	> 0.9
Voltage/Frequency:	AC: 12V, 50Hz	Beam Angle:	40°
Luminous Flux:	780lm	Base:	G53
Commercial Type:	AR111	Body Type:	Plastic Clad Aluminum
LED Type:	COB	Dimension:	111 x 86 mm
CRI:	> 80		


G53 AR111

15W VT-1110

4084 3000K Warmwhite
4062 4500K Daywhite
4061 6000K White

EAN Code

3800230620064
3800230620057
3800230620040



EQ. Watts:	75W	PF:	>0.5
Voltage/Frequency:	AC: 12V, 50Hz	Beam Angle:	20°
Luminous Flux:	780lm	Base:	G53
Commercial Type:	AR111	Body Type:	Plastic Clad Aluminum
LED Type:	COB	Dimension:	111 x 86 mm
CRI:	> 80		





AR111 with Driver


20W VT-1120

1243 3000K WarmWhite
1244 4500K DayWhite
1245 6000K White

EAN Code

3800157606004
3800157606011
3800157606028

A



EQ. Watts:	100W	PF:	> 0.7
Voltage/Frequency:	AC: 220-240V, 50/60Hz	Beam Angle:	20°
Luminous Flux:	1500lm	Base:	Die Cast Aluminum
Commercial Type:	AR111	Body Type:	IP20
LED Type:	COB	Dimension:	Φ111 x 61.5mm
CRI:	> 80		



AR111 with Driver


20W VT-1120

1246 3000K WarmWhite
1247 4500K DayWhite
1248 6000K White



EAN Code

3800157606035
3800157606042
3800157606059

A





EQ. Watts:	100W	PF:	> 0.7
Voltage/Frequency:	AC: 220-240V, 50/60Hz	Beam Angle:	40°
Luminous Flux:	1500lm	Base:	Die Cast Aluminum
Commercial Type:	AR111	Body Type:	IP20
LED Type:	COB	Dimension:	Φ111 x 61.5mm
CRI:	> 80		




Aluminum Fitting

Model No. :	VT-7221	VT-7222	VT-7223
SKU Code :	3575	3576	3577
Color :	White	White	White
Holder :	1xAR111	2xAR111	3xAR111
Body Type :	Aluminum	Aluminum	Aluminum
Dimension :	174 x 174 mm	325 x 174 mm	475 x 174 mm
Cutting Size :	168x155mm	305 x 168 mm	455 x 168 mm
EAN Code :	3800157604765	3800157604772	3800157604789



Aluminum Fitting

Model No. :	VT-7221	VT-7222	VT-7223
SKU Code :	3581	3582	3583
Color :	Black	Black	Black
Holder :	1xAR111	2xAR111	3xAR111
Body Type :	Aluminum	Aluminum	Aluminum
Dimension :	174 x 174 mm	325 x 174 mm	475 x 174 mm
Cutting Size :	168x155mm	305 x 168 mm	455 x 168 mm
EAN Code :	3800157607063	3800157607070	3800157607087




PAR 38 - E27

15W VT-1215

4415 3000K WarmWhite
4416 4500K DayWhite
4417 6000K White

EAN Code

3800157606271
3800157606288
3800157606295



EQ. Watts:	100W	PF:	> 0.5
Voltage/Frequency:	AC: 180-240V, 50/60Hz	Beam Angle:	30°
Luminous Flux:	1200lm	Base:	E27
LED Type:	SMD	Body Type:	Plastic Coated Aluminum
Commercial Type :	PAR38	IP Rating:	IP65
CRI:	> 80	Dimension:	Ø120 x 133mm




Green



Red



Blue




PAR 38 - E27

15W VT-1125

4418 Green
4419 Red
4420 Blue

EAN Code

3800157606301
3800157606318
3800157606325



EQ. Watts:	100W	PF:	> 0.5
Voltage/Frequency:	AC: 180-240V, 50/60Hz	Beam Angle:	30°
Luminous Flux:	1200lm	Base:	E27
LED Type:	SMD	Body Type:	Plastic Coated Aluminum
Commercial Type :	PAR38	IP Rating:	IP65
CRI:	> 80	Dimension:	Ø120 x 133mm





Garden Spike Single Head

VT-728 EAN Code
7044 3800157606332




Type:	Outdoor	Compatible:	PAR 38
Suitable:	VT-1125 Bulb	Color:	Black
Holder:	E27	IP Rating:	IP44
Material:	ABS	Dimension:	470 x 85 x 85mm




Garden Spike Double Head

VT-729 EAN Code
7045 3800157606349



Type:	Outdoor	Compatible:	PAR 38
Suitable:	VT-1125 Bulb	Color:	Black
Holder:	E27	IP Rating:	IP44
Material:	ABS	Dimension:	335 x 210 x 80mm

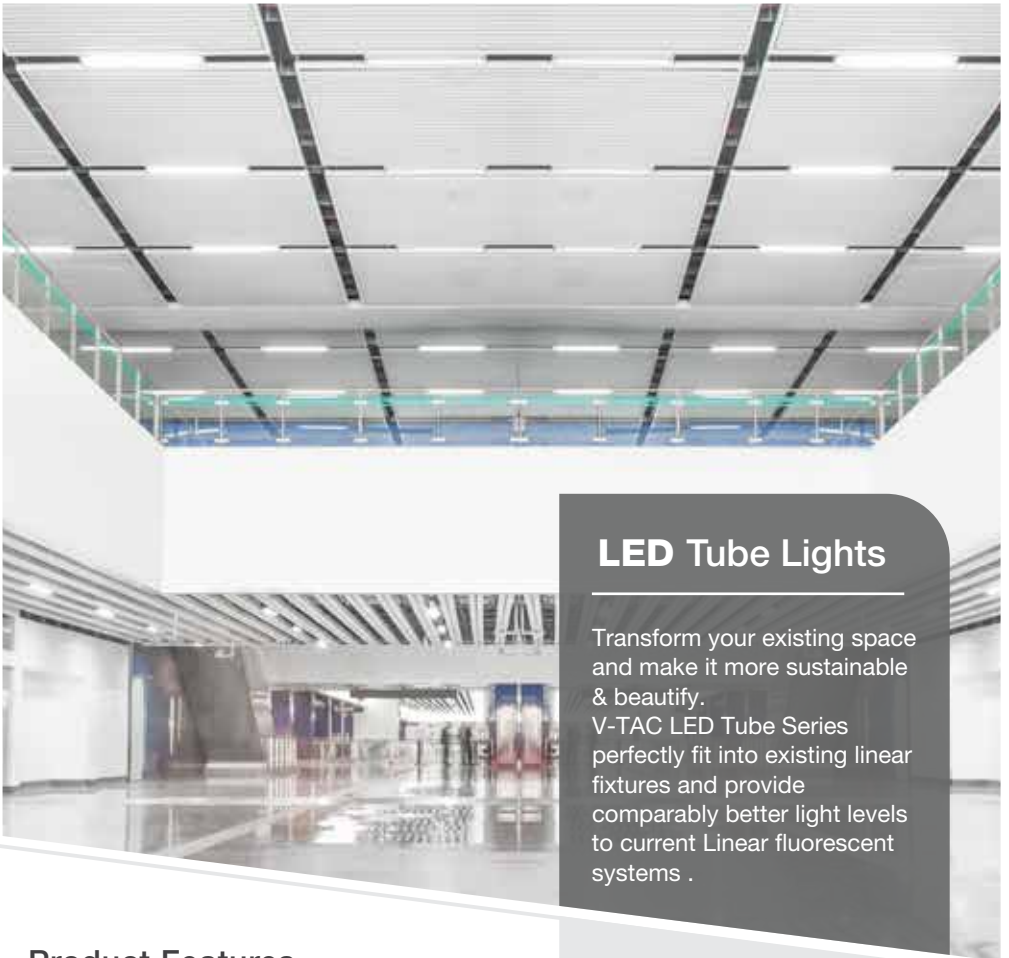

LED Tube Lights

Transform your existing space and make it more sustainable & beautify.

V-TAC LED Tube Series perfectly fit into existing linear fixtures and provide comparably better light levels to current Linear fluorescent systems .

Product Features

- Cost effective, safe retrofit for T8 Tubes
- Perfectly matches with the traditional daylight tube fixture
- Easy Installation
- No Lead or Mercury content hence Environment friendly
- No Ultraviolet or Infrared rays
- Non - flickering
- Long Lifespan, Low maintenance and energy saving
- Available in 60 cm, 120 cm, 150 cm & 180 cm
- Ballast or Starter NOT REQUIRED – DIRECT AC POWER



Applications

Widely used for Domestic and Commercial Lighting, Offices, Supermarkets, Shops, Hotels & similar environment



T8 - Nano Plastic

10W VT-6072

6229 3000K Warmwhite
6230 4500K Daywhite
6231 6400K White


EAN Code

3800157605212
3800157605229
3800157605236

A+



EQ. Watts:	18W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°D	On/Off:	>15000
Luminous Flux:	800lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 600mm	Gross weight:	125 g
CRI:	>80	Instant start :	0-100% in <1s		



Dummy Starter
Included



T8 - Nano Plastic

14W VT-9077


6272 4000k Day White
6262 6400K White

EAN Code

3800157615419
3800157612128

A+

EQ. Watts:	25W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1200lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 900mm	Gross weight:	145.6 g
CRI:	>80	Instant start :	0-100% in <1s		



Dummy Starter
Included



T8 - Nano Plastic

18W VT-1277


EAN Code

6263 3000k Warm White
6273 4000k Day White
6264 6400K White

3800157612135
3800157615426
3800157612159



EQ. Watts:	36W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1600lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 1200mm	Gross weight:	200 g
CRI:	>80	Instant start :	0-100% in <1s		



Dummy Starter
Included



T8 - Nano Plastic

22W VT-1577


EAN Code

6265 3000k Warm White
6309 4000k Day White
6310 6400K White

3800157612159
3800157617437
3800157617444



EQ. Watts:	55W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1900lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x1500mm	Gross weight:	283.4 g
CRI:	>80	Instant start :	0-100% in <1s		




Dummy Starter
Included



60CM
10W VT-6085
 6299 3000k Warm White
 6301 4000k Day White
 6302 6400K White

EAN Code
 3800157617345
 3800157617352
 3800157617369




A++ **120⁺⁺** LM/W
 HIGH LUMENS

EQ. Watts:	25W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1200lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 600mm	Gross weight:	125 g
CRI:	>80	Instant start :	0-100% in <1s		



120CM
18W VT-1285
 6303 3000k Warm White
 6304 4000k Day White
 6305 6400K White

EAN Code
 3800157617376
 3800157617383
 3800157617390




A++ **120⁺⁺** LM/W
 HIGH LUMENS

EQ. Watts:	45W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	2300lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 1200mm	Gross weight:	200 g
CRI:	>80	Instant start :	0-100% in <1s		



150CM
22W VT-1585
 6306 3000k Warm White
 6307 4000k Day White
 6308 6400K White

EAN Code
 3800157617406
 3800157617413
 3800157617420



A++ **120⁺⁺** LM/W
 HIGH LUMENS

EQ. Watts:	75W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	3000lm	Body Type:	Nano-Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x1500mm	Gross weight:	283.4 g
CRI:	>80	Instant start :	0-100% in <1s		

LED Nano Plastic Tubes

A revolutionary LED Lighting Solution



A clear nine point advantage over any conventional glass LED tube!



Nano plastic tube has better light transmittance



This product is almost unbreakable



Light emitted is softer



Light emitted is even across the angle and hence diffuses the glare



The luminous efficiency of the light can reach up to 92%



The bending endurance is twice better than the normal polycarbonate lens



The thickness of a Nano plastic tube is just 0.4 to 0.5 mm



This new material has super thermal conductivity



The internal convection holes can release a great amount of heat from the tube light



T8 - Shoplite Nano Plastic

18W VT-6077

6313 4000k Day White
6314 6400k White

EAN Code

3800157618656
3800157618663



120⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	36W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC: 200-240V 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	2500lm	Body Type:	Nano Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	18.5mm x 549mm	Gross weight:	250 g
CRI:	>80	Instant start :	0-100% in <1s		



T8 - Shoplite Nano Plastic

36W VT-12077

6315 4000k Day White
6316 6400k White

EAN Code

3800157618670
3800157618687



120⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	72W	PF:	>0.5	Holder:	G13
Voltage/Frequency:	AC: 200-240V 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	4500lm	Body Type:	Nano Plastic	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	18.5mm x 1149mm	Gross weight:	400 g
CRI:	>80	Instant start :	0-100% in <1s		




T5 - Glass with PET

8W VT-6005

6318 4000k Day White
6319 6500k White

EAN Code

3800157619271
3800157619288



EQ. Watts:	14W	PF:	>0.9	Holder:	G5
Voltage/Frequency:	AC:200-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	800lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	18.5mm x 549mm	Gross weight:	128 g
CRI:	>80	Instant start :	0-100% in <1s		




T5 - Glass with PET

16W VT-1225

6320 4000k Day White
6321 6500k White

EAN Code

3800157619295
3800157619301



EQ. Watts:	28W	PF:	>0.9	Holder:	G5
Voltage/Frequency:	AC:200-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1600lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	18.5mm x 1149mm	Gross weight:	213 g
CRI:	>80	Instant start :	0-100% in <1s		




T8 - Aluminum Body

40W VT-1840

6251 4500K Daywhite
6250 6000K White

EAN Code

3800157607834
3800157607841



EQ. Watts:	80W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:85-265V,50Hz	Beam Angle:	120°	On/Off:	>15000
Luminous Flux:	3600lm	Body Type:	Aluminum+PC	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	28mm x 1800mm	Gross weight:	700g
CRI:	>80	Instant start :	0-100% in <1s		




T8 - Glass Bread Tube

18W VT-1228
SKU 6322



EAN Code
3800157619318



EQ. Watts:	36W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:180-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	990lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	26mm x 1200mm	Gross weight:	380 g
CRI:	>95	Instant start :	0-100% in <1s		




T8 - Glass Meat Tube

18W VT-1228
SKU 6323



EAN Code
3800157619325



EQ. Watts:	36W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:180-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1530lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	26mm x 1200mm	Gross weight:	380 g
CRI:	>95	Instant start :	0-100% in <1s		




T8 - Glass Vegetable


18W VT-1228
SKU 6324



EAN Code
3800157619332



EQ. Watts:	36W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:180-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	990lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	26mm x 1200mm	Gross weight:	380 g
CRI:	>95	Instant start :	0-100% in <1s		



T8 - Glass Seafood Tube




18W VT-1228
SKU 6325

EAN Code
3800157619349



EQ. Watts:	36W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:180-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	1530lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	26mm x 1200mm	Gross weight:	380 g
CRI:	>95	Instant start :	0-100% in <1s		



T8 - Glass Plant Growing Tube



18W VT-1228
SKU 6326

EAN Code
3800157619356



EQ. Watts:	36W	PF:	>0.9	Holder:	G13
Voltage/Frequency:	AC:180-240V, 50/60Hz	Beam Angle:	160°	On/Off:	>15000
Luminous Flux:	860lm	Body Type:	Glass with PET	Life span:	20,000 Hours
LED Type:	SMD	Dimension:	26mm x 1200mm	Gross weight:	380 g
CRI:	>95	Instant start :	0-100% in <1s		




30CM - Prismatic

10W VT-8013

4987 3000K Warmwhite
4988 4500K Daywhite
4989 6000K White

EAN Code

3800157601955
3800157601962
3800157601979



A+

EQ. Watts:	50W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:200-240V,50Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	800lm	Body Type:	Aluminum+Plastic	Gross weight:	260 g
LED Type:	SMD	Dimension:	300 x 75 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




60CM - Prismatic

20W VT-8020

4990 3000K Warmwhite
4991 4500K Daywhite
4992 6000K White

EAN Code

3800157601986
3800157601993
3800157602006



A+

EQ. Watts:	100W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:200-240V,50Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	1600lm	Body Type:	Aluminum+Plastic	Gross weight:	420 g
LED Type:	SMD	Dimension:	600 x 75 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




120CM - Prismatic

40W VT-8040

4993 3000K Warmwhite
4994 4500K Daywhite
4995 6000K White

EAN Code

3800157602013
3800157602020
3800157602037



A+

EQ. Watts:	200W	PF:	>0.9	On/Off:	>15000
Voltage/Frequency:	AC:200-240V,50Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	3200lm	Body Type:	Aluminum+Plastic	Gross weight:	840 g
LED Type:	SMD	Dimension:	1200 x 75 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




150CM - Prismatic

50W VT-8050

6254 4500k Day White
6253 6000k White

EAN Code

3800157609579
3800157609562



EQ. Watts:	250W	PF:	>0.9	On/Off:	>15000
Voltage/Frequency:	AC: 200-240V, 50Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	4000 lm	Body Type:	Aluminum+Plastic	Gross weight:	1000g
LED Type:	SMD	Dimension:	1500 x 75 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




180CM - Prismatic

60W VT-8060


6311 4500k Day White
6312 6000k White

EAN Code

3800157617574
3800157617581



EQ. Watts:	300W	PF:	>0.9	On/Off:	>15000
Voltage/Frequency:	AC: 200-240V, 50Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	4800lm	Body Type:	Aluminum+Plastic	Gross weight:	1200g
LED Type:	SMD	Dimension:	1800 x 75 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		



120CM - Linear Light

36W VT-12042

6202 4500K Daywhite
6203 6000K White


8071 Wire
8072 Joint

EAN Code

3800157604024
3800157604031

A+

EQ. Watts:	80W	PF:	>0.9	On/off:	>15000
Voltage/Frequency:	AC:85-265V/50-60Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	2900lm	Body Type:	IRON+PC	Gross weight:	700 g
LED Type:	SMD	Dimension:	1187 x 54 x36mm		
CRI:	>80	Instant start :	0-100% in <1s		

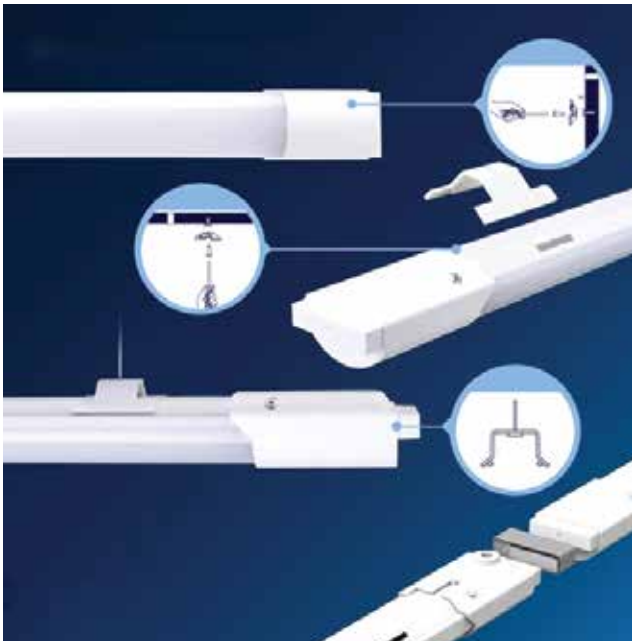



30CM - T5 Tube With Fitting




4W VT-3033

EAN Code

6166 3000K Warmwhite
6167 4500K Daywhite
6168 6000K White

3800230629159
3800230629166
3800230629173



EQ. Watts:	8W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:200~240V, 50/60Hz	Beam Angle:	141°	Life span:	20,000 Hours
Luminous Flux:	330lm	Body Type:	Plastic	Gross weight:	140 g
LED Type:	SMD	Dimension:	305 x 28 x 36mm		
CRI:	>80	Instant start :	0-100% in <1s		



60CM - T5 Tube With Fitting




7W VT-6073

EAN Code

6169 3000K Warmwhite
6170 4500K Daywhite
6171 6000K White

3800230629180
3800230629197
3800230629203



EQ. Watts:	14W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:200~240V, 50/60Hz	Beam Angle:	141°	Life span:	20,000 Hours
Luminous Flux:	630lm	Body Type:	Plastic	Gross weight:	210 g
LED Type:	SMD	Dimension:	605 x 28 x 36mm		
CRI:	>80	Instant start :	0-100% in <1s		



120CM - T5 Tube With Fitting




14W VT-1273

EAN Code

6172 3000K Warmwhite
6173 4500K Daywhite
6174 6000K White

3800230629210
3800230629227
3800230629234



EQ. Watts:	28W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:200~240V, 50/60Hz	Beam Angle:	141°	Life span:	20,000 Hours
Luminous Flux:	1260 lm	Body Type:	Plastic	Gross weight:	300 g
LED Type:	SMD	Dimension:	1230 x 28 x 36mm		
CRI:	>80	Instant start :	0-100% in <1s		




Cabinet Light

10W VT-8112

5068 3000K Warmwhite
5069 4500K Daywhite
5070 6000K White

EAN Code

3800157606714
3800157606721
3800157606738



EQ. Watts:	50W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	110°	Life span:	20,000 Hours
Luminous Flux:	800lm	Body Type:	Aluminum Body, Plastic Diffuser	Gross weight:	600 g
LED Type:	SMD	Dimension:	579 x 78 x 35mm		
CRI:	>80	Instant start :	0-100% in <1s		




Wall Fitting

10W VT-8111

5071 3000K Warmwhite
5072 4500K Daywhite
5073 6000K White

EAN Code

3800157606745
3800157606752
3800157606769



EQ. Watts:	20W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	900lm	Body Type:	Aluminum+PC	Gross weight:	240 g
LED Type:	SMD	Dimension:	600 x 32 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




Wall Fitting

20W VT-8121

5074 3000K Warmwhite
5075 4500K Daywhite
5076 6000K White

EAN Code

3800157606776
3800157606783
3800157606790



EQ. Watts:	40W	PF:	> 0.5	On/Off:	>15000
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	1800lm	Body Type:	Aluminum+PC	Gross weight:	370 g
LED Type:	SMD	Dimension:	1200x 32 x 25mm		
CRI:	>80	Instant start :	0-100% in <1s		




MODEL No.	VT-16010	VT-12020	VT-15020	VT-18011
SKU Code	6052	6054	6056	6151
Body Type	Aluminum	Aluminum	Aluminum	Aluminum
IP Rating	IP20	IP20	IP20	IP20
Size	600mm	1200mm	1500mm	1800mm
EAN Code	3800230624642	3800230624666	3800230624680	3800230627926



MODEL No.	VT-16011	VT-12021	VT-15021
SKU Code	6053	6055	6057
Body Type	Aluminum	Aluminum	Aluminum
IP Rating	IP20	IP20	IP20
Size	600mm x 2	1200mm x 2	1500mm x 2
EAN Code	3800230624659	3800230624673	3800230624697

Batten Fixtures for our T8 LED Tubes so they can be used in a variety of different applications such as public areas like hotels, restaurants or hospitals.

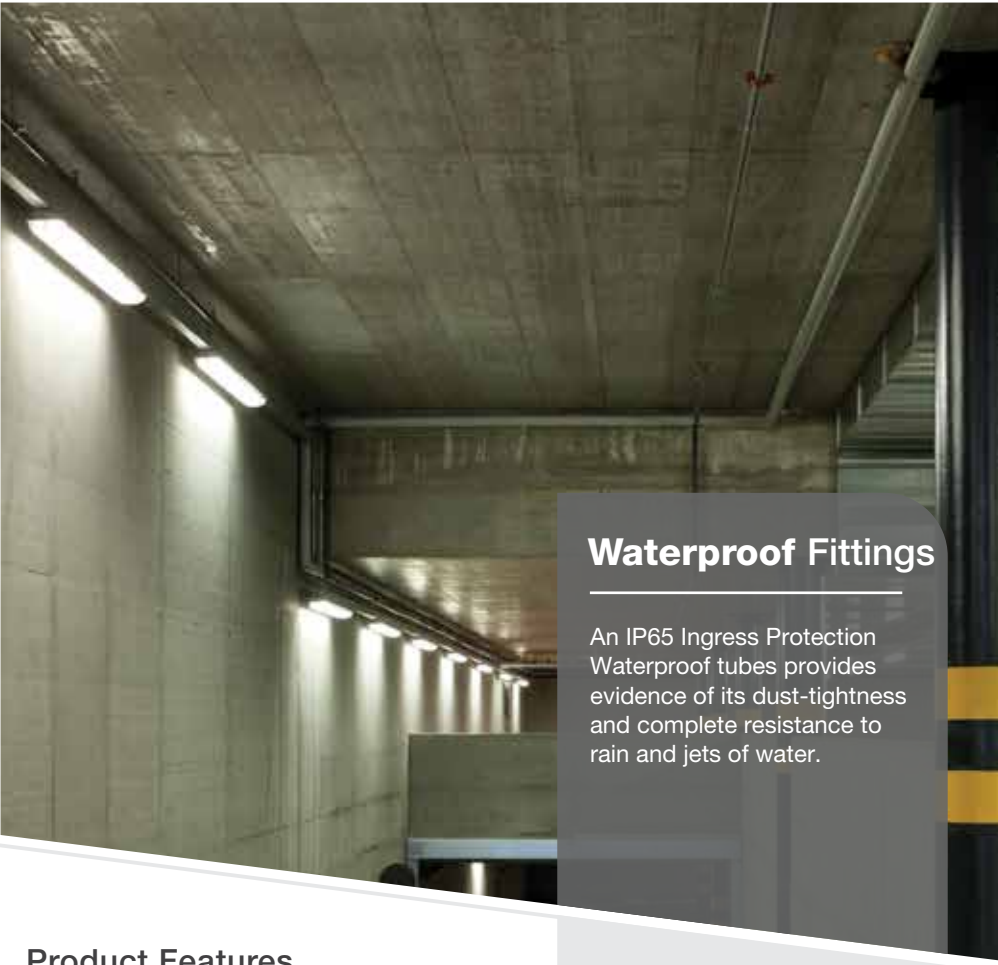

Waterproof Fittings

An IP65 Ingress Protection Waterproof tubes provides evidence of its dust-tightness and complete resistance to rain and jets of water.

Product Features

- Luminous efficacy up to 120lm/W and 80lm/W
- Easy to install
- IP65, free from water and dirt
- Without opening the lampshade for direct wiring
- Perfect replacement for the whole set of T8 fluorescent lighting fixture
- Save up to 80% in electricity consumption compared to fluorescent lighting fixture



Applications

Parking lots, Gas stations, Tunnels, Warehouse etc.



60CM - Fitting


18W VT-6076

6283 4500k Day White
6282 6000k White



EAN Code

3800157616478
3800157616461



EQ. Watts:	100W	PF:	>0.5	On/Off:	>10000
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	1440lm	Body Type:	ABS+PC	Gross weight:	560 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	600 x 86 x 70mm		



120CM - Fitting


36W VT-1249

6285 4500k Day White
6284 6000k White



EAN Code

3800157616492
3800157616485



EQ. Watts:	200W	PF:	>0.9	On/Off:	>10000
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	2880lm	Body Type:	ABS+PC	Gross weight:	916 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	1200 x 86 x 70mm		



150CM - Fitting


48W VT-1574

6287 4500k Day White
6286 6000k White



EAN Code

3800157616515
3800157616508



EQ. Watts:	250W	PF:	>0.9	On/Off:	>10000
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	3840lm	Body Type:	ABS+PC	Gross weight:	1150 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	1500 x 86 x 70mm		



120CM - Fitting

36W VT-1248


6200 4500K Daywhite
6201 6000K White

EAN Code

3800157603270
3800157603287



EQ. Watts:	120W	PF:	>0.9	On/Off:	>10000
Voltage/Frequency:	AC:200-240V,50Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	2800lm	Body Type:	Plastic	Gross weight:	1450 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	1200 x 86 x 72mm		



150CM - Fitting

48W VT-1548

6184 4500K Daywhite
6185 6000K White

EAN Code

3800157602389
3800157602396



EQ. Watts:	90W	PF:	>0.9	On/Off:	>10000
Voltage/Frequency:	AC85-265V/50-60Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	4000lm	Body Type:	Plastic	Gross weight:	1800 g
LED Type:	SMD	Dimension:	IP65		
CRI:	>75	Instant start :	1480 x 86 x 72mm		





120CM - Fitting

60W VT-1260 SMD

6179 4500K Daywhite
6062 6000K White

EAN Code


3800157601610
3800230625212



120⁺⁺
LM/W
HIGH LUMENS



EQ. Watts:	500W	PF:	> 0.9	On/Off:	>10000
Voltage/Frequency:	AC: 200-240V, 50Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	7200lm	Body Type:	Plastic + Aluminium	Gross weight:	2100 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	1200 x 86 x 70mm		



150CM - Fitting

70W VT-1573

6266 4500K Day White
6267 6000k White

EAN Code


3800157612586
3800157612593



120⁺⁺
LM/W
HIGH LUMENS



EQ. Watts:	600W	PF:	> 0.9	On/Off:	>10000
Voltage/Frequency:	AC:200-240V, 50/60Hz	Beam Angle:	120°	Life span:	20,000 Hours
Luminous Flux:	8400lm	Body Type:	Plastic + Aluminium	Gross weight:	2750 g
LED Type:	SMD	IP Rating:	IP65		
CRI:	>70	Dimension:	1500x 86 x70mm		





LED Panels

Uniform radiance coupled with consistent illumination and zero hot or cold spots, just pure systematic radiance with the V-TAC LED Light Panels. Practical, Economical and friendly

Product Features

- Ultra Slim Design
- Contemporary & Elegant Design
- Higher Light Transmission Rate
- Exterior shell, cannot be easily damaged
- No infrared, does not attract flies
- Easy to install
- No Lead or Mercury content hence Environment friendly
- Dimmable options available in selected models

Applications

- Office Lighting (Conference Room, Hospitals, Hotels, Shopping Malls, Showroom and lobby cabin etc.) Kitchen and Domestic Lighting



120⁺⁺
LM/W
HIGH LUMENS

IP65
RATED



60 x 60 LED Panel


40W VT-6140

6331 4000K Day White
6330 6400k White

EAN Code

3800157620093
3800157620086

A⁺⁺



EQ. Watts:	180W	PF:	> 0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	4960lm	Body Type:	Aluminum+PS
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x14mm



60 x 60 LED Panel

45W VT-6060


60286 3000K Warmwhite
60246 4500K Daywhite
60256 6000K White

EAN Code

3800230624482
3800230623652
3800230623584

6
Pack

A



EQ. Watts:	150W	PF:	> 0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x14mm

Drivers for Panels (EMC Approved)

SKU:	6019	6029	}	Compatible with	Compatible with
Type:	Dimmable	Tridonic		60286 / 62206	6222
Power:	45W	45W		60246 / 6218 6	6217
EAN Code:	3800157604017	N/A		60256 / 62196	6221



60 x 60 LED Panel




45W VT-6068

EAN Code

62206 3000K Warmwhite
62186 4500K Daywhite
62196 6000K White

3800157619516
3800157609265
3800157609272



EQ. Watts:	150W	PF:	> 0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x14mm



62 x 62 LED Panel




45W VT-6069

EAN Code

6222 3000K Warmwhite
6217 4500K Daywhite
6221 6000K White

3800157604918
3800157604857
3800157604901



EQ. Watts:	150W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	620 x 620 x14mm

Drivers for Panels (EMC Approved)

SKU:	6019	6029	}	Compatible with	Compatible with
Type:	Dimmable	Tridonic		60286 / 62206	6222
Power:	45W	45W		60246 / 6218 6	6217
EAN Code:	3800157604017	N/A		60256 / 62196	6221




60 x 60 LED Panel

29W VT-6129

120⁺⁺
LM/W
HIGH LUMENS

EAN Code

62406 / 6240 3000K Warmwhite 3800157619608 / 3800157608169
62416 / 6241 4500K Daywhite 3800157609289 / 3800157608176
62426 / 6242 6000K White 3800157609296 / 3800157608183



EQ. Watts:	150W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PC
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x13mm




60 x 60 LED Panel

45W VT-6145

120⁺⁺
LM/W
HIGH LUMENS

EAN Code

62366 / 6236 4500K Daywhite 3800157615723 / 3800157607612
62376 / 6237 6000K White 3800157615730 / 3800157607629



EQ. Watts:	250W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	5400lm	Body Type:	Aluminum+PMMA+PC
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x13mm

Drivers for Panels (EMC Approved)

SKU:	6268	6269
Type:	Dimmable	Dimmable
Power:	29W	45W
EAN Code:	3800157614412	3800157614429



60 x 60 LED Panel


36W VT-6136

6238 4500K Daywhite
6239 6000K White

120⁺⁺
LM/W
HIGH LUMENS

EAN Code

3800157607636
3800157607643



EQ. Watts:	180W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	4320lm	Body Type:	Aluminum+PMMA+PC
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	595 x 595 x13mm




62 x 62 LED Panel

36W VT-6137

62436 / 6243 4500K Daywhite 3800157619622 / 3800157608190

120⁺⁺
LM/W
HIGH LUMENS

EAN Code



EQ. Watts:	180W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	4320lm	Body Type:	Aluminum+PMMA+PC
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	620 x 620 x13mm

Drivers for Panels (EMC Approved)

SKU: 6019
Type: Dimmable
Power: 45W
EAN Code:



30 x 120 LED Panel

29W VT-12031


EAN Code



- 6256 3000k Warmwhite
- 6257 4500k Daywhite
- 6258 6000k White

- 3800157610414
- 3800157610421
- 3800157610438

120⁺⁺lm/w
HIGH LUMENS



EQ. Watts:	250W	PF:	>0.9
Voltage/Frequency:	AC:200-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	3400lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Rectangle
CRI:	>80	Dimension:	1195 x 295 x14mm



30 x 120 LED Panel

45W VT-12045


EAN Code



- 6332 4500K Day White
- 6333 6000k White

- 3800157620321
- 3800157620338

120⁺⁺lm/w
HIGH LUMENS



EQ. Watts:	400W	PF:	>0.9
Voltage/Frequency:	AC:200-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	5400lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Rectangle
CRI:	>80	Dimension:	1195 x 295 x14mm

Drivers for Panels (EMC Approved)

SKU:	6019	6029
Type:	Dimmable	Tridonic
Power:	45W	45W
EAN Code:	3800157604017	N/A




30 x 120 LED Panel



45W VT-12030

EAN Code

60696 / 6069 3000K Warmwhite 3800157609326 / 3800230628466
60266 / 6026 4500K Daywhite 3800157609302 / 3800230623638
60276 / 6027 6000K White 3800157609319 / 3800230623621



EQ. Watts:	150W	PF:	> 0.9
Voltage/Frequency:	AC:200-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Rectangle
CRI:	>80	Dimension:	1195 x 295 x14mm




30 x 120 LED Panel



45W VT-12032

EAN Code


6329 4500k Daywhite 3800157619615



EQ. Watts:	150W	PF:	> 0.9
Voltage/Frequency:	AC:200-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	3600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Rectangle
CRI:	>80	Dimension:	1195 x 295 x14mm

Drivers for Panels (EMC Approved)

SKU:	6019	6029
Type:	Dimmable	Tridonic
Power:	45W	45W
EAN Code:	3800157604017	N/A

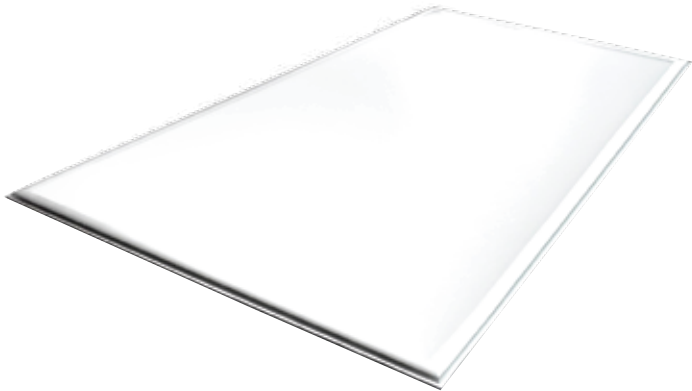


60 x 120 LED Panel

72W VT-12060

6051 4000K Daywhite
6050 6000K White

EAN Code

3800230624543
3800230624536



EQ. Watts:	210W	PF:	> 0.9
Voltage/Frequency:	AC: 170-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	5700lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD 2835	Shape:	Rectangle
CRI:	>80	Dimension:	1195 x 595 x14mm




Drivers for Panels (EMC Approved)

SKU: 6088
Type: EMC Approved -Dimmable
Power: 72W
EAN Code: 3800157602334



DALI
Constant Current Dimming Driver

Model No:	VT-24030	VT-24045	VT-24050
SKU Code:	3110	3106	3107
Voltage:	AC:220V	20-39V -1050mp	N/A
Watts:	Max 30	40W/45W	<10W
EAN Code:	3800157622103	3800157606868	3800157606844





DALI
Touch Panel Controller

Model No:	VT-24049	VT-24048
SKU Code:	3108	3109
Watts:	0.1W	4W
EAN Code:	3800157606851	



DALI
Bus Power Supply



Driver for LED Panels

120⁺⁺
LM/W
HIGH LUMENS



45W

SKU Code:

6270

Type:

Non-Dimmable

Voltage:

200-240V

Watts:

45W

EAN Code:

3800157614436



29W



6271

Non-Dimmable

200-240V

29W

3800157614443

Drivers for LED Panels



SKU Code

6268

Type

Dimmable

Voltage

200-240V

Watts

29W

EAN Code

3800157614412

6269

Dimmable

200-240V

45W

3800157614429

6328

Dimmable

200-240V

70W

3800157619592



120⁺⁺
LM/W
HIGH LUMENS



120⁺⁺
LM/W
HIGH LUMENS





LED Surface Panel

36W VT-6050

EAN Code

6091 3000K Warmwhite

3800157604048


6092 4500K Daywhite

3800157604055

6093 6000K White

3800157604062

A



EQ. Watts:	110W	PF:	>0.9
Voltage/Frequency:	AC:100-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	2880lm	Body Type:	Die Cast Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø500mm x 40mm



LED Surface Panel

48W VT-6148

EAN Code


6261 3000K Warmwhite

3800157612111

6260 6000K White

3800157612104

A+



EQ. Watts:	300W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	110°
Luminous Flux:	3850lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø615 x 45mm

In order to make the slim panels more compatible, V-TAC has developed accessories so that the products can be installed in different types of option. This allows all our panels to be installed in three different types as required by the clients. They are :

- Recessed type
- Suspended mounted
- Surface mounted

Below are the accessories which support in making this type of installation possible:



Hanging Wires Fittings Kit for Suspended Panels

PRODUCT SKU : 6018

EAN CODE: 3800230623669

Adjustable height from 0.3 to 1m

This product can be used for all sizes of panels , that is

- 300 x 300
- 600 x 600
- 1200 x 300
- 1200 x 600

Case for External mounting for panels



Mounting for 1200x 600

Product SKU: 9989



Mounting for 620 x 620

Product SKU: 9997

Case for External mounting for panels



Mounting for 300 x 300

Product SKU: [9970](#)
EAN Code: 3800230623690



Mounting for 600 x 600

Product SKU : [9967](#)
EAN Code: 3800230623676



Mounting for 1205 x 310x156mm

Product SKU : [9969](#)
EAN Code: 3800230623683



Extension Frame for 625 x 625

Product SKU : [9968](#)
EAN Code: 3800230623706




Mounting for 600 x 600

Product SKU : 6327

EAN Code: 3800157619424


Installation Instruction for the Surface Mounted fixture of led Panel light

Here shows two installation methods, it should be installed differently according to your brought installation accessories.

Ceiling Mounted Type


1

1. Install and fix the 3 pieces of Aluminum profile into together in screws




2

2. Install the fixed fixture with 3 sides on the ceiling



3

3. place the led panel into the fixture.



5


4. Install the last L shape Aluminum profile to the fixed fixtures with 3 sides

6

5. turn on the power and light the luminaire, finish the installation

Emergency Pack SLIM & SLEEK

3Hr LED emergency lighting kit, designed to suit a wide range of LED types and circuits. The models have sealed Ni-Cd batteries able to guarantee high efficiency with high temperatures. The LED emergency lighting kit can be use for LED panel lighting, LED downlighting and Ceiling lamp, thus allowing any lighting spot to be qualified for emergency in a simple and quick way, where needed..

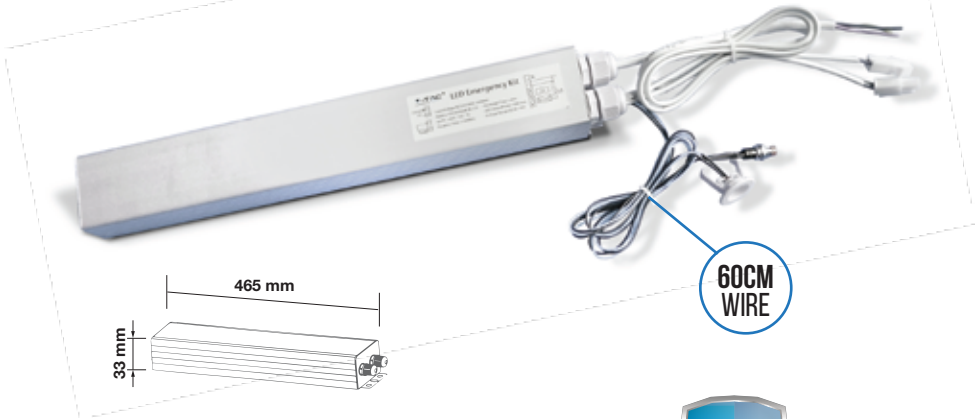

VT-518

SKU Code 60303

Suitable for 45W LED Panels


EAN Code

3800157617451



Voltage:	AC:220-240V,50/60Hz	Battery:	NI-CD, 7,12V, 4000 mAh
Led output power:	10W Max	Color of Fixture:	Aluminum+PMMA+PS
Panel output power:	45W	Body Type:	Square
Charging time:	≤ 36 hours	Size:	465 x52 x 33mm
Working time:	3 hours	Emergency switch on time:	<1 Second

Wire diagram:

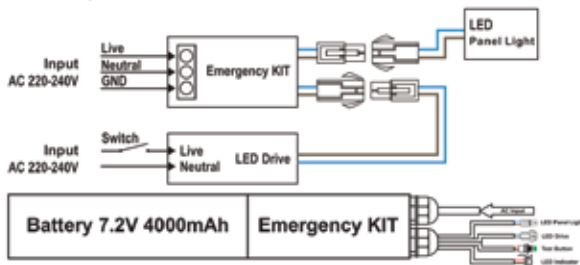




LED Panel

20W VT-3032

- 6214 3000K WarmWhite
- 6215 4500K DayWhite
- 6216 6000K White

EAN Code
3800157604826
3800157604833
3800157604840



EQ. Watts:	80W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	1600lm	Body Type:	Aluminum+PMMA+PS
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	295 x 295 x14mm



LED Panel

6W VT-609

EAN Code

4875 3000K Warmwhite

3800157601801


4876 4500K Daywhite

3800157601818

4877 6000K White

3800157601825

A



EQ. Watts:	24W	Beam Angle:	120°
Voltage/Frequency:	DC:30-42V,50Hz	Body Type:	Plastic + Aluminium Heat Sink
Luminous Flux:	400lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø120mm x 25mm
CRI:	>80	Cutting Size:	Ø105mm
PF:	>0.5		



LED Panel

12W VT-1209

EAN Code

4878 3000K Warmwhite

3800157601832


4879 4500K Daywhite

3800157601849

4880 6000K White

3800157601856

A



EQ. Watts:	48W	Beam Angle:	120°
Voltage/Frequency:	DC:30-42V,50Hz	Body Type:	Plastic + Aluminium Heat Sink
Luminous Flux:	900lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø170mm x 25mm
CRI:	>80	Cutting Size:	Ø155mm
PF:	>0.7		

Available with Surface Fitting

6W	SKU	12W	SKU
VT-609	9921	VT-1209	9921






LED Panel

18W VT-1809

EAN Code

4881 3000K Warmwhite
4882 4500K Daywhite
4883 6000K White

3800157601863
3800157601870
3800157601887



EQ. Watts:	72W	Beam Angle:	120°
Voltage/Frequency:	DC:30-42V,50Hz	Body Type:	Plastic + Aluminium Heat Sink
Luminous Flux:	1350lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø225mm x 25mm
CRI:	>80	Cutting Size:	Ø205mm
PF:	>0.7		




LED Panel

24W VT-2409

EAN Code

4884 3000K Warmwhite
4885 4500K Daywhite
4886 6000K White

3800157601894
3800157601900
3800157601917



EQ. Watts:	100W	Beam Angle:	120°
Voltage/Frequency:	DC:30-42V,50Hz	Body Type:	Plastic + Aluminium Heat Sink
Luminous Flux:	1600lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø300mm x 25m
CRI:	>80	Cutting Size:	Ø285mm
PF:	>0.7		

Available with Surface Fitting

18W SKU
VT-1809 9923

24W SKU
VT-2409 9924






LED Panel

3W VT-307 RD

6292 3000k Warm White
6293 4000k Day White
6294 6000k White

EAN Code

3800157616751
 3800157616768
 3800157616775



EQ. Watts:	25W	Beam Angle:	120°
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	210lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø84mm x 12mm
CRI:	>80	Cutting Size:	Ø73mm
PF:	> 0.5		


LED Panel

6W VT-607 RD

4854 / 48549 3000K Warmwhite
4855 / 48559 4500K Daywhite
4856 / 48569 6000K White

EAN Code

3800230629753
 3800230629760
 3800230629777



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	420lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø120mm x 25mm
CRI:	>80	Cutting Size:	Ø105mm
PF:	> 0.5		


LED Panel

12W VT-1207 RD

4857 / 48579 3000K Warmwhite
4858 / 48589 4500K Daywhite
4859 / 48599 6000K White

EAN Code

3800230629784
 3800230629791
 3800230629807



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø170mm x 25mm
CRI:	>80	Cutting Size:	Ø155mm
PF:	> 0.6		



LED Panel


18W VT-1807 RD

EAN Code

4860 / 48609 3000K Warmwhite
4861 / 48619 4500K Daywhite
4862 / 48629 6000K White

3800230629814
3800230629821
3800230629838

A



EQ. Watts:	110W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1500lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø225mm x 25mm
CRI:	>80	Cutting Size:	Ø205mm
PF:	> 0.6		



LED Panel


24W VT-2407 RD

EAN Code

4872 / 48729 3000K Warmwhite
4873 / 48739 4500K Daywhite
4874 / 48749 6000K White

3800157601559
3800157601566
3800157601573

A



EQ. Watts:	145W	Beam Angle:	120°
Voltage/Frequency:	AC:200-240V,50Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	2000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø300mm x 25mm
CRI:	>80	Cutting Size:	Ø285mm
PF:	>0.9		




LED Panel

3W VT-307 SQ

6295 3000k Warm White
6296 4500k Day White
6297 6000k White

EAN Code

3800157616782
3800157616799
3800157616805



EQ. Watts:	25W	Beam Angle:	120°
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	210lm	Shape:	Square
LED Type:	SMD	Dimension:	84 x 84 x 12mm
CRI:	>80	Cutting Size:	73 x 73mm
PF:	> 0.5		




LED Panel

6W VT-607 SQ

4863 / 48639 3000K Warmwhite
4864 / 48649 4500K Daywhite
4865 / 48659 6000K White

EAN Code

3800230629845
3800230629852
3800230629869



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	420lm	Shape:	Square
LED Type:	SMD	Dimension:	120 x120 x 25mm
CRI:	>80	Cutting Size:	105mm x105mm
PF:	> 0.5		




LED Panel

12W VT-1207 SQ

4866 / 48669 3000K Warmwhite
4867 / 48679 4500K Daywhite
4868 / 48689 6000K White

EAN Code

3800230629876
3800230629883
3800230629890



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1000lm	Shape:	Square
LED Type:	SMD	Dimension:	170 x170 x 25mm
CRI:	>80	Cutting Size:	155mm x155mm
PF:	> 0.6		



LED Panel


18W VT-1807 SQ

EAN Code


4869 / 48699 3000K Warmwhite
4870 / 48709 4500K Daywhite
4871 / 48719 6000K White

3800230629906
3800230629913
3800230629920

A



EQ. Watts:	110W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1500lm	Shape:	Square
LED Type:	SMD	Dimension:	225 x 225 x 25mm
CRI:	>80	Cutting Size:	205mm x205mm
PF:	> 0.6		



LED Panel


24W VT-2407 SQ

EAN Code

4887 / 48879 3000K Warmwhite
4888 / 48889 4500K Daywhite
4889 / 48899 6000K White

3800157602198
3800157602204
3800157602211

A



EQ. Watts:	145W	Beam Angle:	120°
Voltage/Frequency:	AC:200-240V,50Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	2000lm	Shape:	Square
LED Type:	SMD	Dimension:	300 x300 x 25mm
CRI:	>80	Cutting Size:	285mm x285mm
PF:	>0.9		

Dimmable Drivers
for Premium Panels



SKU Code:	8073	8074	8075
Watts:	6W	12W	18W
Description:	LED Driver Dimmable	LED Driver Dimmable	LED Driver Dimmable
EAN Code:	3800157605823	3800157605830	3800157605847
Size:	110x42xH26mm	110x42xH26mm	110x42xH26mm

Compatible with

48549 /48559 /48569/ 48639 /48649/ 48659

Compatible with

48579 /48589 /48599/ 48669 /48679/
48689

Compatible with

48609 /48619 /48629/ 48699 /48709/
48719




SKU Code:	8076	8070
Watts:	24W	18w +24W
Description:	LED Driver Dimmable	LED Driver Dimmable
EAN Code:	3800157605946	3800157616836
Size:	132x45xH26mm	132x45xH26mm

Compatible with

48729 /48739 /48749/ 48879 /48889/ 48899

Compatible with

4860 /4861 /4862 /4872 /4873 /4874
4869 /4870 /4871 /4887 /4888 /4889



LED Panel

8W VT-800 RD

4823 3000K Warmwhite
4822 4500K Daywhite
4821 6000K White


EAN Code

3800230622594
3800230624963
3800230622587

A++

100⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	24W	Beam Angle:	120°
Voltage/Frequency:	AC:110-265V, 50/60Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	800lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø145mm x 20mm
CRI:	>80	Cutting Size:	Ø125mm
PF:	>0.9		



LED Panel

8W VT-800 SQ

4820 3000K Warmwhite
4819 4500K Daywhite
4818 6000K White

EAN Code

3800230622570
3800230624970
3800230622563


A++

100⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	24W	Beam Angle:	120°
Voltage/Frequency:	AC:110-265V, 50/60Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	800lm	Shape:	Square
LED Type:	SMD	Dimension:	120 x120 x 20mm
CRI:	>80	Cutting Size:	105 x105mm
PF:	>0.9		

Drivers for Panels (EMC Approved)

SKU:	8036	8058
Type:	Non-dimmable	Dimmable
Power:	8W	8W
EAN Code:	3800230625519	3800230625540



LED Panel

15W VT-1500 RD

EAN Code


4829 3000K Warmwhite
4828 4500K Daywhite
4827 6000K White

3800230622631
3800230624987
3800230622624

A++

100⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	45W	Beam Angle:	120°
Voltage/Frequency:	AC:110-265V, 50/60Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	1500lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø180mm x 20mm
CRI:	>80	Cutting Size:	Ø160mm
PF:	>0.9		



LED Panel

15W VT-1500 SQ

EAN Code

4826 3000K Warmwhite
4825 4500K Daywhite
4824 6000K White

3800230622617
3800230624994
3800230622600


A++

100⁺⁺
LM/W
HIGH LUMENS

EQ. Watts:	45W	Beam Angle:	120°
Voltage/Frequency:	AC:110-265V, 50/60Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	1500lm	Shape:	Square
LED Type:	SMD	Dimension:	160 x160 x 20mm
CRI:	>80	Cutting Size:	140 x140mm
PF:	>0.9		

Drivers for Panels (EMC Approved)

SKU:	8037	8059
Type:	Non-dimmable	Dimmable
Power:	15W	15W
EAN Code:	3800230625526	3800230625557



LED Panel

22W VT-2200 RD


4835 3000K Warmwhite
4834 4500K Daywhite
4833 6000K White

EAN Code

3800230622679
3800230625007
3800230622662



EQ. Watts:	70W	Beam Angle:	120°
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Body Type:	Aluminum (PKW)
Luminous Flux:	2200lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø240mm x 20mm
CRI:	> 80	Cutting Size:	Ø220mm
PF:	> 0.9		



LED Panel

22W VT-2200 SQ


4854 / 48549 3000K Warmwhite
4855 / 48559 4500K Daywhit

EAN Code

3800230622655
3800230625014
3800230622648



EQ. Watts:	70W	Beam Angle:	120°
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	2200lm	Shape:	Square
LED Type:	SMD	Dimension:	220 x220 x 20mm
CRI:	>80	Cutting Size:	195 x195mm
PF:	> 0.9		



LED Panel

28W VT-2800 RD

4848 3000K Warmwhite
4849 4500K Daywhite
4850 6000K White

EAN Code

3800230627711
3800230627728
3800230627735



EQ. Watts:	84W	Beam Angle:	120°
Voltage/Frequency:	AC: 170-240V,50Hz	Body Type:	Aluminum(PKW)
Luminous Flux:	2800lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø260mm x 20mm
CRI:	>80	Cutting Size:	Ø220mm
PF:	> 0.9		

Drivers for Panels (EMC Approved)

SKU:	8038	8060
Type:	Non-Dimmable	Dimmable Driver
Power:	22W	22W
EAN Code:	3800230625533	3800230625564




LED Panel

8W VT-888 RD

EAN Code

4931 3000K WarmWhite
4932 4500K DayWhite
4933 6000K White

3800157606479
3800157606486
3800157606493



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	800lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø100mm x 27mm
CRI:	>80	Cutting Size:	Ø90mm
PF:	>0.9		




LED Panel

15W VT-1515 RD

EAN Code

4934 3000K WarmWhite
4935 4500K DayWhite
4936 6000K White

3800157606509
3800157606516
3800157606523



EQ. Watts:	100W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	1500lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø145mm x 27mm
CRI:	>80	Cutting Size:	Ø135mm
PF:	>0.9		

Trimless
6.5mm



LED Panel


22W VT-2222 RD

EAN Code

4937 3000K WarmWhite
4938 4500K DayWhite
4939 6000K White

3800157606530
3800157606547
3800157606554

A+



EQ. Watts:	120W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	2200lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø170mm x 27mm
CRI:	>80	Cutting Size:	Ø160mm
PF:	>0.9		

Trimless
6.5mm



LED Panel


29W VT-2929 RD

EAN Code

4940 3000K WarmWhite
4941 4500K DayWhite
4942 6000K White

3800157606561
3800157606578
3800157606585

A+



EQ. Watts:	200W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	2800lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø200mm x 27mm
CRI:	>80	Cutting Size:	Ø185mm
PF:	>0.9		




LED Panel

8W VT-888 SQ

EAN Code

4943 3000K WarmWhite
4944 4500K DayWhite
4945 6000K White

3800157606592
3800157606608
3800157606615



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	800lm	Shape:	Square
LED Type:	SMD	Dimension:	95 x 95x 27mm
CRI:	>80	Cutting Size:	85mm x 85mm
PF:	>0.9		




LED Panel

15W VT-1515 SQ

EAN Code

4946 3000K WarmWhite
4947 4500K DayWhite
4948 6000K White

3800157606622
3800157606639
3800157606646



EQ. Watts:	100W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	1500lm	Shape:	Square
LED Type:	SMD	Dimension:	145 x145 x 27mm
CRI:	>80	Cutting Size:	135mm x 135mm
PF:	>0.9		




LED Panel

22W VT-2222 SQ

EAN Code

4949 3000K WarmWhite
4797 4500K DayWhite
4798 6000K White

3800157606653
3800157606660
3800157606677



EQ. Watts:	120W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	2200lm	Shape:	Square
LED Type:	SMD	Dimension:	170 x170 x 27mm
CRI:	>80	Cutting Size:	160mm x 160mm
PF:	>0.9		




LED Panel

29W VT-2929 SQ

EAN Code

4952 3000K WarmWhite
4953 4500K DayWhite
4954 6000K White

3800157606684
3800157606691
3800157606707



EQ. Watts:	200W	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Body Type:	Die Cast Aluminum
Luminous Flux:	2800lm	Shape:	Square
LED Type:	SMD	Dimension:	200 x 200 x 27mm
CRI:	>80	Cutting Size:	185mm x 185mm
PF:	>0.9		




Round Chrome

6W VT-607CH

6334 3000k Warm White
6335 4000K Day White
6336 6400k White

EAN Code

3800157621182
3800157621199
3800157621205



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	420lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø120mm x 25mm
CRI:	>80	Cutting Size:	Ø105mm
PF:	> 0.5		




Round Chrome

12W VT-1207CH

6340 3000k Warm White
6341 4000K Day White
6342 6400k White

EAN Code

3800157621243
3800157621250
3800157621267



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø170mm x 25mm
CRI:	>80	Cutting Size:	Ø155mm
PF:	> 0.6		



Round Chrome


18W VT-1807CH

6346 3000k Warm White
6347 4000K Day White
6348 6400k White

EAN Code

3800157621304
3800157621311
3800157621328

A



EQ. Watts:	110W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1500lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø225mm x 25mm
CRI:	>80	Cutting Size:	Ø205mm
PF:	> 0.6		



Round Chrome


24W VT-2407CH

6352 3000k Warm White
6353 4000K Day White
6354 6400k White

EAN Code

3800157621366
3800157621373
3800157621380

A



EQ. Watts:	145W	Beam Angle:	120°
Voltage/Frequency:	AC:200-240V,50Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	2000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø300mm x 25mm
CRI:	>80	Cutting Size:	Ø285mm
PF:	>0.9		




Round-Satin Nickel

6W VT-607SN

- 6337 3000k Warm White
- 6338 4000K Day White
- 6339 6400k White

EAN Code

- 3800157621212
- 3800157621229
- 3800157621236



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	420lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø120mm x 25mm
CRI:	>80	Cutting Size:	Ø105mm
PF:	> 0.5		




Round-Satin Nickel

12W VT-1207SN

- 6343 3000k Warm White
- 6344 4000K Day White
- 6345 6400k White

EAN Code

- 3800157621274
- 3800157621281
- 3800157621298



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø170mm x 25mm
CRI:	>80	Cutting Size:	Ø155mm
PF:	> 0.6		




Round-Satin Nickel

18W VT-1807SN

6349 3000k Warm White
6350 4000K Day White
6351 6400k White

EAN Code

3800157621335
3800157621342
3800157621359



EQ. Watts:	110W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	1500lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø225mm x 25mm
CRI:	>80	Cutting Size:	Ø205mm
PF:	> 0.6		




Round-Satin Nickel

24W VT-2407SN

6355 3000k Warm White
6356 4000K Day White
6357 6400k White

EAN Code

3800157621397
3800157621403
3800157621410



EQ. Watts:	145W	Beam Angle:	120°
Voltage/Frequency:	AC:200-240V,50Hz	Body Type:	Aluminum+PMMA+PS
Luminous Flux:	2000lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø300mm x 25mm
CRI:	>80	Cutting Size:	Ø285mm
PF:	>0.7		




Round Chrome

6W VT-605CH

6358 3000k Warm White
6359 4000K Day White
6360 6400k White

EAN Code

3800157621427
3800157621434
3800157621441



EQ. Watts:	35W	PF:	>0.5
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø90mm x 24mm




Round Chrome

12W VT-1205CH

6364 3000k Warm White
6365 4000K Day White
6366 6400k White

EAN Code

3800157621489
3800157621496
3800157621502



EQ. Watts:	60W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1000lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø140mm x 24mm




Round Chrome

18W VT-1805CH

6370 3000k Warm White
6371 4000K Day White
6372 6400k White

EAN Code

3800230629876
3800230629883
3800230629890



EQ. Watts:	75W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø190mm x 24mm




Round-Satin Nickel

6W VT-605SN

6361 3000k Warm White
6362 4000K Day White
6363 6400k White

EAN Code

3800157621458
3800157621465
3800157621472



EQ. Watts:	35W	PF:	>0.5
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø90mm x 24mm




Round-Satin Nickel

12W VT-1205SN

6367 3000k Warm White
6368 4000K Day White
6369 6400k White

EAN Code

3800157621519
3800157621526
3800157621533



EQ. Watts:	60W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1000lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø140mm x 24mm




Round-Satin Nickel

18W VT-1805SN


6373 3000k Warm White
6374 4000K Day White
6375 6400k White

EAN Code

3800157621571
3800157621588
3800157621595



EQ. Watts:	75W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø190mm x 24mm



LED SurfacePanel

6W VT-605 RD


4904 3000K WarmWhite
4905 4500K DayWhite
4906 6000K White

EAN Code

3800157605380
 3800157605397
 3800157605403



EQ. Watts:	35W	PF:	>0.5
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø90mm x 24mm



LED SurfacePanel

12W VT-1205 RD


4910 3000K WarmWhite
4911 4500K DayWhite
4912 6000K White

EAN Code

3800157605441
 3800157605458
 3800157605465



EQ. Watts:	60W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	900lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø140mm x 24mm



LED SurfacePanel

18W VT-1805 RD


4916 3000K WarmWhite
4917 4500K DayWhite
4918 6000K White

EAN Code

3800157605502
 3800157605519
 3800157605526



EQ. Watts:	75W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1440lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø190mm x 24mm



LED SurfacePanel

6W VT-605 SQ


4907 3000K WarmWhite
4908 4500K DayWhite
4909 6000K White

EAN Code

3800157605410
3800157605427
3800157605434



EQ. Watts:	35W	PF:	>0.5
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	90 x 90 x 24mm



LED SurfacePanel

12W VT-1205 SQ


4913 3000K WarmWhite
4914 4500K DayWhite
4915 6000K White

EAN Code

3800157605472
3800157605489
3800157605496



EQ. Watts:	60W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	900lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	140 x 140 x 24mm



LED SurfacePanel

18W VT-1805 SQ

4919 3000K WarmWhite
4920 4500K DayWhite
4921 6000K White

EAN Code

3800157605533
3800157605540
3800157605557



EQ. Watts:	75W	PF:	>0.6
Voltage/Frequency:	AC:85-265V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1440lm	Body Type:	Aluminum
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	190 x 190 x 24mm



100⁺⁺
LM/W
HIGH LUMENS

Surface

LED Panel


8W VT-1408 RD

4805 3000K Warmwhite
4804 4500K Daywhite
4803 6000K White

EAN Code

3800230622730
3800230622723
3800230622716

A⁺⁺



EQ. Watts:	24W	PF:	> 0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	800lm	Body Type:	Aluminum(PKW)
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø115mm x 35mm



100⁺⁺
LM/W
HIGH LUMENS

Surface

LED Panel


15W VT-1415 RD

4811 3000K Warmwhite
4810 4500K Daywhite
4809 6000K White

EAN Code

3800230622792
3800230622785
3800230622778

A⁺⁺



EQ. Watts:	45W	PF:	>0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	Aluminum(PKW)
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø175mm x 35mm



100⁺⁺
LM/W
HIGH LUMENS

Surface

LED Panel


22W VT-1422 RD

4817 3000K Warmwhite
4816 4500K Daywhite
4815 6000K White

EAN Code

3800230622853
3800230622846
3800230622839

A⁺⁺



EQ. Watts:	66W	PF:	> 0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	2200lm	Body Type:	Aluminum (PKW)
LED Type:	SMD 5630	Shape:	Round
CRI:	> 80	Dimension:	Ø235mm x 35mm



100⁺⁺
LM/W
HIGH LUMENS

Surface


LED Panel

8W VT-1408 SQ

4802 3000K Warmwhite
4801 4500K Daywhite
4800 6000K White

EAN Code

3800230622709
3800230622693
3800230622686



EQ. Watts:	24W	PF:	> 0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	800lm	Body Type:	Aluminum(PKW)
LED Type:	SMD 5630	Shape:	Square
CRI:	>80	Dimension:	115 x 115 x 35mm



100⁺⁺
LM/W
HIGH LUMENS

Surface


LED Panel

15W VT-1415 SQ

4808 3000K Warmwhite
4807 4500K Daywhite
4806 6000K White

EAN Code

3800230622761
3800230622754
3800230622747



EQ. Watts:	45W	PF:	> 0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	Aluminum(PKW)
LED Type:	SMD 5630	Shape:	Square
CRI:	>80	Dimension:	175 x 175 x 35mm



100⁺⁺
LM/W
HIGH LUMENS

Surface


LED Panel

22W VT-1422 SQ

4814 3000K Warmwhite
4813 4500K Daywhite
4812 6000K White

EAN Code

3800230622822
3800230622815
3800230622808



EQ. Watts:	66W	PF:	> 0.9
Voltage/Frequency:	AC: 110-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	2200lm	Body Type:	Aluminum (PKW)
LED Type:	SMD 5630	Shape:	Square
CRI:	> 80	Dimension:	235 x 235 x 35mm

**LED Panel****8W** VT-809 SQ

4922 3000K WarmWhite

4923 4500K DayWhite


4924 6000K White

EAN Code

3800157605564

3800157605571

3800157605588



Twin LED

Surface
Mounted

EQ. Watts:	24W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	800lm	Body Type:	PKW
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	150 x 150 x 40mm

**LED Panel****15W** VT-1509 SQ

4925 3000K WarmWhite

4926 4500K DayWhite


4927 6000K White

EAN Code

3800157605595

3800157605601

3800157605618



Twin LED

Surface
Mounted

EQ. Watts:	45W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	PKW
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	200 x 200 x 40mm

**LED Panel****22W** VT-2209 SQ

4928 3000K WarmWhite

4929 4500K DayWhite


4930 6000K White

EAN Code

3800157605625

3800157605632

3800157605649



Twin LED

Surface
Mounted

EQ. Watts:	66W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	2200lm	Body Type:	PKW
LED Type:	SMD	Shape:	Square
CRI:	>80	Dimension:	240 x 240 x 40mm




LED Panel

8W VT-809

4890 3000K Warmwhite
4891 4500K Daywhite
4892 6000K White

EAN Code

3800157602594
3800157602600
3800157602617



EQ. Watts:	24W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	800lm	Body Type:	PKW
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø150mm x 40mm




LED Panel

15W VT-1509

4893 3000K Warmwhite
4894 4500K Daywhite
4895 6000K White

EAN Code

3800157602624
3800157602631
3800157602648



EQ. Watts:	45W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	1500lm	Body Type:	PKW
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø200mm x 40mm




LED Panel

22W VT-2209

4896 3000K Warmwhite
4897 4500K Daywhite
4898 6000K White

EAN Code

3800157602655
3800157602662
3800157602679



EQ. Watts:	66W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	2200lm	Body Type:	PKW
LED Type:	SMD	Shape:	Round
CRI:	>80	Dimension:	Ø240mm x 40mm




LED Panel

6W VT-602G RD

4740 3000K Warmwhite
6277 4500K Daywhite
4739 6000K White

EAN Code

3800230622891
3800157615754
3800230622884



EQ. Watts:	45W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	420lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø100mm x40mm
CRI:	>80	Cutting Size:	Ø75mm
PF:	>0.5		




LED Panel

12W VT-1202G RD

4744 3000K Warmwhite
6279 4500K Daywhite
4743 6000K White

EAN Code

3800230622938
3800157615778
3800230622921



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	840lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø160mm x40mm
CRI:	>80	Cutting Size:	Ø120mm
PF:	> 0.5		




LED Panel

18W VT-1881G RD

4760 3000K Warmwhite
6281 4500K Daywhite
4759 6000K White

EAN Code

3800230622976
3800157615792
3800230622969



EQ. Watts:	95W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	1260lm	Shape:	Round
LED Type:	SMD	Dimension:	Ø198mm x40mm
CRI:	>80	Cutting Size:	Ø145mm
PF:	> 0.5		




LED Panel

6W VT-602G SQ

4738 3000K Warmwhite
6276 4500K Daywhite
4737 6000K White

EAN Code

3800230622877
 3800157615761
 3800230622860



EQ. Watts:	45W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	420lm	Shape:	Round
LED Type:	SMD	Dimension:	100 x 100 x 40mm
CRI:	>80	Cutting Size:	75mm x 75mm
PF:	>0.5		




LED Panel

12W VT-1202G SQ

4742 3000K Warmwhite
6278 4500K Daywhite
4741 6000K White

EAN Code

3800230622914
 3800157615761
 3800230622907



EQ. Watts:	75W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	840lm	Shape:	Round
LED Type:	SMD	Dimension:	160 x 160 x 40mm
CRI:	>80	Cutting Size:	120mm x 120mm
PF:	> 0.5		




LED Panel

18W VT-1881G SQ


4746 3000K Warmwhite
6280 4500K Daywhite
4745 6000K White

EAN Code

3800230622952
 3800157615785
 3800230622945



EQ. Watts:	95W	Beam Angle:	120°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Glass+Aluminum
Luminous Flux:	1260lm	Shape:	Round
LED Type:	SMD	Dimension:	198x 198 x 40mm
CRI:	>80	Cutting Size:	145mm x 145mm
PF:	> 0.5		

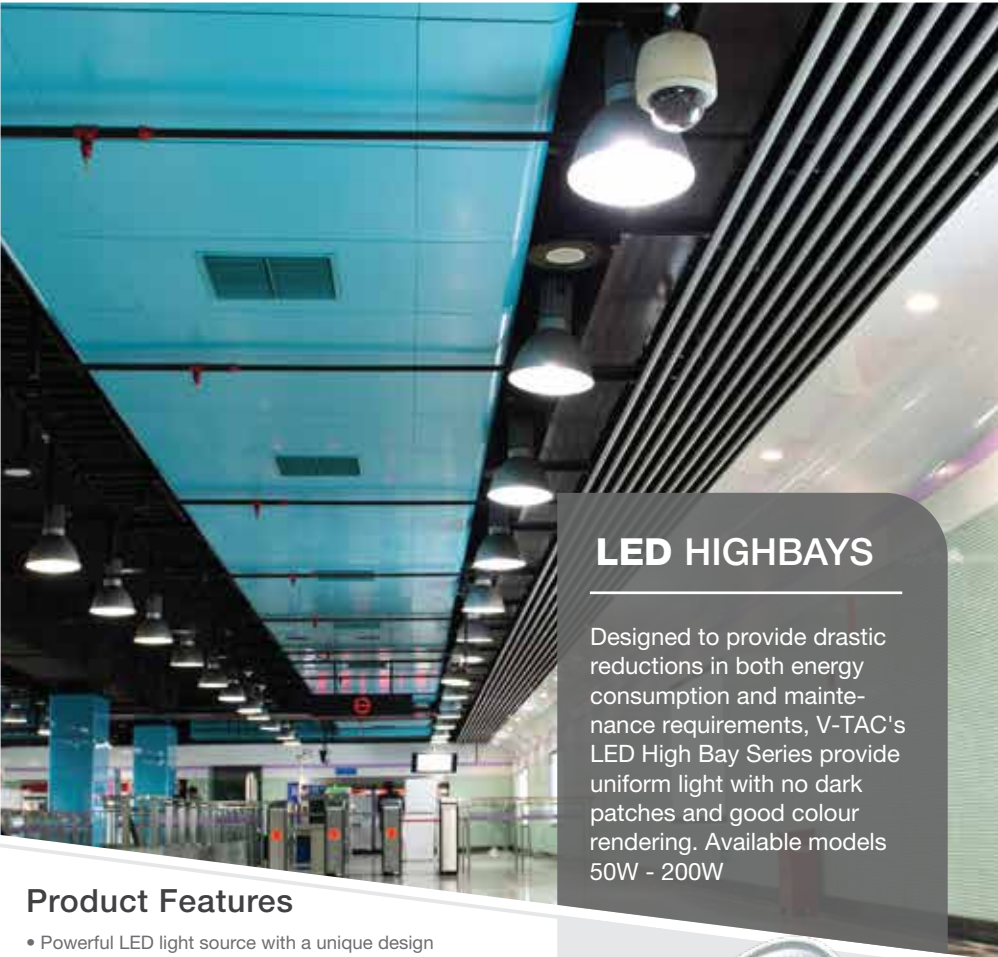

LED Highbays

Designed to provide drastic reductions in both energy consumption and maintenance requirements, V-TAC's LED High Bay Series provide uniform light with no dark patches and good colour rendering. Available models 50W - 200W

Product Features

- Powerful LED light source with a unique design
- Extensive Options can replace all types of Standard MH High bays
- Aluminium Diffuser with multiple Beam Angle's to choose from 45°D / 90°D / 120°D
- Shatter Proof Perspex Lens
- High Thermal Conductivity, Low Luminous Decay, Pure Colours & No Heavy Shade
- The unique design of Radiator fuses with the Lamp Box perfectly hence diffuses the heat conduction efficiently which reduces the temperature of inside lamp & ensures the LED long life span
- Non - Flickering
- No UV Radiation

Applications

- Perfect fit for Industrial Usage, Warehouse & Super Markets, Workshop's, Factories, Warehouse's, Highway, toll Stations, Gas Stations, Malls, Exhibition Halls, Stadium's & other vast areas





120⁺⁺
LM/W
HIGH LUMENS

UFO Highbay
With Mean Well Driver

100W VT-9120

5550 4500K Day White
5551 6400k White

120°
BEAM ANGLE


IP65
RATED




EAN Code

3800157619714
3800157619721

A++



Luminous Intensity Distribution Curve



EQ. Watts:	800W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	12000lm	Body Type:	Diecast Aluminum
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	ø280 x 162 mm



120⁺⁺
LM/W
HIGH LUMENS

UFO Highbay
With Mean Well Driver

150W VT-9170

5552 4500K Day White
5553 6400k White

120°
BEAM ANGLE


IP65
RATED




EAN Code

3800157619738
3800157619745

A++



Luminous Intensity Distribution Curve



EQ. Watts:	1200W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	18000lm	Body Type:	Diecast Aluminum
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	ø360 x 168 mm



120⁺⁺
LM/W
HIGH LUMENS

120°
BEAM ANGLE

IP65
RATED

UFO Highbay


100W VT-9111

5543 4500K Daywhite
5544 6000K White


EAN Code

3800157610476
3800157610483

A++



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	900W	PF:	>0.9
Voltage/Frequency:	AC: 100-265V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	12000lm	Body Type:	Aluminum
LED Type:	SMD	IP Rating:	IP65
CRI:	> 70	Dimension:	Ø320mm x 149mm



120⁺⁺
LM/W
HIGH LUMENS

120°
BEAM ANGLE

IP65
RATED

UFO Highbay


150W VT-9166

5545 6000K White


EAN Code

3800157610490

A++



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts	1500W	PF	>0.9
Voltage/Frequency	AC: 100-277V, 50/60Hz	Beam Angle	120°
Luminous Flux	21750lm	Body Type	Aluminum
LED Type	SMD	IP Rating	IP65
CRI	>70	Dimension	Ø320mm x 149mm



120⁺⁺
LM/W
HIGH LUMENS

LED HIGHBAY

50W VT-9052

5540 4500K Daywhite
5539 6000K White

120°
BEAM ANGLE



60°
BEAM ANGLE

IP44
RATED

EAN Code

3800157608831
3800157608824

A⁺⁺



EQ. Watts:	300W	PF:	> 0.9
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	60°/120°
Luminous Flux:	6200lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP44
CRI:	>70	Dimension:	60°:348x 346mm 120°:445x 308mm



120⁺⁺
LM/W
HIGH LUMENS

LED HIGHBAY

70W VT-9073

5535 4500K Daywhite
5536 6000K White

120°
BEAM ANGLE



60°
BEAM ANGLE

IP44
RATED

EAN Code

3800157608824
3800157608831

A⁺⁺



EQ. Watts:	630W	PF:	> 0.9
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	60°/120°
Luminous Flux:	8680lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP44
CRI:	>70	Dimension:	60°:348x 346mm 120°:445x 308mm



120⁺⁺
LM/W
HIGH LUMENS


LED Highbay

100W VT-9104
5534 4500K Daywhite
5532 6000K White

120°
BEAM ANGLE

60°
BEAM ANGLE

IP44
RATED




EAN Code

3800157608725
3800157607780

A++

Luminous Intensity Distribution Curve



EQ. Watts:	900W	PF:	> 0.9
Voltage/Frequency:	AC: 100-265V, 50/60Hz	Beam Angle:	90°/120°
Luminous Flux:	12000lm	Body Type:	Aluminum
LED Type:	SMD	IP Rating:	IP44
CRI:	> 70	Dimension:	90°:428x 345mm 120°:535x 306mm



120⁺⁺
LM/W
HIGH LUMENS


LED Highbay

150W VT-9155
5537 4500K Daywhite
5538 6000K White

120°
BEAM ANGLE

60°
BEAM ANGLE

IP44
RATED




EAN Code

3800157608848
3800157608855

A++

Luminous Intensity Distribution Curve



EQ. Watts:	1350W	PF:	>0.9
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle	90°/120°
Luminous Flux:	18600lm	Body Type	Aluminum Diecasting
LED Type:	SMD	IP Rating	IP44
CRI:	>70	Dimension	90°:428 x 345mm 120°:535 x 306mm



IP44
RATED

UFO Highbay


50W VT-9053

5554 4500K Day White
5555 6400k White

EAN Code

3800157620895
3800157620901

A+



EQ. Watts:	250w	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	4000lm	Body Type:	Diecast Aluminum
LED Type:	SMD	IP Rating:	IP44
CRI:	>70	Dimension:	ø221x 85 mm



IP44
RATED

UFO Highbay


100W VT-9106

5546 4500K Day White
5547 6400k White

EAN Code

3800157619677
3800157619684

A+



EQ. Watts:	500W	PF:	>70
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	120°
Luminous Flux:	8000lm	Body Type:	Diecast Aluminum
LED Type:	SMD	IP Rating:	IP44
CRI:	>70	Dimension:	ø280 x 91 mm



IP44
RATED

UFO Highbay


150W VT-9156

5548 4500K Day White
5549 6400k White

EAN Code

3800157619691
3800157619707

A+



EQ. Watts:	800W	PF	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle	120°
Luminous Flux:	12000lm	Body Type	Diecast Aluminum
LED Type:	SMD	IP Rating	IP44
CRI:	>70	Dimension	ø360 x 98 mm



LED LOWBAY

85W VT-9185

5541 4500K Daywhite
5542 6000K White





EAN Code

3800157610001
3800157610018

- Warehouses, shipping docks, stairwells and parking garages.
- Lightweight, Compact structure
- Indoor and outdoor
- Replacement of 500W CFL

EQ. Watts:	500W	PF:	> 0.9
Voltage/Frequency:	AC: 220-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	6800lm	Body Type:	Aluminum
LED Type:	SMD	IP Rating:	IP20
CRI:	> 80	Dimension:	222mm x 270mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM





LED Street Lights

Light the path to the future with LED Street Lights. This state of the art LED Technology provides uniform Brightness and Illumination. No mercury means they are environmentally friendly

Product Features

- Perfect replacement for traditional lights
- Saves 80% Electricity cost, Better Efficiency, Longer Life Span
- Dedicated IP65 Sealed Optical Cavities
- Optically Optimized Glass Lenses
- Uniformity in Light Distribution – Maximizes Efficiency
- Fully Operational in Extreme Weather up to -20° Celsius
- Low maintenance & Low Power consumption
- Reduced CO² emissions

Applications

- Out Door Applications like Streets, Projects, Cross Roads, Tunnels, Car Parks, Industrial Facilities etc






LED Street Light

30W VT-15135ST
5480 6000K White


120⁺⁺
LM/W
HIGH LUMENS



EAN Code
3800157616164



Luminous Intensity Distribution Curve




LED Street Light

50W VT-15055ST
5485 6000K White


120⁺⁺
LM/W
HIGH LUMENS



EAN Code
3800157619561



Luminous Intensity Distribution Curve



EQ. Watts:	400W
Voltage/Frequency:	AC:85-265V, 50/60Hz
Luminous Flux:	6200lm
LED Type:	SMD
CRI:	>70
PF:	>0.9

Beam Angle:	110°
Color of Fixture:	Black/Grey
Body Type:	Aluminum Diecasting
IP Rating:	IP65
Dimension:	477 x 220 x 55mm



LED Street Light


50W VT-15165ST

5482 6000K White


120⁺⁺
LM/W
HIGH LUMENS



EAN Code
3800157616188



Luminous Intensity Distribution Curve



LED Street Light


100W VT-15115ST

5481 6000K White


120⁺⁺
LM/W
HIGH LUMENS



EAN Code
3800157616171



Luminous Intensity Distribution Curve



EQ. Watts:	900W	Beam Angle:	100°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	12400lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	566 x 268 x 62mm
PF:	>0.95		



LED Street Light

30W VT-15131ST


5471 3000K Warmwhite
5472 4500K Daywhite
5473 6000K White

120⁺⁺
LM/W
HIGH LUMENS

A⁺⁺

EAN Code

3800157608732
3800157608749
3800157608756



EQ. Watts:	270W	Beam Angle:	100°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	3720lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	400 x 180 x 55mm
PF:	>0.95		



LED Street Light

50W VT-15151ST


5474 3000K Warmwhite
5475 4500K Daywhite
5476 6000K White

120⁺⁺
LM/W
HIGH LUMENS

A⁺⁺

EAN Code

3800157608763
3800157608770
3800157608787



EQ. Watts:	450W	Beam Angle:	100°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	6200lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	477 x 216 x 55mm
PF:	>0.95		



LED Street Light

100W VT-15105ST


5477 4500K Daywhite
5478 6000K White

120⁺⁺
LM/W
HIGH LUMENS

A⁺⁺

EAN Code

3800157608794
3800157608800



EQ. Watts:	900W	Beam Angle:	100°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	12400lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	566 x 268 x 62mm
PF:	>0.95		




LED Street Light


100W VT-15104 ST
5468 6000K White

120⁺⁺ LM/W
HIGH LUMENS

EAN Code
3800157607797



Luminous Intensity Distribution Curve



EQ. Watts:	900W	Beam Angle:	100°
Voltage/Frequency:	AC:85-265V,50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	12000lm	Body Type:	Die Cast Aluminum
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	703 x 297 x 70mm
PF:	>0.95	PoleSize:	Ø60mm




LED Street Light


120W VT-15121ST
5479 6000K White

120⁺⁺ LM/W
HIGH LUMENS

EAN Code
3800157608817



Luminous Intensity Distribution Curve



EQ. Watts:	1080W	Beam Angle:	100°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black/Grey
Luminous Flux:	14880lm	Body Type:	Aluminum Diecasting
LED Type:	SMD	IP Rating:	IP65
CRI:	>70	Dimension:	566 x 268 x 62mm
PF:	>0.95	PoleSize:	Ø60mm

LED Street Light

Adapter

VT-795


EAN Code

3624

3800157608152

Color: **Dark grey**

Body: **Diecast Aluminium**



Total length= 325mm

Lower part inner = Ø65mm


Outer = Ø85mm.

Length of lower part = 215mm

Length of upper part = 185mm.



Compatible with all our street light models, this adapter allows the angle of the streetlight to be adjusted as per client's requirements





LED Strip Lights

Add an extensive array of lights and colors to any setting or interior, rejuvenate and transform the ambience of any environment at the flick of a switch with V-TAC's LED Strip Light Series. Easy installation with minimal space requirement makes this the right choice for Restaurants, Auditoriums and Meeting Rooms etc.

Product Features

- LED strip is a low Voltage flexible Ribbon available in DC:12V
- Flexible & easy installation
- Exceptionally low power consumption
- Multiple visual effects in unending colours and shades
- Available in DC:12V and 220V with different color range from Warm White to RGB
- Available in IP20 and IP65 rating
- Available in 8mm or 10mm width
- Available in 1 or 1.5 meter rigid bar options with different options of Aluminium Profiles



Applications

- Ideal for illuminating Borders, Edges, Cabinets, Bars and any area with limited space for installation.



3000lm/m
HIGH LUMENS

CRI >80

240
LED/M

IP20
RATED

5M ROLL



2835-NON WP | 240 LED/M

A++

18W 2835-NON WP

EAN Code

2164 3000K Warmwhite
2165 4500K Daywhite
2166 6000K White

3800157610117
3800157610124
3800157610131

LED Type:	2835	lm/M:	3000lm
Watt/M:	18W	lm/LED:	20-22 lm
Current/M:	1.5A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty:	240	Width:	10mm



CRI >80

204
LED/M

IP20
RATED

5M ROLL



2835-NON WP | 204 LED/M

A+

18W 2835-NON WP

EAN Code

2461 3000K Warmwhite
2462 4500K Daywhite
2463 6000K White

3800157612234
3800157612241
3800157612258

LED Type:	2835	lm/M:	1700lm
Watt/M:	18W	lm/LED:	9-11 lm
Current/M:	1.5A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty:	204	Width:	8mm



3000lm/m | CRI >95 | 120 LED/M | IP20 RATED | 5M ROLL

5730-NON WP | 120 LED/M A++

18W 5730-NON WP

- 2162 3000K Warmwhite
- 2163 4500K Daywhite
- 2161 6000K White

EAN Code
3800157610094
3800157610100
3800157610087

LED Type:	5730	lm/M:	3000lm
Watt/M:	18W	lm/LED:	20-22 lm
Current/M:	1.5A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty:	120	Width:	8mm



30 LED/M **A+**
4.8W 5050 - WP

500
lm/M

IP65
RATED



LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	4.8W	White	2144	3800230621399
Current/M:	0.4A	Warm White	2145	3800230621412
Voltage:	DC:12V	Daywhite	2460	3800157612166
LED Qty:	30	Red	2129	3800157619974
lm/LED:	14lm-16lm	RGB	2118	3800230621528
Beam Angle:	120°			
IP Rating:	IP65			
Width:	10mm			



30 LED/M **A+**
4.8W 5050 - NON WP

500
lm/M

IP20
RATED




LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	4.8W	White	2133	3800230621382
Current/M:	4A	Warm White	2135	3800230621405
Voltage:	DC: DC:12V	RGB	2124	3800230621535
LED Qty:	30			
lm/LED:	14lm-16lm			
Beam Angle:	120°			
IP Rating:	IP20			
Width:	10mm			



60 LED/M **A+**
9.6W 5050 - WP



LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	10.8W	White	2148	3800230621498
Current/M:	0.8A	Warm White	2149	3800230621511
Voltage:	DC:12V	Daywhite	2150	3800230621474
LED Qty:	60	Red	2152	3800230624775
lm/LED:	14lm-16lm	Green	2153	3800230621450
Beam Angle:	120°	Blue	2151	3800230621436
IP Rating:	IP65	RGB	2155	3800230621559
Width:	10mm			



60 LED/M **A+**
9.6W 5050 - NON WP



LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	10.8W	White	2126	3800230621481
Current/M:	0.8A	Warm White	2122	3800230621504
Voltage:	DC:12V	Daywhite	2143	3800230621467
LED Qty:	60	Red	2128	3800230624468
lm/LED:	14lm-16lm	Green	2138	3800230621443
Beam Angle:	120°	Blue	2137	3800230621429
IP Rating:	IP20	Yellow	2156	3800230628824
Width:	10mm	RGB	2120	3800230621542



60 LED/M **A+**
3.6W 3528 - WP

400 lm/M **IP65**
RATED



LED Type:	3528	Color:	SKU Code:	EAN Code:
Watt/M:	3.6W	White	2031	3800230621146
Current/M:	0.3A	Warm White	2032	3800230621177
Voltage:	DC:12V	Daywhite	2043	3800230621191
LED Qty:	60	Red	2036	3800230621276
lm/LED:	5lm -6lm	Green	2034	3800230621238
Beam Angle:	120°	Blue	2035	3800230621245
IP Rating:	IP65	Yellow	2033	3800230621207
Width:	8mm			



60 LED/M **A+**
3.6W 3528 - NON WP

400 lm/M **IP20**
RATED



LED Type:	3528	Color:	SKU Code:	EAN Code:
Watt/M:	3.6W	White	2005	3800230621153
Current/M:	0.3A	Warm White	2016	3800230621160
Voltage:	DC:12V	Daywhite	2041	3800230621184
LED Qty:	60	Red	2015	3800230621269
lm/LED:	5lm -6lm	Green	2011	3800230621221
Beam Angle:	120°	Blue	2013	3800230621252
IP Rating:	IP20	Yellow	2009	3800230621214
Width:	8mm			



120 LED/M **A+**
7.2W 3528 - WP

600 lm/M **IP65**
RATED



LED Type:	3528	Color:	SKU Code:	EAN Code:
Watt/M:	7.2W	White	2037	3800230621290
Current/M:	0.6A	Warm White	2038	3800230621313
Voltage:	DC:12V	Daywhite	2044	3800230621337
LED Qty:	120	Red	2039	3800230621375
lm/LED:	5lm -6lm	Blue	2027	3800230621351
Beam Angle:	120°			
IP Rating:	IP65			
Width:	8mm			



120 LED/M **A+**
7.2W 3528 - NON WP

600 lm/M **IP20**
RATED



LED Type:	3528	Color:	SKU Code:	EAN Code:
Watt/M:	7.2W	White	2002	3800230621283
Current/M:	0.6A	Warm White	2025	3800230621306
Voltage:	DC:12V	Daywhite	2042	3800230621320
LED Qty:	120	Red	2030	3800230621368
lm/LED:	5lm -6lm			
Beam Angle:	120°			
IP Rating:	IP20			
Width:	8mm			



204 LED/M **A+**
18W 3014 - NON WP

1700
lm/M



LED Type:	3014	Color:	SKU Code:	EAN Code:
Watt/M:	18W	White	2403	3800230628053
Current/M:	1.5A	Warm White	2404	3800230628060
Voltage:	DC:12V	Daywhite	2405	3800157600309
LED Qty:	204			
lm/LED:	9-11lm			
Beam Angle:	120°			
IP Rating:	IP20			
Width:	10mm			



60 LED/M **A+**
10.8W 5050 - NON WP

900
lm/M



LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	10.8W	RGB	2159(RGB+W)	3800230629623
Current/M:	1.2A			
Voltage:	DC:12V			
LED Qty:	30:30			
lm/LED:	15lm			
Beam Angle:	120°			
IP Rating:	IP20			
Width:	10mmaa			





60 LED/M **A+**
9W 5050 - NON WP


600
LED/M



LED Type:	5050	Color:	SKU Code:	EAN Code:
Watt/M:	9W	White	2430	3800230621566
Current/M:	0.3A	Warm White	2431	3800230621573
Voltage:	DC:24V	Daywhite	2459	3800157612036
LED Qty:	60			
lm/LED:	14lm-16lm			
Beam Angle:	120°			
IP Rating:	IP20			
Width:	10mm			



Model No:	VT-555	VT-555	VT-555
SKU Code:	2512	2513	2514
Color / Temperature:	White	Warmwhite	Daywhite
Lumen lm/M:	320±5%	320±5%	320±5%
FPC Width MM:	7.5	7.5	7.5
Power W/M:	8-10W	8-10W	8-10W
Jacket Dia:	9 x16.5 mm	9 x16.5 mm	9 x16.5 mm
EAN Code:	3800157605656	3800157605663	3800157605670



Model No:	VT-555	VT-555	VT-555
SKU Code:	2515	2516	2517
Color / Temperature:	Blue	RED	Green
Lumen lm/M:	320±5%	320±5%	320±5%
FPC Width MM:	7.5	7.5	7.5
Power W/M:	8-10	8-10	8-10
Jacket Dia:	9 x16.5 mm	9 x16.5 mm	9 x16.5 mm
EAN Code:	3800157605687	3800157605694	3800157605700



Model No:	VT-555	VT-555	VT-555
SKU Code:	2518	2529	2531
Color / Temperature:	Yellow	Pink	Violet
Lumen lm/M:	320±5%	320±5%	320±5%
FPC Width MM:	7.5	7.5	7.5
Power W/M:	8-10	8-10	8-10
Jacket Dia:	9 x16.5 mm	9 x16.5 mm	9 x16.5 mm
EAN Code:	3800157605717	3800157619523	3800157619547



Item:	Profile
SKU Code:	2527
EAN Code:	3800157608404



Item:	Power cord without plug	Pin	End safe cap
SKU Code:	3331	3333	3334
EAN Code:	3800157608268	3800157607889	3800157607896



LED Strip Sets
PLUG AND PLAY

LED STRIP LIGHT set is a complete kit where we provide you with 5 meters of LED STRIP LIGHT ,along with the POWER SUPPLY and CONNECTOR and REMOTE CONTROL (optional) ,to make it a complete kit . Available and made in different colour options as per requirement.






- LED Strip
- Remote control (included)
- Driver (included)
- Packing: Blister Pack, 5 meters roll

SKU Code:	Description:	EAN Code:
2351	LED Strip Set SMD3528 60 LEDs 4500K IP20	3800230621634
2350	LED Strip Set SMD5050 30 LEDs RGB IP20	3800230621641
2352	LED Strip Set SMD5050 30 LEDs RGB IP65	3800230621658
2353	LED Strip Set SMD5050 60 LEDs RGB IP20	3800230621665
2354	LED Strip Set SMD5050 60 LEDs RGB IP65	3800230621672
2355	LED Strip Set SMD5050 60 LEDs White IP20	3800230621689
2356	LED Strip Set SMD5050 60 LEDs White IP65	3800230621696

LED Strip
ACCESSORIES







SKU Code:	Description:	EAN Code:
3500	Flexible Connector - LED Strip 3528	3800230622051
3501	Flexible Connector - LED Strip 5050	3800230622068
3502	Flexible Connector - LED Strip 5050 RGB	3800230622075
3503	Connector - LED Strip 3528	3800230622082
3504	Connector - LED Strip 5050	3800230622099
3505	Connector - LED Strip 5050 RGB	3800230622105
3507	Flexible Connector - LED Strip 3528 DC Female	3800230622112
3508	Flexible Connector - LED Strip 5050 DC Female	N/A
3509	Connector - LED Strip 3528 Cross Type	N/A
3510	Connector - LED Strip 5050 Cross Type	N/A
3511	Connector - LED Strip 5050 L Type	N/A
3512	Connector - LED Strip DC Female	N/A








Aluminum Profiles

Model No:	VT-7101	VT-7101	VT-7102
SKU Code	9981	9982	9983
Dimension:	16.76 x 10.3 x 1000 mm	16.76 x 10.3 x 1000 mm	16.9 x 12.48 x 1000 mm
Color of Fixture:	Transparent	Matt	Transparent
EAN Code:	3800230622129	3800230622136	3800230622143







Aluminum Profiles

Model No:	VT-7102	VT-7103	VT-7104
SKU Code	9984	Transparent: 9985 / Matt : 9986	9987
Dimension:	16.9 x 12.48 x 1000 mm	26.5 x 9 x 1000 mm	19 x 19 x 1000 mm
Color of Fixture:	Matt	Transparent / Matt	Matt
EAN Code:	3800230622150	Transparent : 3800230622167 Matt: 3800230622174	3800230622181



Aluminum Profiles

Model No:	VT-7105	VT-7105	VT-7109
SKU Code	9990	9991	9947
Dimension:	24.6 x 7.85 x 1000 mm	24.6 x 7.85 x 2000 mm	22x17x1000mm
Color of Fixture:	Milky	Milky	Milky
EAN Code:	3800230628077	3800230628794	3800157617208



Aluminum Profiles

Model No:	VT-7106	VT-7107	VT-7108
SKU Code	1000mm:9992 / 2000mm: 9993	9994	9995
Dimension:	17.5 x 7.8 x1000 / 2000 mm	60 x 35.1 x 1000 mm	ø20.54 x 1000 mm
Color of Fixture:	Milky / Milky	Milky	Milky
EAN Code:	1000mm : 3800230628800 2000mm : 3800230628817	3800157601399	3800157601405



Strip Controllers

SKU Code:	3300	3303	3304
Model No:	VT-2402	VT-2404	VT-2401
Description:	Dimmer for LED Strip with Remote Control	Radio Controller with Remote Control 4 Buttons	Infrared Controller with Remote Control 24 Buttons
Max Current /Watt:	8A, 96W	12A, 144W	6A, 72W
Input Voltage:	DC 12/24 V	DC 12/24 V	DC 12/24 V
Size:	115 x 55 x 35 mm	105 x 65 x 20 mm	65 x 35 x 22 mm
EAN Code:	3800230622198	3800230622204	3800230622211



Strip Controllers

SKU Code:	3307	3312	3317
Model No:	VT- DMX 512	VT-2405	VT-2401
Description:	DMX 512 Controller	Radio Controller with Touch Remote Contol	Infrared Controller with Remote Control 44 Buttons
Max Current /Watt:	4A x3, 360W	3A x4, 144W	6A, 72W
Input Voltage:	DC:12V	DC 12/24 V	DC 12/24 V
Size:	165 x 75 x 25 mm	130 x 65 x 25 mm	125 x 56 x 7 mm
EAN Code:	3800230622266	3800230622273	3800230622228



Strip Controllers

SKU Code:	3625	3318	3320
Model No:	VT-2472	N/A	N/A
Description:	Infrared Controller with Remote Control 24 Buttons	Radio Controller with Remote Control	Mini RF Controller
Max Current /Watt:	6A, 72W	500W	N/A
Input Voltage:	DC 12/24 V	DC:12V	DC:12V
Size:	N/A	120 x 75 x 25 mm	N/A
EAN Code:	3800157609920	3800230622235	3800230628022



Strip Controllers

SKU Code:	3319	3321	3663
Model No:	N/A	N/A	VT-2410
Description:	24B Mini Controller	Wi-Fi Single Controller	Wi-Fi Single Controller
Max Current /Watt:	N/A	N/A	6A 216W/432W
Input Voltage:	DC:12V	DC:12V	DC 12/24 V
EAN Code:	3800230628015	3800230628039	3800157619509



Strip Controllers

SKU Code:	3322	3326	3327
Description:	Wi-Fi RGB Controller	5050 60 RGB with LED Controller	RGB+W Amplifier
Input Voltage:	DC:12V	DC:12V	DC:12V
EAN Code:	3800230628046	3800230629630	3800157601047



Strip Controllers

SKU Code:	3328	3009	3018
Description:	360W RF Controller	5050 RGB Strip Amplifier	5050 RGB Strip Mini-Amplifier
Input Voltage:	DC:12V	DC:12V	DC:12V
EAN Code:	3800157601054	3800230622259	3800230622242



Complete range of modules for
SIGNAGE INDUSTRY

Model No:	VT-50503
Watts:	0.72W/PC
Lumens:	66lm/PC
Beam Angle:	160 °
CRI:	75
Voltage/Frequency:	DC:12V
Unit Size:	67 x 15 x 8.5mm
IP Rating:	IP67
Material:	ABS + PCB

SKU Code:	EAN Code:
WHITE: 5116	3800157610209
RED: 5117	3800157610216
BLUE: 5118	3800157610223
BLACK: 5119	3800157610230



Model No:	VT-28353
Watts:	1W/PC
Lumens:	100lm/PC
Beam Angle:	120 °
CRI:	75
Voltage/Frequency:	DC:12V
Unit Size:	53x12x4.6mm
IP Rating:	IP67
Material:	ABS+Aluminum Plate

SKU Code:	EAN Code:
WHITE: 5120	3800157610247
RED: 5121	3800157610254
BLUE: 5122	3800157610261
GREEN: 5123	3800157610278





Model No:	VT-28356
Watts	1.5
Voltage/Frequency	DC 12V
Luminous Flux	120-150lm
LED Type	SMD2835
CRI	75
Beam Angle	120°
Color of Fixture	White
Body Type	ABS+Aluminium
Dimension	87 x 15 x 10mm
IP Rating	IP67

SKU Code:	EAN Code:
WARMWHITE: 5124	3800157621687
WHITE: 5125	3800157621694
RED: 5126	3800157621700
BLUE: 5127	3800157621717
GREEN: 5128	3800157621724



Model No:	VT-28358
Watts	1.44
Voltage/Frequency	DC 12V
Luminous Flux	120-135lm
LED Type	SMD2835
CRI	75
Beam Angle	160°
Color of Fixture	White
Body Type	ABS+Aluminium
Dimension	37x 37 x 6.8mm
IP Rating	IP68

SKU Code:	EAN Code:
WARMWHITE: 5129	3800157621731
WHITE: 5130	3800157621748
RED: 5131	3800157621755
BLUE: 5132	3800157621762
GREEN: 5133	3800157621779




Model No:	VT-50501
Watts	0.24
Voltage/Frequency	DC 12V
Luminous Flux	20-22lm
LED Type	SMD5050
CRI	75
Beam Angle	120°
Body Type	PVC
IP Rating	IP68

SKU Code:	EAN Code:
WARMWHITE: 5135	3800157621793
WHITE: 5136	3800157621809
RED: 5137	3800157621816
YELLOW: 5138	3800157621823
BLUE: 5139	3800157621830
GREEN: 5140	3800157621847



Model No:	VT-50506
Watts	0.72
Voltage/Frequency	DC 12V
Luminous Flux	20-22lm
LED Type	SMD5050
CRI	75
Beam Angle	120°
Body Type	ABS + PCB
Dimension	68 x 19.5 x 5.7mm
IP Rating	IP67

SKU Code:	EAN Code:
RGB: 5134	3800157621786

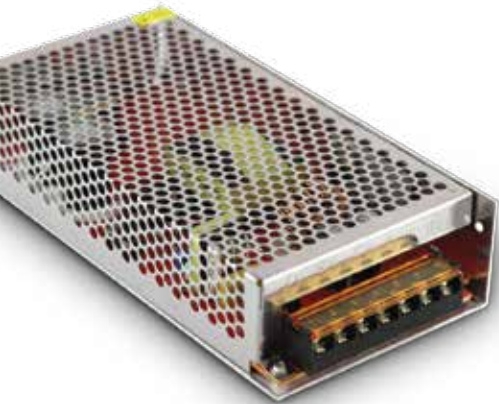

LED Strip Power Supply

METAL DRIVER (SMPS) SERIES

Product Features:

- Switching Metal Power Supply for all types of strip lights, led lighting , led display , etc
- With short circuit protection, over load protection , stable output voltage
- Built in EMI Filter
- High efficiency , low temperature
- 100% load tested
- Protection Rating : IP20
- CE, ROHS, EMC approved

Model:	SKU Code:	Watts	Current Capacity	Output	Unit Size	EAN Code:
VT-20025	3050	25W	2.1A	DC:12V	85x 58 x 34 mm	3800230621726
VT-20040	3058	40W	3.3A	DC:12V	108 x 78 x 35 mm	3800230625731
VT-20045	3051	45W	3.8A	DC:12V	110 x 78 x 35 mm	3800230621733
VT-20060	3052	60W	5A	DC:12V	110 x 78 x 36 mm	3800230621740
VT-20075	3053	75W	6A	DC:12V	160 x 98 x 38 mm	3800230621757
VT-20100	3060	100W	8.3A	DC:12V	199 x 98 x 42 mm	3800230625755
VT-20120	3054	120W	10A	DC:12V	160 x 98 x 42 mm	3800230621764
VT-20150	3055	150W	12.5A	DC:12V	199 x 98 x 42 mm	3800230621771
VT-20200	3061	200W	16.5A	DC:12V	200 x 110 x 50 mm	3800230625762
VT-20250	3056	250W	20A	DC:12V	200 x 110 x 50 mm	3800230621788
VT-20350	3057	350W	30A	DC:12V	215 x 115 x 50 mm	3800230621795
VT-20500	3062	500W	42A	DC:12V	215 x 115 x 50 mm	3800157608411

LED Strip Power Supply

RAINPROOF POWER SUPPLY SERIES

Product Features:

- RAIN PROOF DRIVER for all types of STRIP LIGHTS, LED LIGHTING, LED DISPLAY, etc.
- Industrial specifications and standards.
- With short circuit protection, over load protection and stable output voltage.
- Built in EMI Filter.
- High efficiency and low temperature.
- 100% load tested.
- Protection Rating: IP44
- CE, ROHS and EMC approved.



Model:	SKU Code:	Watts	Current Capacity	Output	Unit Size	EAN Code:
VT-21060	3070	60W	5A	DC:12V	155 x 105 x 50 mm	3800230621801
VT-21080	3069	80W	6.6A	DC:12V	155 x 105 x 50 mm	3800230621818
VT-21120	3071	120W	10A	DC:12V	195 x 115 x 53 mm	3800230621825
VT-21150	3072	150W	12.5A	DC:12V	195 x 115 x 53 mm	3800230621832
VT-21250	3073	250W	20A	DC:12V	233 x 153 x 66 mm	3800230621856
VT-21300	3081	300W	25A	DC:12V	233 x 153 x 66 mm	3800157601542
VT-21400	3074	400W	33A	DC:12V	233 x 153 x 66 mm	3800230621863
VT-21080	3075	80W	3.3A	DC:24V	155 x 105 x 50 mm	3800230621870
VT-21150	3076	150W	6.2A	DC:24V	195 x 115 x 53 mm	3800230621880
VT-21200	3078	200W	8.3A	DC:24V	233 x 153 x 66mm	3800230621849
VT-21400	3077	400W	16.6A	DC:24V	232 x 153 x 65 mm	3800230621894



LED Strip Power Supply
WATERPROOF POWER SUPPLY SERIES

Product Features:

LED STRIP LIGHT set is a complete kit where we provide you with 5 meters of LED STRIP LIGHT, along with the POWER SUPPLY and CONNECTOR and REMOTE CONTROL (optional), to make it a complete kit. Available and made in different colour options as per requirement.

- LED Strip
- Remote control (included)
- Driver (included)
- Packing: Blister Pack, 5 meters roll

Model:	SKU Code:	Watts	Current Capacity	Output	Unit Size	EAN Code:
VT-22030	3100	30W	2.5A	DC:12V	201 x 30.5 x 20 mm	3800230621900
VT-22045	3090	45W	3.75A	DC:12V	250 x 40 x 23 mm	3800230621917
VT-22060	3091	60W	5A	DC:12V	180 x 72 x 45 mm	3800230621924
VT-22100	3092	100W	8.5A	DC:12V	253 x 72 x 45 mm	3800230621931
VT-22120	3093	120W	10A	DC:12V	253 x 72 x 45 mm	3800230621948
VT-22150	3094	150W	12.5A	DC:12V	253 x 72 x 45 mm	3800230621955
VT-22200	3098	200W	16.6A	DC:12V	200 x 120 x 53 mm	3800230625779
VT-22300	3219	300W	25A	DC:12V	201 x 30.5 x 20 mm	3800157604932
VT-22360	3099	360W	30A	DC:12V	256 x 102 x 65 mm	3800230625786
VT-22020	3214	20W	0.83A	DC:24V	201 x 30.5 x 20 mm	3800230621962
VT-22030	3215	30W	1.25A	DC:24V	201 x 30.5 x 20 mm	3800230629562
VT-22045	3095	45W	1.88A	DC:24V	250 x 40 x 23 mm	3800230621979
VT-22101	3101	100W	4.2A	DC:24V	201 x 30.5 x 20 mm	3800157605991
VT-22150	3096	150W	6.25A	DC:24V	253 x 72 x 45 mm	3800230621986
VT-22200	3097	200W	8.3A	DC:24V	231 x 120 x 53 mm	3800230621993



LED STRIP POWER SUPPLY PLASTIC ADAPTOR SERIES

Product Features:

- Plastic DRIVER for all types of STRIP LIGHTS, LED LIGHTING, LED DISPLAY, etc.
- With specifications and Industrial standards.
- With short circuit protection, over load protection and stable output voltage.
- Built in EMI Filter.
- High efficiency and low temperature.
- 100% load tested.
- Protection Rating: IP 20.
- CE, Rosh, EMC approved.
- Options available with BS STANDARD 3 PIN PLUG.

Model:	SKU Code:	Watts	Current Capacity	Output	Voltage / Frequency	EAN Code:
VT-23018	3017	18W	1.5A	DC:12V	AC 110-240V, 50/60Hz	3800230622006
VT-23002 W 1	3030	24W	2A	DC:12V	AC 85-240V, 50/60Hz	3800230625298
VT-23030	3007	30W	2.5A	DC:12V	AC 110-240V, 50/60Hz	3800230622013
VT-23042	3016	42W	3.5A	DC:12V	AC 110-240V, 50/60Hz	3800230622020
VT-23003 W 1	3031	42W	3.5A	DC:12V	AC 85-240V, 50/60Hz	3800230625304
VT-23060	3008	60W	5A	DC:12V	AC 110-240V, 50/60Hz	3800230622037
VT-23005 W 1	3032	60W	5A	DC:12V	AC 85-240V, 50/60Hz	3800230625311
VT-23080	3019	78W	6.5A	DC:12V	AC 110-240V, 50/60Hz	3800230622044



Plastic Adaptor Series (EMC Approved)



Model:	SKU Code:	Watts	Current Capacity	Output	Voltage / Frequency	EAN Code:
VT-23024	3036	24W	2A	DC:12V	AC 110-240V, 50/60Hz	3800157601474
VT-23024 W 1	3038	24W	2A	DC:12V	AC 110-240V, 50/60Hz	3800157601535
VT-23060	3035	60W	5A	DC:12V	AC 110-240V, 50/60Hz	3800157601085
VT-23060 W 1 W	3037	60W	5A	DC:12V	AC 110-240V, 50/60Hz	3800157601528
VT-23078	3034	78W	6.5A	DC:12V	AC 110-240V, 50/60Hz	3800157601078



LED Track Lights

Perfect ecological alternative to Old Halogen Lights, Track lights are the extensive range of modern LED Track Lights! Delivering high performance, excellent durability and emarkable light output to serve the general Commercial and Retail market.

Product Features

- Available from 10W up to 45W
- Saves 80% energy
- No Ultraviolet or Infrared Rays
- Totally flexible, Compact & Adjustable design
- No Lead or Mercury content hence Environment friendly
- Provides Uniform Radiance & Enhances appeal of any environment.
- Enhances measurable levels of performance as compared to older versions of high wattage halogen & HID light sources in retail & Commercial Lighting applications.



Applications

- Perfect choice for Exhibition Stands, Hotels, Bars, Commercial & Residential Lighting.



COB Series

10W VT-4512



EAN Code

1332 3000k Warm White
1333 4000K Day White
1334 6400k White

3800157620604
3800157620611
3800157620628

A+

EQ. Watts:	65W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	800lm	Color of Fixture:	Black + White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80		

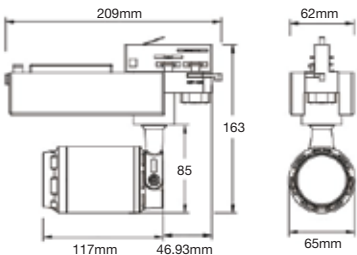

Dimension=mm



COB Series

25W VT-4528



EAN Code



1335 3000k Warm White
1336 4000K Day White
1337 6400k White

3800157620635
3800157620642
3800157620659

A+

EQ. Watts:	150W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	2100lm	Base:	Black + White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80		

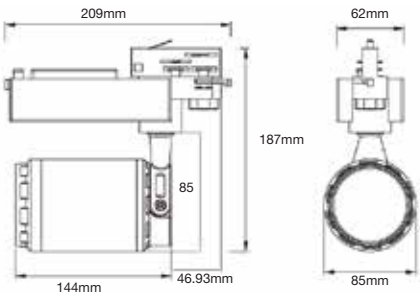

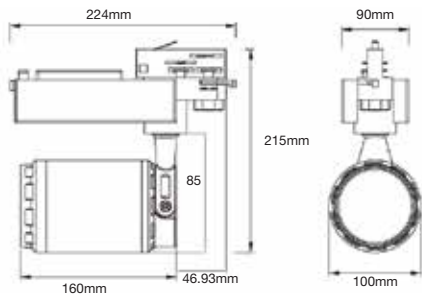

COB Series

35W VT-4537

EAN Code

- 1338 3000k Warm White
- 1339 4000K Day White
- 1340 6400k White

- 3800157620666
- 3800157620673
- 3800157620680



EQ. Watts:	200W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	2850lm	Base:	Black + WHITE
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80		



COB Series

15W VT-4615

1298 3000k Warm White
1299 4000K Day White
1300 6400k White



EAN Code

3800157619851
 3800157619868
 3800157619875

A+



EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	1350lm	Color of Fixture:	White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>95	Dimension:	180 x 97 x 155mm

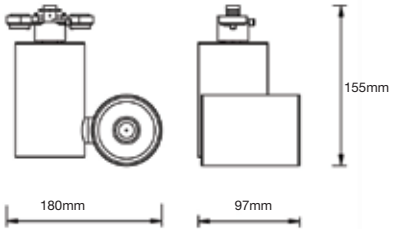

COB Series

15W VT-4615

1301 3000k Warm White
1302 4000K Day White
1303 6400k White



EAN Code

3800157619882
 3800157619899
 3800157619905

A+



EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	1350lm	Base:	Black
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>95	Dimension:	180 x 97 x 155mm

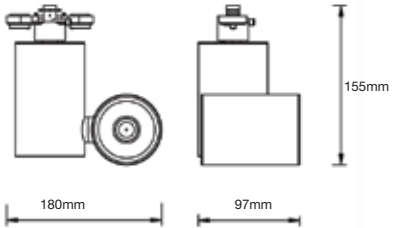



COB Series

30W VT-4635

1292 3000k Warm White

1293 4000K Day White

1294 6400k White

EAN Code

3800157619790



3800157619806

3800157619813

A+



EQ. Watts:	200W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	2700lm	Color of Fixture:	White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>95	Dimension:	180 x 140 x 215mm

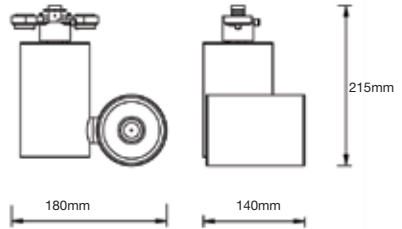

COB Series

30W VT-4635

1295 3000k Warm White

1296 4000K Day White

1297 6400k White

EAN Code

3800157619820



3800157619837

3800157619844

A+




EQ. Watts:	200W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50Hz	Beam Angle:	24°
Luminous Flux:	2700lm	Base:	Black
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>95	Dimension:	180 x 140 x 215mm

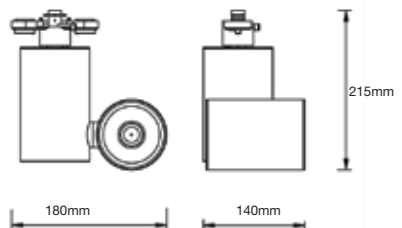



LUMINOUS INTENSITY DISTRIBUTION



SUITABLE FOR 4-LINE TRACKS
FITS INTO ANY EUROSTANDARD 3-PHASE TRACK


4-Line Tracks

33W VT-4535

1233 3000K Warmwhite
1234 4000K Daywhite
1235 5000K White

EAN Code


3800157603720
3800157603737
3800157603744



Eq. Watts:	100W	PF:	> 0.9
Voltage/Frequency:	AC: 100-240V,50/60Hz	Beam Angle:	25°
Luminous Flux:	1800lm	Color of Fixture:	Black
LED Type:	SMD	Body Type:	Die Cast Aluminum
CRI:	> 95	Dimension:	112 x 165 x 205mm



LUMINOUS INTENSITY DISTRIBUTION



SUITABLE FOR 4-LINE TRACKS
FITS INTO ANY EUROSTANDARD 3-PHASE TRACK


4-Line Tracks

45W VT-4545

1236 3000K Warmwhite
1237 4000K Daywhite
1238 5000K White

EAN Code

3800157603751
3800157603768
3800157603775




Eq. Watts:	135W	PF:	>0.9
Voltage/Frequency:	AC: 100-240V,50/60Hz	Beam Angle:	25°
Luminous Flux:	2300lm	Base:	Black
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>95	Dimension:	112 x 165 x 218mm



4-LINE TRACK

23W VT-4521T
1202 5000K White

EAN Code
3800157600187




EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	46°
Luminous Flux:	1500lm	Color of Fixture:	Black
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80	Dimension:	80 x 185mm



4-LINE TRACK

23W VT-4521T
1201 5000K White

EAN Code
3800157600170




EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	46°
Luminous Flux:	1500lm	Base:	White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80	Dimension:	80 x 185mm



4-LINE TRACK

35W VT-4540T
1191 3000K Warmwhite
1192 4000K Daywhite

EAN Code
3800230629548
3800230629555



EQ. Watts:	200W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	22°
Luminous Flux:	2600lm	Base:	Black
LED Type:	COB	Body Type:	Aluminum
CRI:	>70	Dimension:	225 x 185 x 138mm



4-LINE TRACK

33W VT-4534

- 1242 3000K Warmwhite
- 1231 4000K Daywhite
- 1232 5000K White



EAN Code

- 3800157604000
- 3800157602525
- 3800157602532



EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	22°
Luminous Flux:	2300lm	Color of Fixture:	Black
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80	Dimension:	106 x 208 x 206mm

LUMINOUS INTENSITY DISTRIBUTION



4-LINE TRACK

33W VT-4534

- 1241 3000K Warmwhite
- 1229 4000K Daywhite
- 1230 5000K White



EAN Code

- 3800157603997
- 3800157602501
- 3800157602518



EQ. Watts:	100W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	22°
Luminous Flux:	2300lm	Base:	White
LED Type:	COB	Body Type:	Die Cast Aluminum
CRI:	>80	Dimension:	106 x 208 x 206mm

LUMINOUS INTENSITY DISTRIBUTION





4-LINE TRACK

45W VT-4546

1249 3000K WarmWhite
1250 4500K DayWhite
1251 6000K White



EAN Code

3800157607490
3800157607505
3800157607513

A

EQ. Watts:	250W	PF:	>0.95
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	20°
Luminous Flux:	3250lm	Base:	White
LED Type:	COB	Body Type:	PC + Aluminum
CRI:	>80	Dimension:	110 x 255mm

LUMINOUS INTENSITY DISTRIBUTION

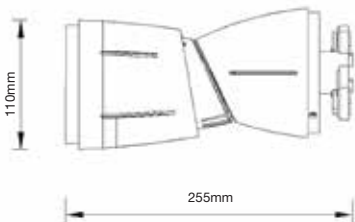

4-LINE TRACK

45W VT-4546

1252 3000K WarmWhite
1253 4500K DayWhite
1254 6000K White



EAN Code

3800157607520
3800157607537
3800157607544

A

EQ. Watts:	250W	PF:	>0.95
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	20°
Luminous Flux:	3250lm	Color of Fixture:	White
LED Type:	COB	Body Type:	PC + Aluminum
CRI:	>80	Dimension:	110 x 255mm

LUMINOUS INTENSITY DISTRIBUTION

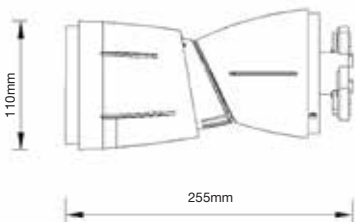



4-LINE TRACK

35W VT-4536

- 1255 3000K WarmWhite
- 1256 4500K DayWhite
- 1257 6000K White



EAN Code

- 3800157607551
- 3800157607568
- 3800157607575



EQ. Watts:	120W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	24°
Luminous Flux:	3450lm	Base:	White
LED Type:	COB	Body Type:	Aluminum
CRI:	>80	Dimension:	92 x 165 x 192mm

LUMINOUS INTENSITY DISTRIBUTION



4-LINE TRACK

35W VT-4536

- 1285 3000K WarmWhite
- 1286 4000K DayWhite
- 1287 6000K White



EAN Code

- 3800157618694
- 3800157618700
- 3800157618717



EQ. Watts:	120W	PF:	>0.9
Voltage/Frequency:	AC:220-240V,50/60Hz	Beam Angle:	24°
Luminous Flux:	3450lm	Base:	White
LED Type:	COB	Body Type:	Aluminum
CRI:	>80	Dimension:	92 x 165 x 192mm

LUMINOUS INTENSITY DISTRIBUTION

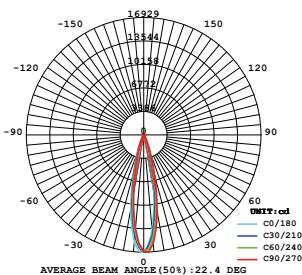



Track Fittings

SKU code:	3545	3546	3555
Description:	GU10 Fitting	GU10 Fitting	E27- PAR20 Fitting
Track Line:	2 Line Black	2 Line White	2 Line Black
EAN code:	3800230628305	3800230628312	3800230628404



Track Fittings

SKU code:	3556	3549	3550
Description:	E27- PAR20 Fitting	E27- PAR30 Fitting	E27- PAR30 Fitting
Track Line:	2 Line White	2 Line Black	2 Line White
EAN code:	3800230628411	3800230628343	3800230628350



PAR 20-30-38
Compatible



PAR 20-30-38
Compatible



Track Fittings

SKU code:	3569	3568	3572
Description:	E27- PAR38 Fitting	E27 Fitting	E27 Fitting
Track Line:	2 Line White	2 Line White	2 Line Black
EAN code:	3800157604246	3800157602419	3800157604277



Track Fittings

SKU code:	3544	3543	3554
Description:	GU10 Fitting	GU10 Fitting	E27-PAR20 Fitting
Track Line:	4 Line White	4 Line Black	4 Line White
EAN code:	3800230628299	3800230628282	3800230628398



Track Fittings

SKU code:	3553	3548	3547
Description:	E27- PAR20 Fitting	E27- PAR 30 Fitting	E27- PAR30 Fitting
Track Line:	4 Line Black	4 Line White	4 Line Black
EAN code:	3800230628381	3800230628336	3800230628329



PAR 20-30-38
Compatible



PAR 20-30-38
Compatible



Track Fittings

SKU code:	3570	3567	3574
Description:	E27- PAR38 Fitting	E27 Fitting	E27 Fitting
Track Line:	4 Line White	4 Line White	4 Line Black
EAN code:	3800157604252	3800157602402	3800157604291



SKU Code **3656**
Description **4I Track Light Accessory Mini Black**
EAN Code **3800157619110**



SKU Code **3655**
Description **4I Track Light Accessory Mini White**
EAN Code **3800157619103**



SKU Code **3522**
Description **4I Track Light Accessory White**
EAN Code **3800230623232**



SKU Code **3523**
Description **4I Track Light Accessory Black**
EAN Code **3800230623195**



SKU Code **3524**
Description **4T Track Light Accessory Black**
EAN Code **3800230623201**



SKU Code **3525**
Description **4T Track Light Accessory White**
EAN Code **3800230623249**



SKU Code **3526**
Description **4X Track Light Accessory Black**
EAN Code **3800230623218**

			
SKU Code	3527	3528	3529
Description	4X Track Light Accessory White	4L Track Light Accessory Black	4L Track Light Accessory White
EAN Code	3800230623256	3800230623225	3800230623263


			
SKU Code	3557	3558	3559
Description	130mm 4 Line Black	130mm 4 Line White	Flexible Joint 4 Line Black
EAN Code	3800230628428	3800230628435	3800230628442



			
SKU Code	3560	3565	3566
Description	Flexible Joint 4 Line White	Hanging Track Line Kit 1m Black	Hanging Track Line Kit 1m White
EAN Code	3800230628459	3800157600019	3800157600026


			
SKU Code	3567	3568	3639
Description	E27 Fitting 4 Line White	E27 Fitting 2 Line White	2T Track Accessory-Black
EAN Code	3800157602402	3800157602419	3800157612753

			
SKU Code	3635	3636	3637
Description	2I Track Accessory-Black	2I Track Accessory-white	2L Track Accessory-Black
EAN Code	3800157612715	3800157612722	3800157612739

			
SKU Code	3638	3634	3633
Description	2L Track Accessory-white	2M 2 Core Track-white	2M 2 CORE TRACK-Black
EAN Code	3800157612746	3800157612708	3800157612692

			
SKU Code	9944	9945	9952
Description	1 Meter Black 4 Core Track	1 Meter White 4 Core Track	1.5 Meters Black 4 Core Track
EAN Code	3800230623133	3800230623164	3800230623140

			
SKU Code	9953	9954	9955
Description	1.5 Meters White 4 Core Track	2 Meters Black 4 Core Track	2 Meters White 4 Core Trac
EAN Code	3800230623171	3800230623157	3800230623188

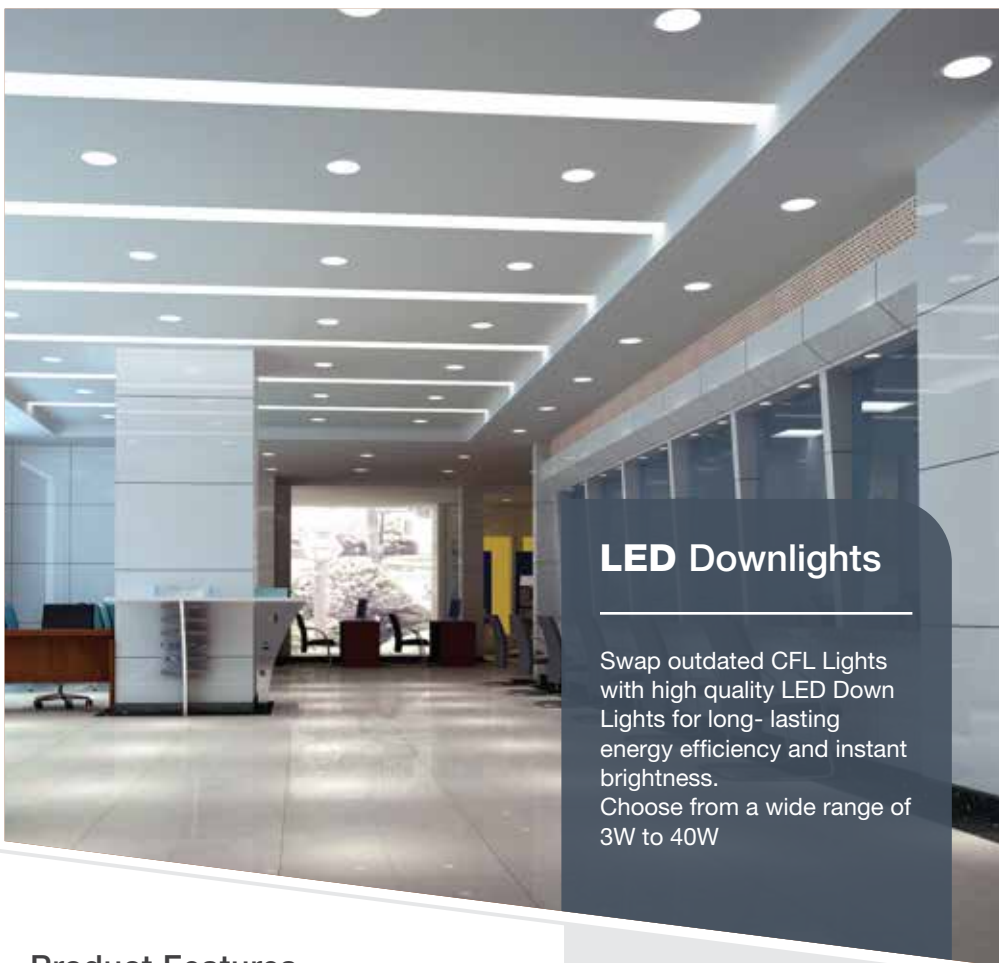

LED Downlights

Swap outdated CFL Lights with high quality LED Down Lights for long- lasting energy efficiency and instant brightness. Choose from a wide range of 3W to 40W

Product Features

- Innumerable styles & Elegant appearance
- Non - Flickering
- No UV Radiation
- Best Quality LED Chips from companies like CREE & SAMSUNG
- Premium Quality Power Driver with lowest power factor saver & high RA
- Easy Installation
- Varied finishes with strong die cast Aluminium body
- Low Maintenance
- All down lights come with premium quality power



Applications

Residences, Showrooms, Hotels & Boutiques etc.



Reflector Downlight

30W VT-26301


1276 3000K Warmwhite
1277 4500K Daywhite
1278 6000K White

EAN Code


3800157611985
3800157611992
3800157612005



120⁺⁺
LM/W
HIGH LUMENS



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	270W	Beam Angle:	120 °
Voltage/Frequency:	AC: 100-277V, 50/60Hz	Body Type:	PKW (White)
Luminous Flux:	3600lm	Shape:	Round
LED Type:	COB	Dimension:	Ø 220mm x 103mm
CRI:	>80	Cutting Size:	Ø207mm
PF	> 0.9		



Reflector Downlight

40W VT-26451


1279 4500K Daywhite
1280 6000K White

EAN Code


3800157612012
3800157612029




120⁺⁺
LM/W
HIGH LUMENS



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	350W	Beam Angle:	120 °
Voltage/Frequency:	AC: 100-277V, 50/60Hz	Body Type:	PKW (White)
Luminous Flux:	4800lm	Shape:	Round
Commercial Type:	COB	Dimension:	Ø 220mm x 103mm
CRI:	>80	Cutting Size:	Ø207mm
PF:	> 0.9		



Reflector Downlight

10W VT-2610


EAN Code

- 1102 3000K Warmwhite
- 1101 4500K Daywhite
- 1100 6000K White

- 3800230622396
- 3800230622389
- 3800230622372



EQ. Watts:	25W	Beam Angle:	120 °
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PKW (White)
Luminous Flux:	730lm	Shape:	Round
LED Type:	COB	Dimension:	Ø 135mm x 71mm
CRI:	>80	Cutting Size:	Ø105mm
PF	> 0.5		



Reflector Downlight

20W VT-2620


EAN Code

- 1108 3000K Warmwhite
- 1104 4500K Daywhite
- 1103 6000K White

- 3800230625410
- 3800230622419
- 3800230622402



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	50W	Beam Angle:	120 °
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PKW (White)
Luminous Flux:	1500lm	Shape:	Round
Commercial Type:	COB	Dimension:	Ø 182mm x 90mm
LED Type:	>80	Cutting Size:	Ø160mm
CRI:	> 0.5		




Reflector Downlight

30W VT-2630


- 1107 3000K Warmwhite
- 1106 4500K Daywhite
- 1105 6000K White

EAN Code

- 3800230625021
- 3800230622433
- 3800230622426



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	75W	Beam Angle:	120 °
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PKW (White)
Luminous Flux:	2400lm	Shape:	Round
LED Type:	COB	Dimension:	Ø 222mm x 111mm
CRI:	>80	Cutting Size:	Ø205mm
PF	> 0.9		




Reflector Downlight

40W VT-2645


- 1163 3000K Warmwhite
- 1164 4500K Daywhite
- 1165 6000K White

EAN Code

- 3800230627285
- 3800230627292
- 3800230627308



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



EQ. Watts:	100W	Beam Angle:	120 °
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PKW (White)
Luminous Flux:	3200lm	Shape:	Round
Commercial Type:	COB	Dimension:	Ø 222mm x 111mm
LED Type:	≥80	Cutting Size:	Ø205mm
CRI:	> 0.9		



COB Downlight

3W VT-1123 RD

- 5098 3000K Warmwhite
- 5099 4500K Daywhite
- 5107 6000K White

EAN Code

- 3800157609401
- 3800157609418
- 3800157609425



EQ. Watts:	24W	Beam Angle:	60 °
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum
Luminous Flux:	200lm	Shape:	Round
LED Type:	COB	Dimension:	Ø45 x 35mm
CRI:	>80	Cutting Size:	Ø36mm
PF	> 0.5		



COB Downlight

3W VT-1123 SQ

- 5108 3000K Warmwhite
- 5109 4500K Daywhite
- 5110 6000K White

EAN Code

- 3800157609432
- 3800157609449
- 3800157609456



EQ. Watts:	24W	Beam Angle:	60 °
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum
Luminous Flux:	200lm	Shape:	Square
Commercial Type:	COB	Dimension:	45 x 45 x 35mm
LED Type:	>80	Cutting Size:	36 x 36 mm
CRI:	> 0.5		



COB Downlight

3W VT-1133 RD


5092 3000K Warmwhite
5093 4500K Daywhite
5094 6000K White

EAN Code

3800157609340
3800157609357
3800157609364



EQ. Watts:	24W	Beam Angle:	60 °
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum
Luminous Flux:	200lm	Shape:	Round
LED Type:	COB	Dimension:	Ø55 x 42mm
CRI:	>80	Cutting Size:	Ø45mm
PF	> 0.5		



COB Downlight

3W VT-1133 SQ

5095 3000K Warmwhite
5096 4500K Daywhite
5097 6000K White

EAN Code

3800157609371
3800157609388
3800157609395



EQ. Watts:	24W	Beam Angle:	60 °
Voltage/Frequency:	AC: 85-265V, 50/60Hz	Body Type:	Aluminum
Luminous Flux:	200lm	Shape:	Square
Commercial Type:	COB	Dimension:	55 x 55 x 42mm
LED Type:	>80	Cutting Size:	45 x 45mm
CRI:	> 0.5		



COB Downlight

8W VT-2908 RD



EAN Code

- 1116 3000K Warmwhite
- 1117 4000K Daywhite
- 1118 6000K White

- 3800230625144
- 3800230625151
- 3800230625168



EQ. Watts:	32W	Beam Angle:	24 °
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Powder Coating Diecast
Luminous Flux:	550lm	Shape:	Round
LED Type:	COB	Dimension:	Ø103 x 75mm
CRI:	>80	Cutting Size:	Ø90mm
PF	> 0.5		

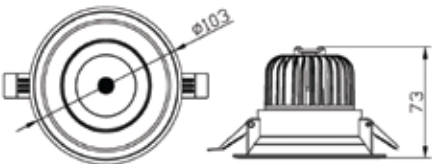

COB Downlight

8W VT-2908 SQ



EAN Code

- 1113 3000K Warmwhite
- 1114 4000K Daywhite
- 1115 6000K White

- 3800230625175
- 3800230625182
- 3800230625199



EQ. Watts:	32W	Beam Angle:	24 °
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	Powder Coating Diecast
Luminous Flux:	550lm	Shape:	Square
Commercial Type:	COB	Dimension:	103 x 103 x 75mm
LED Type:	>80	Cutting Size:	90 x 90mm
CRI:	> 0.5		

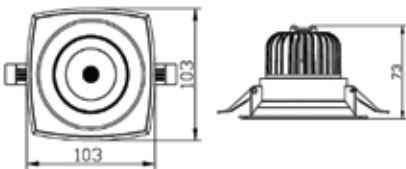




Step Light

2W VT-1142

1315 3000k Warm White
1314 4000K Day White

EAN Code

3800157620437
3800157620420



EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60LM	Color of Fixture:	White
Body Type:	PC	Shape:	Round
CRI:	>80	Dimension:	ø150 x 27mm




Step Light

2W VT-1142

1317 3000k Warm White
1316 4000K Day White

EAN Code

3800157620451
3800157620444



EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60LM	Color of Fixture:	Black
Body Type:	PC	Shape:	Round
CRI:	>80	Dimension:	ø150 x 27mm




Step Light

2W VT-1142


1319 3000k Warm White
1318 4000K Day White

EAN Code

3800157620475
3800157620468



EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60LM	Color of Fixture:	Grey
Body Type:	PC	Shape:	Round
CRI:	>80	Dimension:	ø150 x 27mm




Step Light

2W VT-1152

1321 3000k Warm White
1320 4000K Day White

EAN Code

3800157620499
3800157620482



EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60lm	Color of Fixture:	White
Body Type:	PC	Shape:	Square
CRI:	>80	Dimension:	124 x 124 x 27mm




Step Light

2W VT-1152


1323 3000k Warm White
1322 4000K Day White

EAN Code

3800157620512
3800157620505



EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60lm	Color of Fixture:	Black
Body Type:	PC	Shape:	Square
CRI:	>80	Dimension:	124 x 124 x 27mm




Step Light

2W VT-1152

1325 3000k Warm White
1324 4000K Day White

EAN Code

3800157620536
3800157620529




EQ. Watts:	10W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	60lm	Color of Fixture:	Grey
Body Type:	PC	Shape:	Square
CRI:	>80	Dimension:	124 x 124 x 27mm

Step Light

3W VT-1162
1327 3000k Warm White
1326 4000K Day White

EAN Code
3800157620550
3800157620543




EQ. Watts:	15W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	110LM	Color of Fixture:	White
Body Type:	PC	Shape:	Rectangle
CRI:	>80	Dimension:	230 x 80 x 28mm

Step Light

3W VT-1162
1329 3000k Warm White
1328 4000K Day White

EAN Code
3800157620574
3800157620567




EQ. Watts:	15W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	110LM	Color of Fixture:	White
Body Type:	PC	Shape:	Rectangle
CRI:	>80	Dimension:	230 x 80 x 28mm

Step Light

3W VT-1162
1331 3000k Warm White
1330 4000K Day White

EAN Code
3800157620598
3800157620581




EQ. Watts:	15W	PF:	0.5
Voltage/Frequency:	AC100-240V, 50/60 Hz	Beam Angle:	55 °
Luminous Flux:	110LM	Color of Fixture:	White
Body Type:	PC	Shape:	Rectangle
CRI:	>80	Dimension:	230 x 80 x 28mm




Step Light

3W VT-1109 RD
1207 3000K Warmwhite
1208 4200K Daywhite

EAN Code
3800157600231
3800157600248



LUMINOUS INTENSITY DISTRIBUTION




EQ. Watts:	12W	Beam Angle:	15 °
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Color of Fixture:	PKW (White)
Luminous Flux:	120lm	Shape:	Round
Body Type:	Aluminum	Dimension:	Ø80 x 51mm
CRI:	> 80	Cutting Size:	Ø62mm
PF:	> 0.5		




Step Light

3W VT-1109 SQ
1209 3000K Warmwhite
1210 4200K Daywhite
1223 6000K White

EAN Code
3800157600255
3800157600262
3800157601504



LUMINOUS INTENSITY DISTRIBUTION



EQ. Watts:	12W	Beam Angle:	15°
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Color of Fixture:	PKW (White)
Luminous Flux:	120lm	Shape:	Square
Body Type:	Aluminum	Dimension:	80 x 80 x 51mm
CRI:	> 80	Cutting Size:	62 x 62mm
PF:	> 0.5		




Step Light with Sensor

3W VT-8035

EAN Code

5570 4500k Day White

3800157617291



EQ. Watts:	15W	PF:	> 0.5
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	45 °
Luminous Flux:	100lm	Color of Fixture:	PKW (White)
Body Type:	Die cast Aluminum	Shape:	Square
CRI:	> 80	Dimension:	85 x 85 x 42mm




Step Light

3W VT-1143

EAN Code

1284 4000k Day White

3800157617307



EQ. Watts:	15W	Beam Angle:	83 °
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Color of Fixture:	PKW (White)
Luminous Flux:	100lm	Shape:	Square
Body Type:	Die cast Aluminum	Dimension:	85 x 85 x 43mm
CRI:	> 80	Cutting Size:	72 x 72mm
PF:	> 0.5		



Custom Angle

7W VT-2807

1110 5000K Daywhite

EAN Code

3800230622440



EQ. Watts:	18W	Beam Angle:	20 °
Voltage/Frequency:	AC: 170-240V, 50/60Hz	Body Type:	Ivory White
Luminous Flux:	550lm	Shape:	Zoom
LED Type:	COB.CREE	Dimension:	Ø100 x 76mm
CRI:	>80	Cutting Size:	Ø86mm
PF:	> 0.8		



Custom Angle

22W VT-2822

1111 5000K Daywhite

EAN Code

3800230622457



EQ. Watts:	55W	Beam Angle:	25 °
Voltage/Frequency:	AC: 170-240V, 50/60Hz	Body Type:	Ivory White
Luminous Flux:	1570lm	Shape:	Zoom
LED Type:	COB.CREE	Dimension:	Ø158 x 150mm
CRI:	>80	Cutting Size:	Ø140mm
PF:	> 0.8		



Custom Angle

30W VT-2830

1112 4000K Daywhite

EAN Code

3800230622464



EQ. Watts:	75W	Beam Angle:	25 °
Voltage/Frequency:	AC: 170-240V, 50/60Hz	Body Type:	Ivory White
Luminous Flux:	2100lm	Shape:	Zoom
LED Type:	COB.CREE	Dimension:	Ø190 x 160mm
CRI:	>80	Cutting Size:	Ø175mm
PF:	> 0.9		




Zoom Light

30W VT-2930

- 1306 3000K Warmwhite
- 1307 4500K Daywhite
- 1289 6000K White


EAN Code

- 3800157619936
- 3800157619943
- 3800157619646



235mm

A+



EQ. Watts:	170W	Beam Angle:	99°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	Aluminum, White
Luminous Flux:	2450lm	Shape:	Rectangle
LED Type:	COB	Dimension:	235 x 146 x 139mm
CRI:	≥80	Cutting Size:	220 x 132mm
PF:	> 0.9		




Zoom Light

33W VT-2933

- 1304 3000K Warmwhite
- 1305 4500K Daywhite
- 1288 6000K White

EAN Code


- 3800157619912
- 3800157619929
- 3800157619639



140mm

Ø165mm

A+



EQ. Watts:	200W	Beam Angle:	24°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	Aluminum, White
Luminous Flux:	2650lm	Shape:	Round
LED Type:	COB	Dimension:	Ø 165x140mm
CRI:	≥80	Cutting Size:	Ø 155
PF:	> 0.9		



LED Dome Lights

Introducing a customized innovation to an old problem LED DOME LIGHTS, Compact and Easy to install elegant replacement for traditional full round Dome Lights, Creates a perfect fusion between bright and dark spots for ambience of any environment


Product Features

- 80% Electricity savings as compared to traditional Incandescent Bulbs
- 20,000 hours Lifespan
- Non – Flickering
- No UV Radiation
- Easy Installation
- Premium Quality LED Chip
- Premium Quality Power Driver
- Instant start 0-100% in 0.01 seconds
- Extreme Weather toleration (-20 to + 45 Degrees Centigrade)



Applications



- Mostly used in Parking Lots, Passage's in big areas, Exterior Walls of Prestigious Buildings for ambience, Airports, Ports and Malls



LED Oval Dome Light

8W VT-8038

- 1308 3000k Warm White
- 1309 4000K Day White
- 1310 6400k White



EAN Code

- 3800157620260
- 3800157620277
- 3800157620284





EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PC
Luminous Flux:	560lm	Shape:	Rectangle
LED Type:	SMD	IP Rating:	IP54
CRI:	>70	Color of Fixture	Black
PF:	> 0.5	Dimension:	190 x 100 x 45 48mm



LED Oval Dome Light

8W VT-8038

- 1311 3000k Warm White
- 1312 4000K Day White
- 1313 6400k White



EAN Code

- 3800157620291
- 3800157620307
- 3800157620314



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PC
Luminous Flux:	560lm	Shape:	Rectangle
LED Type:	SMD	IP Rating:	IP54
CRI:	>70	Color of Fixture	White
PF:	> 0.5	Dimension:	190 x 100 x 45 48mm




LED Dome Light

15W VT-8033

5566 4500K Daywhite

EAN Code

3800157610353



EQ. Watts:	95W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PC
Luminous Flux:	1250lm	Shape:	Round
LED Type:	SMD	IP Rating:	IP44
CRI:	>80	Dimension:	Ø 220mm x 48mm
PF:	> 0.6		

EASY TO USE
PLUG AND PLAY

Luxurious Finish
SURFACE MOUNTED

TRIMLESS




LED Dome Light

15W VT-8033

5567 4500K Daywhite

EAN Code

3800157610360



EQ. Watts:	95W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	PC
Luminous Flux:	1250lm	Shape:	Square
LED Type:	SMD	IP Rating:	IP44
CRI:	>80	Dimension:	220 x 220 x 48mm
PF:	> 0.6		




Led Dome Light

12W VT-8031

5563 4500K Daywhite
5562 6500K White

EAN Code

3800157610322
3800157610315



EQ. Watts:	65W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	Metal + PMMA
Luminous Flux:	800lm	Shape:	Round
LED Type:	SMD	IP Rating:	IP20
CRI:	>80	Dimension:	Ø 250 x 80mm
PF:	> 0.6		



MAXIMUM LIGHT OUTPUT AND
ENERGY EFFICIENT




Led Dome Light

24W VT-8032

5565 4500K Daywhite
5564 6500K White

EAN Code

3800157610339
3800157610346



EQ. Watts:	125W	Beam Angle:	120°
Voltage/Frequency:	AC: 220-240V, 50Hz	Body Type:	Metal + PMMA
Luminous Flux:	1700lm	Shape:	Round
LED Type:	SMD	IP Rating:	IP20
CRI:	>80	Dimension:	Ø 320 x 95mm
PF:	> 0.6		




Led Dome Light

16W VT-8001C

1281 3000K Warmwhite
4965 4500K Daywhite
1282 6000K White

EAN Code

3800157612678
3800230625809
3800157612685



Sensor Type:	Microwave	Detection Distance:	*1-8m (radius)
Color:	White	Time Delay:	*10 sec to 12 min
Detection Range:	360°	Luminous Flux:	1300lm
Voltage:	AC: 220-240V,50Hz	Body Type:	PC Cover
Rated Load:	16W	IP Rating:	IP54
EQ. Watts:	100W	Dimension:	Ø296 x 96mm




Led Dome Light

Max.60W VT-8002C

4966
Time Delay
Adjustable

EAN Code

3800230625816



Sensor Type:	Microwave	Detection Distance:	*1-8m (radius)
Color:	White	Time Delay:	*10 sec to 12 min
Detection Range:	360°	Body Type:	ABS+Plastic+PMMA
Voltage:	AC: 220-240V,50Hz	IP Rating:	IP44
Rated Load:	Uses Max. 60W(E27)	Dimension:	Ø296 x 96mm
EQ. Watts:	As per E27 bulb		



SENSOR
INSIDE




Led Dome Light

12W VT-8008

4984 4500K Daywhite
4985 6000K White

EAN Code

3800157601290
3800157601306



Sensor Type:	Microwave	Detection Distance:	*10%/50%/100%
Color:	White	Time Delay:	10s/1min/5min/10min/30min
Detection Range:	Max.(0 x H): 10m x 4m, 360°	Luminous Flux:	840lm
Voltage:	AC: 200-240V,50/60Hz	Body Type:	ABS+Plastic+PMMA
Rated Load:	12W	IP Rating:	IP65
EQ. Watts:	60W	Dimension:	Ø300 x 100mm




Led Dome Light

12W VT-8007

4983 4500K Daywhite

EAN Code

3800157601283



Without Sensor

EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V, 50/60Hz	Color of Fixture:	White
Luminous Flux:	840lm	Body Type:	ABS+Plastic+PMMA
IP Rating:	IP65	Shape:	Full Round
CRI:	>70	Dimension:	Ø300 x 100mm
PF:	>0.9		



SENSOR
INSIDE

IP65
RATED
Led Dome Light


12W VT-8008

4981 3000K Warmwhite
4971 4500K Daywhite
4980 6000K White

EAN Code

3800230629586
3800230629036
3800230629579

A+



Sensor Type:	Microwave	Detection Distance:	*10%/50%/100%
Color:	Black	Time Delay:	*10s/1min/5min/10min/30min
Detection Range:	Max.(0 x H): 10m x 4m, 360°	Luminous Flux:	840lm
Voltage:	AC: 200-240V,50/60Hz	Body Type:	ABS+Plastic+PMMA
Rated Load:	12W	IP Rating:	IP65
EQ. Watts:	60W	Dimension:	Ø300 x 100mm



IP65
RATED

Without Sensor
Led Dome Light


12W VT-8007

4970 4500K Daywhite

EAN Code

3800230629029

A+



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	ABS+Plastic+PMMA
IP Rating:	IP65	Shape:	Full Round
CRI:	>70	Dimension:	Ø300 x 100mm
PF:	>0.9		




Led Dome Light

12W VT-8017

5057 3000K Warmwhite
5058 4500K Daywhite
5059 6000K White

EAN Code
3800157605250
3800157605267
3800157605274



Sensor Type	IR Sensor
Color	White
Detection Range	360°
Voltage	AC: 110-240V, 50Hz
Rated Load	12W (24PCS LED)
EQ. Watts	60W
Detection Distance	max.6m(<24°C)
Time Delay	*10 sec to 3 min
Luminous Flux	800lm
Body Type	ABS+Plastic+PMMA
IP Rating	IP20
Dimension	Ø290 x 60mm






Led Dome Light

12W VT-8016

5056 4500K Daywhite
5055 6000K White

EAN Code

3800157603980
3800157603348



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Full Oval
CRI:	>70	Dimension:	245 x 165 x 96mm
PF:	>0.5		




Led Dome Light

12W VT-8016

5054 4500K Daywhite
5053 6000K White

EAN Code

3800157603331
3800157603324



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	White
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Full Oval
CRI:	>70	Dimension:	245 x 165 x 96mm
PF:	>0.5		



Led Dome Light


8W VT-8014

1264 3000K Warmwhite
1263 4500K Daywhite
1265 6000K White



EAN Code

3800157611862
3800157611855
3800157611879



EQ. Watts:	20W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	White
Luminous Flux:	560lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Full Oval
CRI:	>70	Dimension:	126 x 187 x 76mm
PF:	>0.5		



Led Dome Light


8W VT-8014

1267 3000K Warmwhite
1266 4500K Daywhite
1268 6000K White



EAN Code

3800157611893
3800157611886
3800157611909



EQ. Watts:	20W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Black
Luminous Flux:	560lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Full Oval
CRI:	>70	Dimension:	126 x 187 x 76mm
PF:	>0.5		



Led Dome Light


12W VT-8010

4973 4500K Daywhite
1269 6000K White



EAN Code

3800230629050
3800157611916



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Full Oval
CRI:	>70	Dimension:	290 x 200 x 100mm
PF:	>0.9		




Led Dome Light

8W VT-8014

4999 3000K Warmwhite
1259 4500K Daywhite
4997 6000K White

EAN Code

3800157602556
3800157611817
3800157602259



A

EQ. Watts:	20W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	White
Luminous Flux:	560lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Round
CRI:	>70	Dimension:	Ø180 x 82mm
PF:	>0.5		




Led Dome Light

12W VT-8015

4998 3000K Warmwhite
5050 4500K Daywhite
4996 6000K White

EAN Code

3800157602549
3800157603294
3800157602228



A

EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	White
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Round
CRI:	>70	Dimension:	Ø220 x 105mm
PF:	>0.5		




Led Dome Light

8W VT-8014

1261 3000K Warmwhite
1260 4500K Daywhite
1262 6000K White

EAN Code

3800157611831
3800157611824
3800157611848



EQ. Watts:	20W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Black
Luminous Flux:	560lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Round
CRI:	>70	Dimension:	Ø180 x 82mm
PF:	>0.5		




Led Dome Light

12W VT-8015

5052 4500K Daywhite
5051 6000K White

EAN Code

3800157603317
3800157603300



EQ. Watts:	40W	Beam Angle:	120°
Voltage/Frequency:	AC: 200-240V, 50Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Round
CRI:	>70	Dimension:	Ø220 x 105mm
PF:	>0.5		



Led Dome Light


12W VT-8006

4969 4500K Daywhite

IP65
RATED

EAN Code
3800230629012

A+



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Half-Round
CRI:	>70	Dimension:	Ø300 x 100mm
PF:	>0.9		



Led Dome Light


12W VT-8006

4986 4500K Daywhite

IP65
RATED

EAN Code
3800157601313

A+



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Half-Round
CRI:	>70	Dimension:	Ø300 x 100mm
PF:	>0.9		



Led Dome Light


12W VT-8009

4972 4500K Daywhite

IP65
RATED

EAN Code
3800230629043

A+



EQ. Watts:	40W	Beam Angle:	110°
Voltage/Frequency:	AC: 200-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	840lm	Body Type:	Plastic Clad Aluminum
IP Rating:	IP65	Shape:	Half-Oval
CRI:	>70	Dimension:	290 x 200 x 100mm
PF:	>0.9		



Motion Sensor

Many areas like lobbies, parking garages, staircases remain unused for long hours, but do need lighting to be lit automatically in case of movement. A motion sensor is a device which detects movements, and in some cases light conditions and then transmits a signal for illumination.

Product Features

- Power saving
- Available for in-door and out door purposes
- Compatible with most of our models
- Proven quality from reliable suppliers
- Wide range of models to choose from




Applications

- Outdoor Areas like parking garages, Gardens compounds and yards
- Indoor areas like walkways, lobbies and staircases.



Infrared Sensor

Max **1000W** VT-8027 EAN Code
5086 3800157609173




Sensor Type:	Infrared	Time Delay:	*10sec±3sec-15min±1min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 220-240V,50Hz	Detector:	One
Rated Load:	Max.1000W	IP Rating:	IP20
Detection Distance:	Max.6m (<24° C)	Dimension:	120x35mm



Infrared Sensor -

Max **1000W** VT-8027 EAN Code
5087 3800157609180



Sensor Type:	Infrared	Time Delay:	*10sec±3sec-15min±1min
Color:	Black	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 220-240V,50Hz	Detector:	One
Rated Load:	Max.1000W	IP Rating:	IP20
Detection Distance:	Max.6m (<24° C)	Dimension:	120x35mm

Infrared Sensor



Max.400W VT-8028
5088

EAN Code
3800157609197



Sensor Type:	Infrared	Time Delay:	*10sec±3sec-15min±1min
Color:	White	Ambient Light:	<3-2000LUX
Detection Range:	12m-180°	Body Type:	PC
Voltage:	AC: 220-240V,50/60Hz	IP Rating:	IP44
Rated Load:	Max.400W	Dimension:	80x55x70mm
Detection Distance:	6m or 12m		

Infrared Sensor




Max.400W VT-8028
5089

EAN Code
3800157609203



Sensor Type:	Infrared	Time Delay:	*10sec±3sec-15min±1min
Color:	Black	Ambient Light:	<3-2000LUX
Detection Range:	12m-180°	Body Type:	PC
Voltage:	AC: 220-240V,50/60Hz	IP Rating:	IP44
Rated Load:	Max.400W	Dimension:	80x55x70mm
Detection Distance:	Max.12m (<24° C)		

Infrared Sensor



Max.300W VT-8029
5090

EAN Code
3800157609210




Sensor Type:	Infrared	Time Delay:	*10sec±3sec-5min±1min
Color:	White	Ambient Light:	<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 220-240V,50/60Hz	IP Rating:	IP20
Rated Load:	Max.300W	Dimension:	76 x 75.6mm
Detection Distance:	Max.6m (<24° C)		



Infrared Sensor-PIR Sensor Moving Head

Max.400W VT-8030 EAN Code
5091 3800157609227



Sensor Type:	Infrared	Time Delay:	*10sec±3sec-15min±1min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 220-240V,50/60Hz	IP Rating:	IP20
Rated Load:	Max.400W	Dimension:	98 x 73 x 82mm
Detection Distance:	Max.8m (<24° C)		



Infrared Sensor



Max.300W VT-8003 EAN Code
4967 3800230625823



Sensor Type:	Infrared	Time Delay:	*10 sec to 7min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	180°	Body Type:	PC
Voltage:	AC: 220-240V,50/60 Hz	Detector:	One
Rated Load:	Max.300W	IP Rating:	IP44
Detection Distance:	max.12m (<24° C)	Dimension:	86.4 x 60.4 x 98mm



Infrared Sensor



Max.300W VT-8003 EAN Code
5077 3800157606875



Sensor Type:	Infrared	Time Delay:	*10 sec to 7min
Color:	Black	Ambient Light:	*<3-2000LUX
Detection Range:	180°	Body Type:	PC
Voltage:	AC: 220-240V,50/60 Hz	Detector:	One
Rated Load:	Max.300W	IP Rating:	IP44
Detection Distance:	max.12m (<24° C)	Dimension:	86.4 x 60.4 x 98mm




Infrared Sensor

Max. **60W** VT-8005

EAN Code

4982

3800157600071



Sensor Type:	Infrared	Time Delay:	*10sec±3sec-5min±1min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 110-240V, 50/60Hz	IP Rating:	IP20
Rated Load:	Max.60W(E27)	Dimension:	Ø55.5 x 116.5mm
Detection Distance:	Max.6m (<24° C)		




Infrared Sensor

Max. **300W** VT-8004

EAN Code

4968

3800230625830




Sensor Type:	Infrared	Time Delay:	*10 sec to 7 min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	PC
Voltage:	AC: 220-240V,50Hz	Detector:	Three
Rated Load:	Max.300W	IP Rating:	IP20
Detection Distance:	max.12m (<24° C)	Dimension:	88 x 55mm



Housing for Microwave sensor

VT-8021
5079


EAN Code
3800157606899



Sensor Type:	Microwave
Color:	White
IP Rating:	IP65
Dimension:	Ø134 x 66.5mm



VT-8021

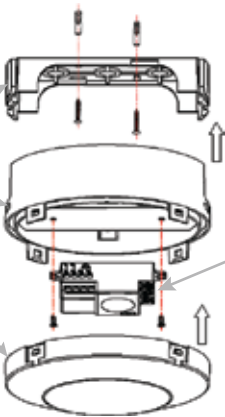


VT-8018



Microwave Sensor

Max.300W VT-8018
5078

EAN Code
3800157606882



Sensor Type:	Microwave	Time Delay:	*10 sec to 12 min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	360°	Body Type:	Plastic
Voltage:	AC: 220-240V,50/60Hz	Detector:	One
Rated Load:	Max.300W	IP Rating:	IP20
Detection Distance:	*1-8m (radius)	Dimension:	76x37x 27mm



Photocell Sensor

VT-8019

5081



EAN Code

3800157608015



Sensor Type:	Photocell	Time Delay:	*5 sec to 8 min
Color:	White	Ambient Light:	*<5-15LUX
Detection Range:	360°	Body Type:	Plastic
Voltage:	AC: 220-240V, 50Hz	Detector:	One
Rated Load:	Max.500/800W	IP Rating:	IP44
		Dimension:	35.5 x 46 x 44.1mm

Infrared Sensor


Max. 800W VT-8022

5082



EAN Code

3800157608022



Sensor Type:	IR Motion	Time Delay:	*5 sec to 8 min
Color:	White	Ambient Light:	*10 Lux/2000 Lux
Detection Range:	180°	Body Type:	PC
Voltage:	AC: 220-240V , 50Hz	Detector:	Three
Rated Load:	Max.500/800W	IP Rating:	IP44
Detection Distance:	3m/6m(choice) (<24°C)	Dimension:	36.8 x 25.5 x 55.4mm


Microwave Sensor

Max. 1200W VT-8023

5083

EAN Code

3800157608039




Sensor Type:	Microwave	Time Delay:	*10 sec to 12 min
Color:	White	Ambient Light:	*<3-2000LUX
Detection Range:	180°	Body Type:	Plastic
Voltage:	AC: 220-240V, 50/60Hz	Detector:	One
Rated Load:	Max.1200W	IP Rating:	IP20
Detection Distance:	*5m - 15m	Dimension:	80 x 80 x 32mm



ON/OFF VIA
MOVING HAND

Motion Sensor

Max. **300/500W** VT-8025
5084



EAN Code
3800157608046


Sensor Type:	IR Sensor	Detection Distance:	5cm/6cm (<24°C)
Color:	White	Body Type:	Plastic
Detection Range:	360°	Detector:	One
Voltage:	AC: 110-240V, 50/60Hz	IP Rating:	IP20
Rated Load:	Max.300/500W	Dimension:	35.5 x 78.2 x 20.6mm



ON/OFF VIA THE OPENING
AND CLOSING OFF THE DOOR

Motion Sensor

Max. **300/500W** VT-8026
5085



EAN Code
3800157608053

Sensor Type:	IR Sensor	Detection Distance:	5cm/6cm (<24°C)
Color:	White	Body Type:	Plastic
Detection Range:	360°	Detector:	One
Voltage:	AC: 110-240V, 50/60Hz	IP Rating:	IP20
Rated Load:	Max.300/500W	Dimension:	35.5 x 78.2 x 18.7mm





LED Table Lamps

Our most cozy and favorite corners, be it at work or at home, while you are working, or relaxing and reading a book, always deserve the best lighting conditions. To cater to this need we bring to you an exclusive range of LED table lamps designed with a touch of class, these lamps deliver very smooth lighting with suitable functions to set the right mood and ambiance.

Product Features

- Energy efficient ways of keeping it that way.
- Adjustable direction.
- Multiple functions like dimming, color changing.
- With USB charging functionality.
- Sleek and modern design.



Applications

- Table lamps can be used in any space, though they are most often found in bedrooms, living rooms at home next to sofas, chairs or beds. It is also a good accessory to be a part of the office decor.

Mood Lighting

Control your lights the way you want



BLUETOOTH
SPEAKER



Dimmable

Dimmable Table Lamp With Smart Speakers



RED

8509 3000K RGB

EAN Code 3800157621601



BLUE

8510 3000K RGB

EAN Code 3800157621618



BLACK

8511 3000K RGB

EAN Code 3800157621625



PINK

8512 3000K RGB


EAN Code 3800157621632




WHITE

8513 3000K RGB

EAN Code 3800157621649



Ø 95 x 122 mm



Color:	RGB + WW	Frequency response:	87-108 MHz
Watts:	5W	The sensitivity:	90db
Beam angle:	360°	Signal to noise ratio:	>80db
Voltage:	AC: 100-240v, 50/60Hz	Material:	ABS
Rating input:	DC: 5V	Built-in lithium battery:	2000 mAh
USB output:	5V 2A	Charging time:	2~3 hours
Transmission distance:	<10m	Working time:	3~4 hours (minimum), 20~24 hours (maximum)
Dimmable:	Yes		



PURPLE

5W VT-1035

SKU 8501



TOUCH DIMMING

EAN Code

3800157620345



EQ. Watts:	30W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	300lm	Color:	Chrome + Purple
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80	Dimension:	



PURPLE Wall Lamp

7W VT-1036

SKU 8504

EAN Code

3800157620376



EQ. Watts:	40W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	360lm	Color:	Chrome + Purple
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80		



WHITE

5W VT-1035

SKU 8502



TOUCH DIMMING

EAN Code

3800157620352



EQ. Watts:	30W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	300lm	Color:	Chrome + White
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80		



WHITE Wall Lamp

7W VT-1036

SKU 8505

EAN Code

3800157620383



EQ. Watts:	40W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	360lm	Color:	Chrome + White
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80		



BLUE

5W VT-1035

SKU 8503



TOUCH DIMMING

EAN Code

3800157620369



EQ. Watts:	30W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	300lm	Color:	Chrome + Blue
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80		



BLUE Wall Lamp

7W VT-1036

SKU 8506

EAN Code

3800157620390



EQ. Watts:	40W	PF:	>0
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	90°
Luminous Flux:	360lm	Color:	Chrome + Blue
IP Rating:	IP20	Body Type:	PC + Metal
CRI:	>80		



Dimmable

GREY

7W VT-1007D

7034 5000K White

EAN Code

3800157603836



Touch Control



6 Steps Dimming




1 hour timer



Eye Protection



Anti-radiation



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	400lm	Beam Angle:	120°
IP Rating:	IP20	Color:	Grey
CRI:	> 80	Body Type:	ABS
		Dimension:	170 x 135 x 415mm



Dimmable

PINK

7W VT-1007D

7042 5000K White

EAN Code

3800157605311



Touch Control



6 Steps Dimming




1 hour timer



Eye Protection



Anti-radiation



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	400lm	Beam Angle:	120°
IP Rating:	IP20	Color:	Pink
CRI:	> 80	Body Type:	ABS
		Dimension:	170 x 135 x 415mm



Dimmable

BLUE

7W VT-1007D

7043 5000K White

EAN Code

3800157605328



Touch Control



6 Steps Dimming




1 hour timer



Eye Protection



Anti-radiation



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	400lm	Beam Angle:	120°
IP Rating:	IP20	Color:	Blue
CRI:	> 80	Body Type:	ABS
		Dimension:	170 x 135 x 415mm



WHITE

7W VT-1009D

EAN Code

3800157605281



7039 { 3000K Warmwhite
4000K Daywhite
5000K White



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	650lm	Beam Angle:	120°
IP Rating:	IP20	Color:	White
CRI:	> 80	Body Type:	ABS + Aluminum
		Dimension:	240 x 396 x 180mm



Black and White

7W VT-1009D

EAN Code

3800157605298



7040 { 3000K Warmwhite
4000K Daywhite
5000K White



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	650lm	Beam Angle:	120°
IP Rating:	IP20	Color:	Black + White
CRI:	> 80	Body Type:	ABS + Aluminum
		Dimension:	240 x 396 x 180mm



White with Silver

7W VT-1010D

EAN Code

3800157603829



7033 { 3000K Warmwhite
4000K Daywhite
5000K White



Touch Control



6 Steps Dimming



1 hour timer



Eye Protection



Anti-radiation

Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	700lm	Beam Angle:	120°
IP Rating:	IP20	Color:	White with Silver
CRI:	> 80	Body Type:	ABS + Aluminum
		Dimension:	325 x 425 x 205mm



Dimmable

WHITE

7W VT-1008D

7035 5000K White

EAN Code

3800157603843



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	400lm	Beam Angle:	120°
IP Rating:	IP20	Color:	White
CRI:	> 80	Body Type:	ABS
		Dimension:	170 x 352 x 113mm



TOUCH DIMMING

WHITE

5W VT-1015

7051 4000K Daywhite

EAN Code

3800157610650



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	360lm	Beam Angle:	90°
IP Rating:	IP20	Color:	White
CRI:	> 80	Body Type:	ABS + Metal
		Dimension:	210 x 136 x 32mm



TOUCH DIMMING

BLACK

5W VT-1015

7052 4000K Daywhite

EAN Code

3800157610667



Voltage/Frequency:	AC: 100-240V, 50/60Hz	PF:	>0.45
Luminous Flux:	360lm	Beam Angle:	90°
IP Rating:	IP20	Color:	White
CRI:	> 80	Body Type:	ABS + Metal
		Dimension:	210 x 136 x 32mm



Light Wooden

6W VT-1012

SKU 7049

EAN Code

3800157610452



RECHARGEABLE



TOUCH DIMMING

Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	360°
Luminous Flux:	230lm	Color:	Light Wooden
IP Rating:	IP20	Body Type:	ACRYLIC + ABS
CRI:	>80	Dimension:	Ø108 x 172mm
PF:	>0.45		



MATT WHITE

6W VT-1012

SKU 7050

EAN Code

3800157610469



RECHARGEABLE



TOUCH DIMMING

Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	360°
Luminous Flux:	230lm	Color:	Matt White
IP Rating:	IP20	Body Type:	ACRYLIC + ABS
CRI:	>80	Dimension:	Ø108 x 172mm
PF:	>0.45		



SILVER

4W VT-1014

EAN Code

3800157616980



7098 { 3000K Warmwhite
4000K Daywhite
5000K White

Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	550lm	Color:	White + Silver
IP Rating:	IP20	Body Type:	ABS + PC + Aluminum
CRI:	> 80	Dimension:	200 x 50 x 263mm
PF:	>0.45		



GOLD

4W VT-1014

EAN Code

3800157616997



7099 { 3000K Warmwhite
4000K Daywhite
5000K White

Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	550lm	Color:	White + Gold
IP Rating:	IP20	Body Type:	ABS + PC + Aluminum
CRI:	> 80	Dimension:	200 x 50 x 263mm
PF:	>0.45		



BLACK

4W VT-1014

EAN Code

3800157617215



8500 { 3000K Warmwhite
4000K Daywhite
5000K White

Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	550lm	Color:	Black
IP Rating:	IP20	Body Type:	ABS + PC + Aluminum
CRI:	> 80	Dimension:	200 x 50 x 263mm
PF:	>0.45		



WHITE

7W VT-1017

7053 4000K Daywhite

A+

EAN Code

3800157610674



Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	500lm	Color:	White
IP Rating:	IP20	Body Type:	ABS + Metal
CRI:	> 80	Dimension:	376 x 166 x 270mm
PF:	>0.45		



BLACK

7W VT-1017

7054 4000K Daywhite

A+

EAN Code

3800157610681



Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	500lm	Color:	Black
IP Rating:	IP20	Body Type:	ABS + Metal
CRI:	>80	Dimension:	376 x 166 x 270mm
PF:	>0.45		



SLIVER

Max. **60W** VT-7500
7056 4000K Daywhite

EAN Code
3800157610704



Max. Watts:	60W	Color:	White
Voltage/Frequency:	AC:100-240V,50/60Hz	Body Type:	ABS + Metal
Holder:	E27	Dimension:	Ø250 x H1800mm
IP Rating:	IP20		

BLACK

Max. **60W** VT-7500
7055 4000K Daywhite

EAN Code
3800157610698



Max. Watts:	60W	Color:	Black
Voltage/Frequency:	AC:100-240V,50/60Hz	Body Type:	ABS + Metal
Holder:	E27	Dimension:	Ø250 x H1800mm
IP Rating:	IP20		



WHITE

Max. **60W** VT-7600

EAN Code

3704 Floor Lamp

3800157610773

Max. Watts:	60W	Color:	White
Voltage/Frequency:	AC:100-240V,50/60Hz	Body Type:	Aluminum + Glass
Holder:	E27	Dimension:	200 x 200 x 1600mm
IP Rating:	IP20		



BLACK

Max. **60W** VT-7600

EAN Code

3703 Floor Lamp

3800157610766

Max. Watts:	60W	Color:	Matt Black
Voltage/Frequency:	AC:100-240V,50/60Hz	Body Type:	Aluminum + Glass
Holder:	E27	Dimension:	200 x 200 x 1600mm
IP Rating:	IP20		



WHITE

7W VT-7700
8507 4000K Daywhite

EAN Code
3800157620406



EQ. Watts:	40W	PF:	
Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Color:	White
IP Rating:	IP20	Body Type:	ABS + Metal
CRI:	> 80	Dimension:	220 x440 x H1035.5mm



BLACK

7W VT-7700
8508 4000K Daywhite

EAN Code
3800157620413



EQ. Watts:	40W	PF:	
Voltage/Frequency:	AC:100-240V,50/60Hz	Beam Angle:	120°
Luminous Flux:	420lm	Color:	Black
IP Rating:	IP20	Body Type:	ABS + Metal
CRI:	>80	Dimension:	220 x440 x H1035.5mm



LED Outdoor Lights

Transform the exteriors of a Building or a Garden into a Beautiful piece of Architecture.

Simultaneously help navigate obstacles at night, prevent accidents and provide security.

Product Features

- Perfect replacement for traditional fittings as they are more flexible & efficient
- Work perfectly in extreme temperatures from -20° to $+45^{\circ}$ without any adverse effects
- Specifically designed for Outdoor use
- IP65/67 Protection Rating to ensure safety
- Low Maintenance
- Outstanding Colour options and settings

Applications

- Used for Gardens, Outdoor Residential Areas, Walkways & Passages, Driveways, Fountains, Lawns, Entrance, Patio or Terrace and similar environments





WHITE

1.5W VT-767

SKU 7096



Watts:	1.5W	Sensing Range	2-6 mtrs
Voltage:	3.7V Lithium Battery 1200mA	Charging Time:	6-7 hrs Sunlight Charging
Lumens:	200lm	Working Time:	Min 8 hrs and Max 24 hrs
Color:	4000k + 3000k	Protection Rating:	IP65
No. of LED:	10pcs (Front 8pcs, Back 2 pcs)	Material:	High quality Mono crystal Silicon
Detecting Angle:	120°	Dimension:	152 x 96 x 83.4mm



Solar LED Wall Light
With Sensor




BLACK

1.5W VT-767

SKU 7097



Watts:	1.5W	Sensing Range	2-6 mtrs
Voltage:	3.7V Lithium Battery 1200mA	Charging Time:	6-7 hrs Sunlight Charging
Lumens:	200lm	Working Time:	Min 8 hrs and Max 24 hrs
Color:	4000k + 3000k	Protection Rating:	IP65
No. of LED:	10pcs (Front 8pcs, Back 2 pcs)	Material:	High quality Mono crystal Silicon
Detecting Angle:	120°	Dimension:	152 x 96 x 83.4mm



Solar LED Wall Light
With Sensor



White & Black

3W VT-768
SKU 7523



Watts:	3W	Sensing Range	2-6 mtrs
Voltage:	400lm	Charging Time:	6-7 hrs Sunlight Charging
Lumens:	4000k + 3000k	Working Time:	Min 5-8 hrs and Max 24 hrs
Color:	30pcs (Front 28pcs, Back 2 pcs)	Protection Rating:	IP65
No. of LED:	3.7V Lithium Battery 2000mA	Material:	ABS + PC
Detecting Angle:	60°	Dimension:	140 x 212 x 109.2



18W VT-1233

5103 RGB
5106 3000K Warmwhite
5102 6000K White

EAN Code

3800230627124
3800157601115
3800230627117



EQ. Watts:	100W	Body Type:	Thick Glass
Voltage/Frequency:	AC: 12V, 50/60Hz	IP Rating:	IP68
Luminous Flux:	1100lm	Dimension:	D: 168mm x 105mm
Beam AngleRI:	120°		



18W VT-1235

5105 3000K Warmwhite
5104 6000K White

EAN Code

3800157601108
3800157601092



EQ. Watts:	100W	Body Type:	PVC Case
Voltage/Frequency:	AC: 12V, 50/60Hz	IP Rating:	IP68
Luminous Flux:	1100lm	Dimension:	D: 298mm x 76mm
Beam AngleRI:	180°		



Wall Fixtures

Model No:	VT-722	VT-726
SKU:	4793	7032
Type:	Wall	Wall
Holder:	2 x GU10	E27
Material:	304SS, Glass	304SS Lampbody, Frosted PC
Color of Fixture:	Silver	Satin Nickel
IP Rating:	IP44	IP44
Dimension:	Ø60 x 156mm	Ø102 x 200mm
EAN Code:	3800230625281	3800157603713



Wall Fixtures

Model No:	VT-7621	VT-7622
SKU:	7501	7500
Type:	Wall	Wall
Holder:	GU10	2 x GU10
Material:	Stainless Steel	Stainless Steel
Color of Fixture:	Stainless Steel Brush	Stainless Steel Brush
IP Rating:	IP44	IP44
Dimension:	Ø93 x 85 x 118mm	Ø93 x 85 x 163mm
EAN Code:	3800157617604	3800157617598



Wall Fixtures

Model No:	VT-7621 PIR Sensor	VT-7622 PIR Sensor	VT-7631
SKU:	7502	7503	7505
Type:	Wall	Wall	Wall
Holder:	GU10	2 x GU10	GU10
Material:	Stainless Steel	Stainless Steel	Stainless Steel
Color of Fixture:	Stainless Steel Brush	Stainless Steel Brush	Stainless Steel Brush
IP Rating:	IP44	IP44	IP44
Dimension:	Ø110 x 67 x 163mm	Ø110 x 67 x 220mm	Ø110 x 60 x 125mm
EAN Code:	3800157617611	3800157617628	3800157617642



Wall Fixtures

Model No:	VT-7632	VT-7641	VT-7642
SKU:	7504	7506	7507
Type:	Wall	Wall	Wall
Holder:	2 x GU10	GU10	2 x GU10
Material:	Stainless Steel	Stainless Steel	Stainless Steel
Color of Fixture:	Stainless Steel Brush	Stainless Steel Brush	Stainless Steel Brush
IP Rating:	IP44	IP44	IP44
Dimension:	Ø110 x 60 x 178mm	Ø105 x 76 x 118mm	Ø105 x 76 x 207mm
EAN Code:	3800157617635	3800157617659	3800157617666



IP44
RATED



IP44
RATED

Wall Fixtures

Model No:	VT-7651	VT-7651
SKU:	7508	7510
Type:	Wall	Wall
Holder:	GU10	GU10
Material:	Aluminium	Aluminium
Color of Fixture:	Black	Black
IP Rating:	IP44	IP44
Dimension:	Ø92 x 68 x 80mm	92 x 68 x 80mm
EAN Code:	3800157617673	3800157617697



LIGHTS



IP44
RATED



LIGHTS



IP44
RATED



LIGHTS



IP44
RATED

Wall Fixtures

Model No:	VT-7652	VT-7652	VT-7662
SKU:	7509	7511	7512
Type:	Wall	Wall	Wall
Holder:	2 x GU10	2 x GU10	2 x GU10
Material:	Aluminium	Aluminium	Stainless Steel
Color of Fixture:	Black	Black	Black
IP Rating:	IP44	IP44	IP44
Dimension:	Ø92 x 68 x 150mm	92 x 68 x 150mm	85 x 87 x 250mm
EAN Code:	3800157617680	3800157617703	3800157617710



Underground Fixtures

Model No:	VT-721 UG	VT-7677	VT-7677
SKU:	4791	7515	7516
Type:	Underground	Underground	Underground
Holder:	GU10	GU10	GU10
Material:	Aluminum, 304SS, Glass	Stainless Steel	Stainless Steel
Color of Fixture:	Black Lamp Body	Black	Black
IP Rating:	IP65	IP65	IP65
Dimension:	101 x 109 x 145mm	Ø110 x 110 x 120mm	110 x 110 x 120mm
EAN Code:	3800230625267	3800157617741	3800157617758



Garden Spikes

Model No:	VT-723 UG	VT-769	VT-770
SKU:	4792	7517	7518
Type:	Graden Spike	Graden Spike	Garden Spike
Holder:	GU10	GU10	GU10
Material:	Aluminum, 304SS, Glass	Aluminium	Stainless Steel
Color of Fixture:	Black Lamp Body	Black	Silver
IP Rating:	IP67	IP44	IP44
Dimension:	Ø95 x 317mm	95 x 95 x 335mm	60 x 60 x 420mm
EAN Code:	3800230625274	3800157617765	3800157617772



Garden Lamps

VTAC LED presents, the perfect outdoor lighting to make your garden glow after the sun goes down. Step outside with our wide range of contemporary outdoor lighting and decorate your pathways, walls, floors and ceilings with our modern designs.

Product Features

- Traditional Garden Lamps designed to fit the Modern day requirements
- Available in different designs, shapes and sizes
- Waterproof Lamps available in series of IP rating from IP 44 to IP 66
- Easy installation
- Applicable with GU10 -E27 base lights
- Suitable for Walls, Floor, Pathways and Ceiling Lights



Applications

Suitable for Outdoor Lighting



Wall Lamp


PLASTIC
DIFFUSER

VT-745
7064

EAN Code
3800157614399



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP54
Holder:	E27
Color of Fixture:	Matt Black
Body Type:	Aluminium + Plastic
Size:	145 x 265mm



Wall Lamp


PLASTIC
DIFFUSER

VT-745
7065

EAN Code
3800157614405



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP54
Holder:	E27
Color of Fixture:	Dark Grey
Body Type:	Aluminium + Plastic
Size:	145 x 265mm





Wall Lamp


**PLASTIC
DIFFUSER**

VT-754
7077

EAN Code
3800157616300

**IP44
RATED**

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Plastic
Size:	245 x 180 x 93mm



Wall Lamp


**PLASTIC
DIFFUSER**

VT-754
7076

EAN Code
3800157616294

**IP44
RATED**

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Plastic
Size:	245 x 180 x 93mm



Wall Lamp




VT-7670
7513

EAN Code
3800157617727



Voltage:	AC: 220-240V
Max. Watts:	14W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Stainless Steel + PC
Size:	250 x 90 x 100mm



Wall Lamp




VT-7680
7514

EAN Code
3800157617734



Voltage:	AC: 220-240V
Max. Watts:	14W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Stainless Steel + PC
Size:	250 x 90 x 100mm





Wall Lamp

VT-730


7046

EAN Code

3800157610391



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	200 x 238mm



Wall Lamp

VT-731


7047

EAN Code

3800157610407



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	200 x 238mm



Wall Lamp




VT-751
7070

EAN Code
3800157616232



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Glass
Size:	215 x375 x 170mm



Wall Lamp




VT-751
7071

EAN Code
3800157616249



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Glass
Size:	215 x375 x 170mm



Wall Lamp




VT-749
7066

EAN Code
3800157616195

 **IP44**
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Glass
Size:	208 x 360 x170 mm



Wall Lamp




VT-749
7067

EAN Code
3800157616201

 **IP44**
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Glass
Size:	208 x 360 x170 mm






Wall Lamp

VT-750 EAN Code
7068 3800157616218



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Glass
Size:	208 x 360 x170 mm




Wall Lamp

VT-750 EAN Code
7069 3800157616225



Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Glass
Size:	208 x 360 x170 mm






Wall Lamp - Short up

VT-760 EAN Code
7519 3800157617789


Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Matt Black
Body Type:	Aluminium + Glass
Size:	225 x 400 x 148mm



Wall Lamp - Short up

VT-760 EAN Code
7520 3800157617796

Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Matt White
Body Type:	Aluminium + Glass
Size:	225 x 400 x 148mm






Wall Lamp - Long up

VT-761 EAN Code
7521 3800157617802


Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Matt Black
Body Type:	Aluminium + Glass
Size:	245 x 445 x 185mm



Wall Lamp - Long up

VT-761 EAN Code
7522 3800157617819

Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Matt White
Body Type:	Aluminium + Glass
Size:	245 x 445 x 185mm





Stand Lamp

VT-753


7074

EAN Code

3800157616270

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Glass
Size:	170 x 170 x 403mm



Stand Lamp

VT-753


7075

EAN Code

3800157616287

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Glass
Size:	170 x 170 x 403mm



Stand Lamp

VT-754


7057

EAN Code

3800157612609

IP65
RATED

Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP65
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	170 x 290mm






Ceiling Lamp

VT-752 EAN Code
7072 3800157616256

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminium + Glass
Size:	170 x 170 x 840mm




Ceiling Lamp

VT-752 EAN Code
7073 3800157616263

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	40W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	White
Body Type:	Aluminium + Glass
Size:	170 x 170 x 840mm






Ceiling Lamp

VT-735
7058

EAN Code
3800157612616

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	170 x 720mm




Stand Lamp

VT-736
7059

EAN Code
3800157612623

IP44
RATED

Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	170 x 600mm






Stand Lamp

VT-737 EAN Code
7060 3800157612630


Voltage:	AC: 220-240V
Max.Watts:	60W
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	345 x 1365mm



Stand Lamp

VT-738 EAN Code
7061 3800157612647

Voltage:	AC: 220-240V
Max.Watts:	60W x 2
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	480 x 1410mm






Stand Lamp

VT-739 EAN Code
7062 3800157612654



Voltage:	AC: 220-240V
Max.Watts:	60W x 2
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	500 x 1990mm





Stand Lamp

VT-740 EAN Code
7063 3800157612661



Voltage:	AC: 220-240V
Max.Watts:	60W x 3
IP Rating:	IP44
Holder:	E27
Color of Fixture:	Black
Body Type:	Aluminum + Glass
Size:	500 x 1990mm



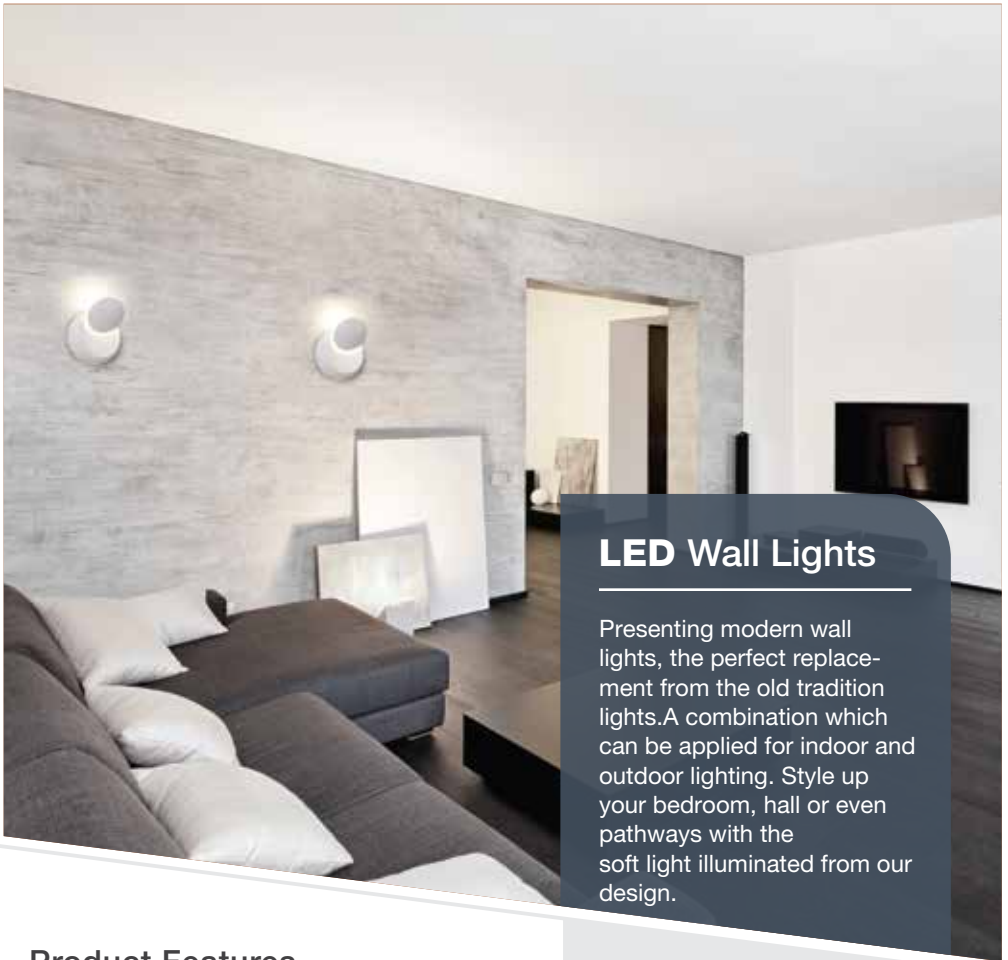

LED Wall Lights

Presenting modern wall lights, the perfect replacement from the old tradition lights. A combination which can be applied for indoor and outdoor lighting. Style up your bedroom, hall or even pathways with the soft light illuminated from our design.

Product Features

- Modern Wall lights available in sleek and stylish designs.
- Adjustable Beam Angle.
- Available in Black, Grey & White Colors
- Easy installation
- Perfect for Halls, Pathways, Bedroom, Kitchen & Terrace



Applications

Suitable for Residential lighting, Hotels, Restaurants, Resorts, Residential Lighting and similar environment



Wall Lamp

6W VT-741

7524 3000k Warm White
7525 4000K Day White

EAN Code

3800157620017
3800157620024



EQ. Watts:	50W	PF:	0.55
Voltage/Frequency:	AC220-240V, 50/60 Hz	Beam Angle:	360°
Luminous Flux:	660lm	Color of Fixture:	White
IP Rating:	IP20	Shape:	Die-cast Aluminum
CRI:	>80	Dimension:	ø 135 mm



Wall Lamp

9W VT-743

7526 3000k Warm White
7527 4000K Day White

EAN Code

3800157620031
3800157620048



EQ. Watts:	75W	PF:	0.55
Voltage/Frequency:	AC220-240V, 50/60 Hz	Beam Angle:	360°
Luminous Flux:	990lm	Color of Fixture:	White
IP Rating:	IP20	Shape:	Die-cast Aluminum
CRI:	>80	Dimension:	ø 180 mm




Black Wall Light-
Adjustable Beam Angle

6W VT-759

7078 3000K Warmwhite
7087 4000K Daywhite

EAN Code

3800157616379
3800157616874



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	Black
IP Rating:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	100 x 100 x 100mm

UP AND DOWN LIGHTS




White Wall Light-
Adjustable Beam Angle

6W VT-759

7079 3000K Warmwhite
7088 4000K Daywhite

EAN Code

3800157616386
3800157616881



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	White
Body Type:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	100 x 100 x 100mm

UP AND DOWN LIGHTS




Grey Wall Light-
Adjustable Beam Angle

6W VT-759

7080 3000K Warmwhite
7089 4000K Daywhite

EAN Code

3800157616393
3800157616898



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	Grey
IP Rating:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	100 x 100 x 100mm

UP AND DOWN LIGHTS




Black Wall Light- Adjustable Beam Angle

6W VT-756

7081 3000K Warmwhite
7090 4000K Daywhite

EAN Code

3800157616409
3800157616904



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	Black
IP Rating:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	140 x 100 x 115mm

UP AND DOWN LIGHTS




White Wall Light- Adjustable Beam Angle

6W VT-756

7082 3000K Warmwhite
7091 4000K Daywhite

EAN Code

3800157616416
3800157616911



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	White
Body Type:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	140 x 100 x 115mm

UP AND DOWN LIGHTS




Grey Wall Light- Adjustable Beam Angle

6W VT-756

7083 3000K Warmwhite
7092 4000K Daywhite

EAN Code

3800157616423
3800157616928



EQ. Watts:	50W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10~120°
Luminous Flux:	660lm	Color of Fixture:	Grey
IP Rating:	IP65	Body Type:	Aluminium
CRI:	> 80	Dimension:	140 x 100 x 115mm


UP AND DOWN LIGHTS



Wall Light-Rotatable

5W VT-757
7086 3000K Warmwhite
7093 4000K Daywhite

EAN Code
3800157616454
3800157616935




EQ. Watts:	45W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	10-360°
Luminous Flux:	560lm	Color of Fixture:	White
IP Rating:	IP44	Body Type:	Aluminium
CRI:	> 80	Dimension:	D:140 x 65mm-close D:140 x 105mm-open



Black Wall Light

5W VT-758
7084 3000K Warmwhite
7094 4000K Daywhite

EAN Code
3800157616430
3800157616942



EQ. Watts:	45W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	560lm	Color of Fixture:	Black
Body Type:	IP44	Body Type:	Aluminium
CRI:	> 80	Dimension:	100 x 80 x 100mm


UP AND DOWN LIGHTS



White Wall Light

5W VT-758
7085 3000K Warmwhite
7095 4000K Daywhite

EAN Code
3800157616447
3800157616959



EQ. Watts:	45W	PF:	>0.45
Voltage/Frequency:	AC: 110-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	560lm	Color of Fixture:	White
IP Rating:	IP44	Body Type:	Aluminium
CRI:	> 80	Dimension:	100 x 80 x 100mm

UP AND DOWN LIGHTS



LED Display Screen

VTAC LED's Display screen series perfectly designed for the best video output and display of images and information. Offering Display color of 281 trillions(synchronized). The perfect product for advertising and marketing.

Product Features

- Powerful LED display screen available in Indoor and Outdoor series
- Displays digital content such as Video, Images & Information
- Good Brand Value addition for Advertising
- Easy Installation
- Easy Installation

Applications

Suitable for Outdoor and Indoor Advertising, Hotel conference room, Restaurants, Showrooms, Casinos, Government facilities, Theaters, Retail outlets, Traffic control room, Security monitoring room, Stage background, HD cinema, Shopping malls, Railway stations, Airports.





Outdoor Display Screen

P6 Outdoor LED Finished Cabinet

SKU 11078 EAN Code 3800157617475 A++



Screen Parameter

Pixel Density	27777dots/sqm
Brightness	6500nits
Optimum View Distance	more than 6m
Gray Scale	16bits
Display Color	281 Trillions(synchronized)
Operation Power	220V-240V
Max Power Consumption	1350W/sqm
Control Mode	Synchronized
Refresh Frequency	400-800HZ
Fram Frequency	60HZ
Surport Signal Input	S-Video,RGBHV,YUV etc.
Control Distance	Utp140m, Single Mode Fiber 15km
Operating Humidity	10%-90%
Life Span(50% Brightness)	100000hrs
IP(Front/rear)	IP65/IP45

LED Cabinet Parameter

Cabinet Size(L*h*d)	768*768mm
Cabinet Resolution	128*128
Module Quantity Each Cabinet	4*4=16
Average Power Consumption	800w/cabinet
Cabinet Material	Iron
Cabinet Size	25kg/cabinet

LED Module Parameter

Pixel Pitch	6mm
Led Specification	SMD3535
Led Configuration	SMD 3 in 1
Module Size	192*192mm
Module Resolution	32*32=1024dot
Drive Method	1/8 scan constant current
Drive IC	SM16106



Indoor Display Screen

P5 Indoor LED Finished Cabinet

SKU EAN Code
11077 3800157617468 **A++**



Screen Parameter

Pixel Density	40000dots/sqm
Brightness	1800nits
Optimum View Distance	more than 5m
Gray Scale	16bits
Display Color	281 trillions(synchronized)
Operation Power	220V-240V
Max Power Consumption	750W/sqm
Control Mode	Synchronized
Refresh Frequency	400-700HZ
Fram Frequency	60HZ
Surport Signal Input	S-Video,RGBHV,YUV etc.
Control Distance	UTP140M,SINGLE MODE FIBER 15KM
Life Span(50% Brightness)	100000hrs
IP(Front/rear)	IP20

LED Cabinet Parameter

Cabinet Size(L*h*d)	640*640mm
Cabinet Resolution	128*128
Module Quantity Each Cabinet	2*4=8
Average Power Consumption	300w/cabinet
Cabinet Material	Iron
Cabinet Size	8kg/cabinet

LED Module Parameter

Pixel Pitch	5mm
Led Specification	SMD3528
Led Configuration	SMD 3 in 1
Module Size	320*160mm
Module Resolution	64*32=2048dot
Drive Method	1/16 scan constant current
Drive IC	SM16106



Indoor Display Screen

P4 Indoor LED Display Screen

SKU EAN Code
11079 3800157619493 **A++**



- Plug & Play
- Ideal For Renting Purpose
- Portable Moving For Events

Screen Parameter

Pixel Density	62500dots/sqm
Brightness	1100nits
Optimum View Distance	more than 5m
Gray Scale	16bits
Display Color	281 trillions(synchronized)
Operation Power	AC 220V-240V/ 50/60Hz
Power Consumption	300W/cabinet
Control Mode	Synchronized
Refresh Frequency	400-700HZ
Surport Signal Input	S-Video,RGBHV,YUV etc.
Control Distance	UTP140M,SINGLE MODE FIBER 15KM
Life Span(50% Brightness)	100000hrs
IP(Front)	IP40
Control System	PCTV nonlinearity card, DVI display card Linsn control system

LED Cabinet Parameter

Cabinet Size(L*h*d)	512*512*85mm
Cabinet Resolution	128*128
Module Quantity Each Cabinet	2*4=8
Power Consumption	300w/cabinet
Cabinet Material	Iron
Cabinet Weight	8kg/cabinet

LED Module Parameter

Pixel Pitch	4mm
Led Specification	SMD2121
Led Configuration	SMD 3 in 1
Module Size	256*128mm
Module Resolution	64*32=2048dot
Drive Method	1/16 scan constant current
Drive IC	SM16106
Power Consumption	25-30W



LED Pendants

Offering cutting edge designs as per your mood. From warm to bright task lighting, our pendants come in a wide variety of styles, colors and materials


Product Features

- Stylish pendant lamps and holders available in various shapes and sizes.
- Most suitable with A60, Candle, ST-64 & Globe Bulb Series.
- Easy to Install.
- Vibrant & elegant colors available.
- Applicable with E14 & E27 base, up to 60W applicable.
- Pendant lamps available in Copper, Glass,
- Pendant holders available in Bottle Shape, Chrome, Wooden, Concrete, Metal & Porcelain series.



Applications

Perfect choice for Hotels, Bars, Commercial & Residential Lighting.



Chrome Finish

10W VT-7018



SKU
3890 4000k Day White

EAN Code
3800157621083

Built In LED

EQ. Watts:	100W	Beam Angle:	120°
Voltage/Frequency:	220-240V, 50Hz	No. of LED:	90
Luminous Flux:	1350lm	Material :	Stainless steel + Metal +PMMA
LED Type:	SMD	Unit GW :	1.38KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	940 x 55 x 800mm



Chrome Finish


24W VT-7024



SKU
3891 4000k Day White

EAN Code
3800157621090

Built In LED

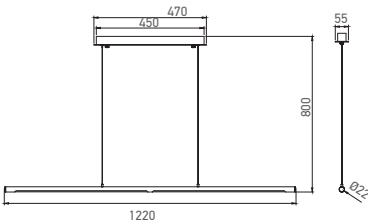

EQ. Watts:	130W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	120
Luminous Flux:	1800lm	Material :	Stainless steel+metal+PMMA
LED Type:	SMD	Unit GW :	1.59KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	1220 x 55 x 800mm




Chrome Finish

36W VT-7036



SKU
3892 4000k Day White

EAN Code
3800157621106 Built In LED

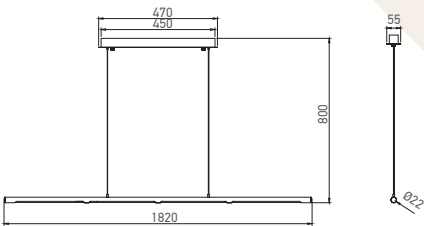

EQ. Watts:	200W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	180
Luminous Flux:	2700lm	Material :	Stainless steel+metal+PMMA
LED Type:	SMD	Unit GW :	1.82KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	1820 x 55 x 800mm




Chrome Finish

36W VT-7037



SKU
3893 4000k Day White

EAN Code
3800157621113 Built In LED



EQ. Watts:	200W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	180
Luminous Flux:	2700lm	Material :	Stainless steel+metal+PMMA
LED Type:	SMD	Unit GW :	2.24KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	940 x 120*60mm




Chrome Finish

8W VT-7008



SKU
3894 4000k Day White

EAN Code
3800157621120 Built In LED

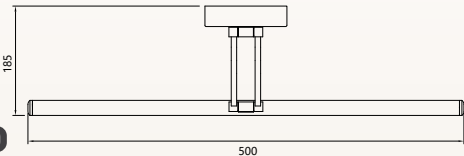

EQ. Watts:	50W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	40
Luminous Flux:	600	Material :	metal+PMMA
LED Type:	SMD	Unit GW :	0.72KG
CRI:	>80	Life Span:	20,000H
PF:	≥0.5	Size :	500 x 55 x 185mm




Chrome Finish

12W VT-7012



SKU
3895 4000k Day White

EAN Code
3800157621137 Built In LED

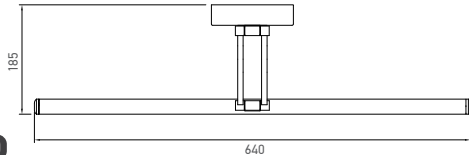

EQ. Watts:	70W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	60
Luminous Flux:	900lm	Material :	metal+PMMA
LED Type:	SMD	Unit GW :	0.82KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.5	Size :	640 x 55 x 185mm


**Chrome Finish****8W** VT-7009CH**A⁺**

SKU

3900 4000k Day White

EAN Code

3800157621854

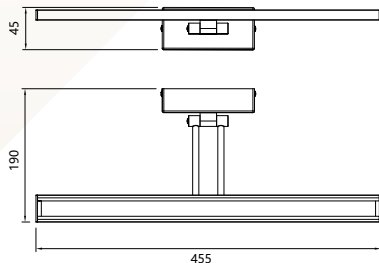Built In LED

EQ. Watts:		Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	40
Luminous Flux:	600lm	Material :	Stainless steel+aluminum+PMMA
LED Type:	SMD	Unit GW :	0.8
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	455 x 45 x 190mm


Gold Finish**8W** VT-7009**A⁺**

SKU

3901 4000k Day White

EAN Code

3800157621861

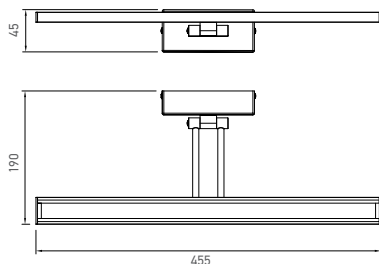Built In LED

EQ. Watts:		Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	40
Luminous Flux:	600lm	Material :	Stainless steel+aluminum+PMMA
LED Type:	SMD	Unit GW :	0.8
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	455 x 45 x 190mm




Chrome Finish
Ceiling Lamp

12W VT-7014



SKU
3902 4000k Day White

EAN Code
3800157621878 Built In LED



EQ. Watts:		Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	60
Luminous Flux:	900lm	Material :	Stainless steel+metal+PMMA
LED Type:	SMD	Unit GW :	1.08
CRI:	>80	Life Span:	20,000H
PF:	≥0.8	Size :	640 x 65 x65mm




Chrome Finish
Ceiling Lamp

18W VT-7021




SKU
3903 4000k Day White

EAN Code
3800157621885 Built In LED



EQ. Watts:		Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	90
Luminous Flux:	1350lm	Material :	Stainless steel+metal+PMMA
LED Type:	SMD	Unit GW :	1.28
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	940 x 65 x65mm

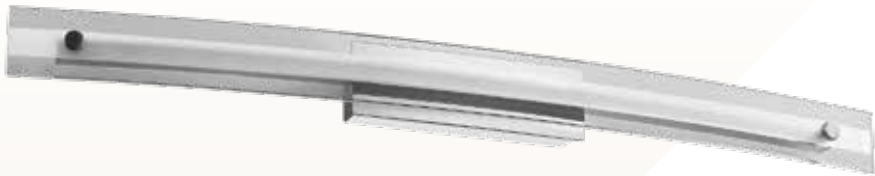


Glass Wall Fixture

12W VT-7013



SKU **Built In LED**
3896 4000k Day White

EAN Code
3800157621144

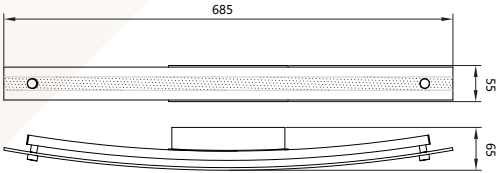

EQ. Watts:	70W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	60
Luminous Flux:	900lm	Material :	Stainless steel+metal+glass
LED Type:	SMD	Unit GW :	1.01KG
CRI:	>80	Life Span:	20,000H
PF:	≥0.8	Size :	685 x 55 x 65mm




Glass Wall Fixture

18W VT-7019



SKU **Built In LED**
3897 4000k Day White

EAN Code
3800157621151

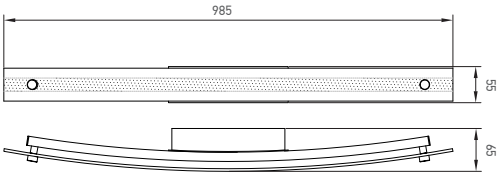

EQ. Watts:	100W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	90
Luminous Flux:	1350lm	Material :	Stainless steel+metal+glass
LED Type:	SMD	Unit GW :	1.50KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	985 x 55 x 65mm




Glass Hanging Pendant

18W VT-7020


A

SKU **Built In LED**
3898 4000k Day White

EAN Code
3800157621168

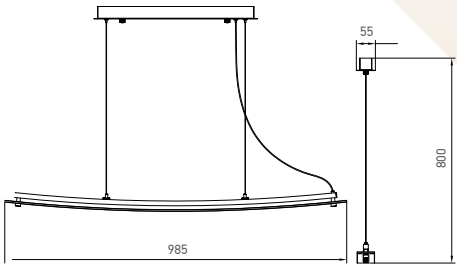

EQ. Watts:	100W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	90
Luminous Flux:	1350lm	Material :	Stainless steel+metal+glass
LED Type:	SMD	Unit GW :	1.98KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	985 x 55 x 800mm

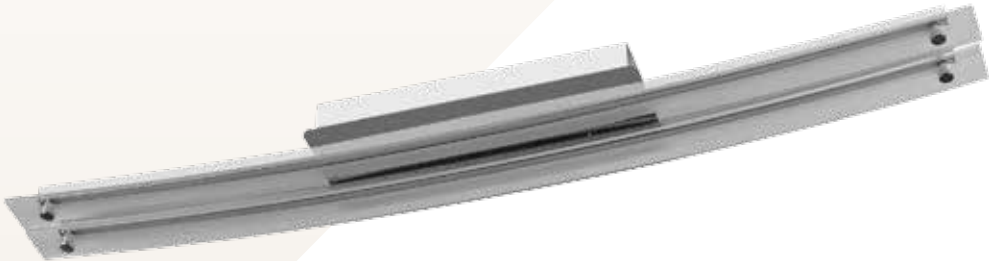

Glass Ceiling Surface SKU **Built In LED**
3899 4000k Day White

36W VT-7038



EAN Code
3800157621175




EQ. Watts:	200W	Beam Angle:	120°
Voltage/Frequency:	AC:220-240V,50Hz	No. of LED:	180
Luminous Flux:	2700lm	Material :	Stainless steel+metal+glass
LED Type:	SMD	Unit GW :	3.53KG
CRI:	>80	Life Span:	20,000h
PF:	≥0.8	Size :	985 x 120 x75mm



Modern Circular

Chandeliers

This V-TAC collection captures this same essence with a timeless elegance that is both subtle and pretty.

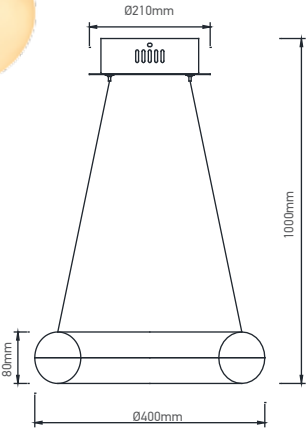

Soft Light Chandelier

40W VT-40-1




SKU
3874 3000k Warm White

EAN Code
3800157620888

Built In LED

EQ. Watts:	480W	Beam Angle:	120°
Voltage/Frequency:	AC100-240V/50HZ	No. of LED:	240pcs
Luminous Flux:	3300lm	Material :	Steel+PC
LED Type:	SMD-2835	Unit GW :	3.90kgs
CRI:	>80	Life Span:	20,000h
PF:	>0.9	Size :	L.400 x W.400 x H.1000mm

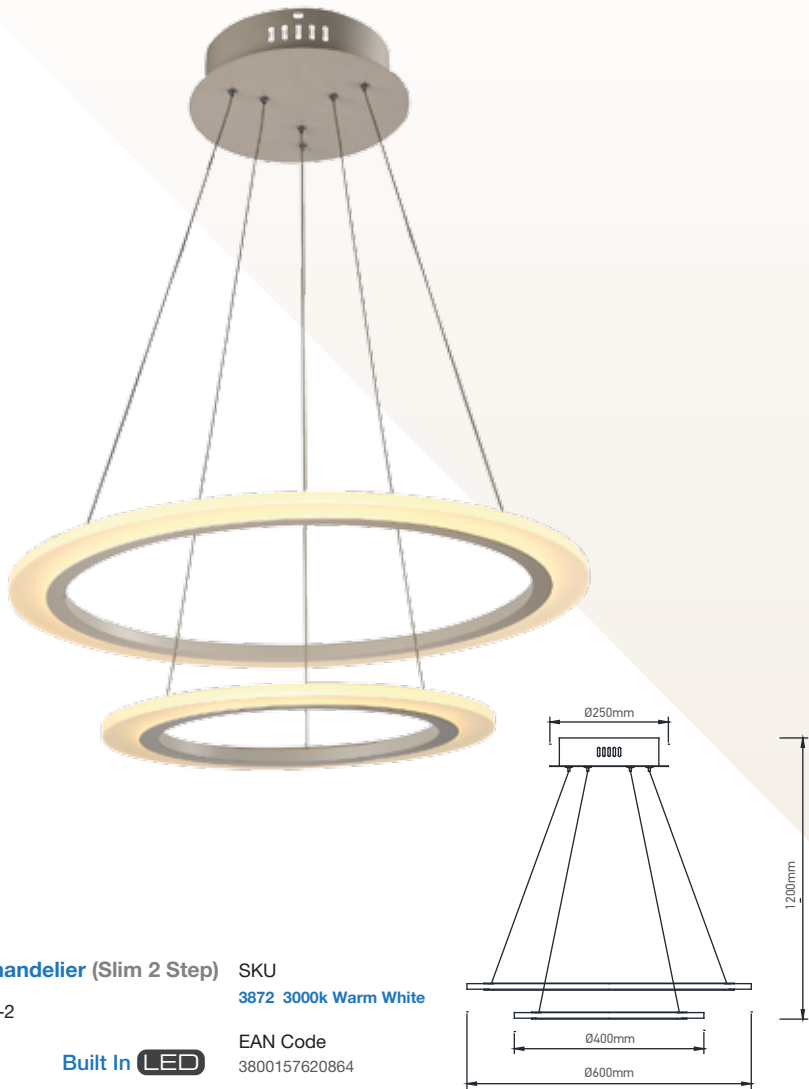


Soft Light Chandelier (Slim 2 Step) SKU
60W VT-60-2 **3872 3000k Warm White**



Built In LED

EAN Code
3800157620864

EQ. Watts:	300W	Beam Angle:	120°
Voltage/Frequency:	AC100-240V/50HZ	No. of LED:	340pcs
Luminous Flux:	5500lm	Material :	Acrylic+Aluminum+Steel
LED Type:	SMD-2835	Unit GW :	5.8kgs
CRI:	>80	Life Span:	20,000h
PF:	>0.9	Size :	L.600 x W.600 x H.1200mm

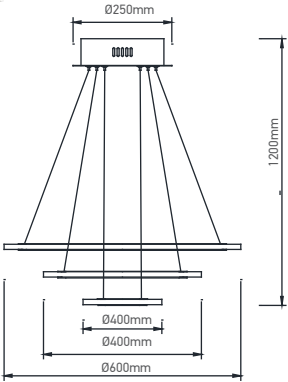



Soft Light Chandelier (Slim 3 Step) SKU
70W VT-70-3 3873 3000k Warm White



Built In **LED**

EAN Code
3800157620871

EQ. Watts:	350W	Beam Angle:	120°
Voltage/Frequency:	AC100-240V/50HZ	No. of LED:	360pcs
Luminous Flux:	6000lm	Material :	Acrylic+Aluminum+Steel
LED Type:	SMD-2835	Unit GW :	6.70kgs
CRI:	>80	Life Span:	20,000h
PF:	>0.9	Size :	L.600 x W.600 x H.1200mm

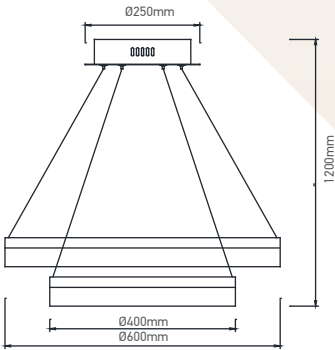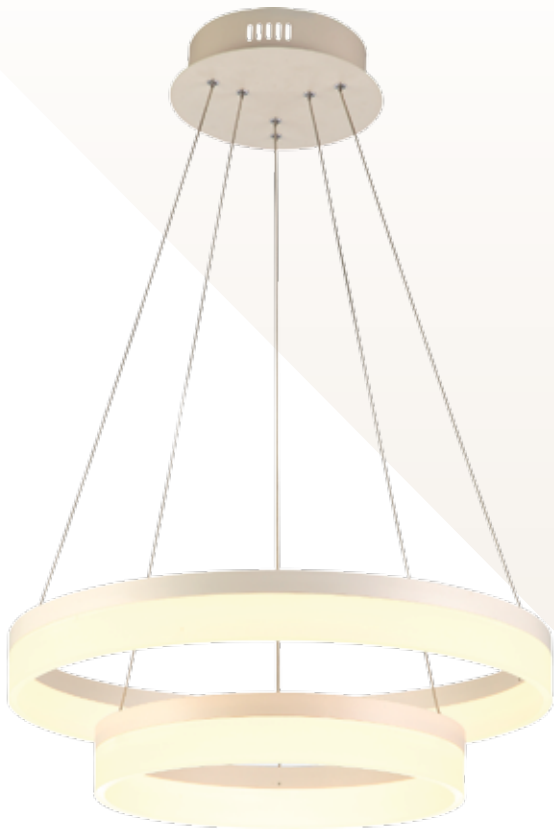

Soft Light Chandelier (2 Step)

70W VT-70-2





Built In LED

SKU
3870 3000k Warm White

EAN Code
3800157620840

EQ. Watts:	350W	Beam Angle:	120°
Voltage/Frequency:	AC:100-240V/50HZ	No. of LED:	420pcs
Luminous Flux:	5600lm	Material :	Acrylic+Aluminum+Steel
LED Type:	SMD	Unit GW :	6.30kgs
CRI:	>80	Life Span:	20,000h
PF:	>0.9	Size :	L.600 x W.600 x H.1200mm

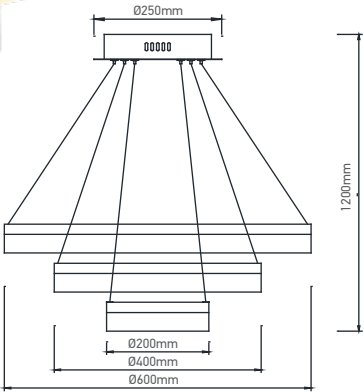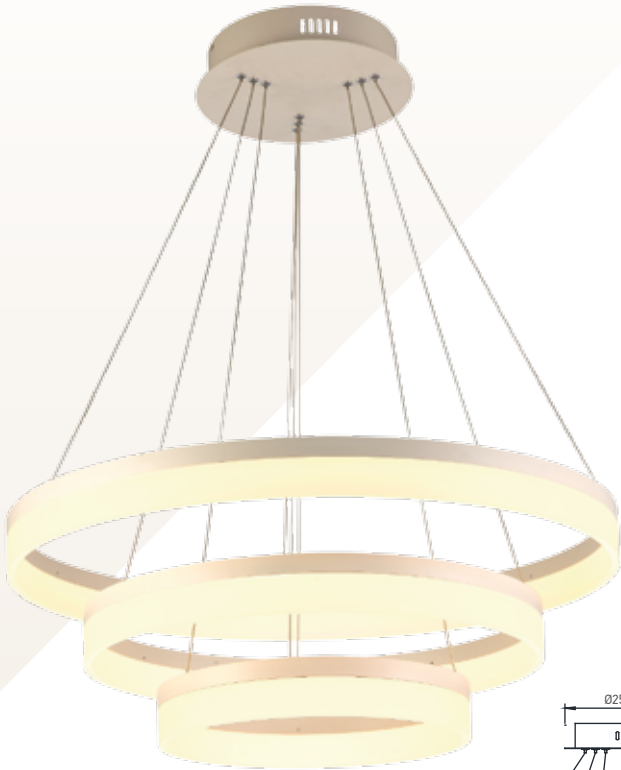

Soft Light Chandelier (3 Step)

80W VT-80-3



Built In LED

SKU
3871 3000k Warm White

EAN Code
3800157620857

EQ. Watts:	400W	Beam Angle:	120°
Voltage/Frequency:	AC:100-240V/50HZ	No. of LED:	510pcs
Luminous Flux:	5900lm	Material :	Acrylic+Aluminum+Steel
LED Type:	SMD	Unit GW :	7.30kgs
CRI:	>80	Life Span:	20,000h
PF:	>0.9	Size :	L.600 x W.600 x H.1200mm



Stylish Pendants

Includes all mounting hardware for quick and easy installation
and Filament vintage style bulb recommended (sold separately)



VT-7200


Matt Grey

SKU: 3822

EAN Code: 3800157616577

Material: Metal

Size: 200 x 270 x 1300mm

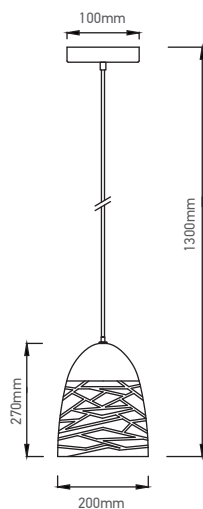




VT-7332

Black Metal Globe Mesh


SKU: 3859
EAN Code: 3800157620697
Material: Metal
Size: Ø290 x 100 x 1340mm

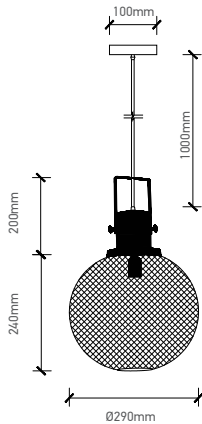

VT-7252

Black Metal V Shape

SKU: 3860
EAN Code: 3800157620703
Material: Metal
Size: Ø290 x 100 x 1340mm

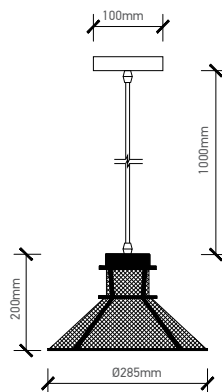

**bulbs not included*




VT-7200
Champagne Gold

SKU: 3821
EAN Code: 3800157616560
Material: Metal
Size: 200 x 270 x 1300mm



VT-7200
Matt White


SKU: 3823
EAN Code: 3800157616584
Material: Metal
Size: 200 x 270 x 1300mm

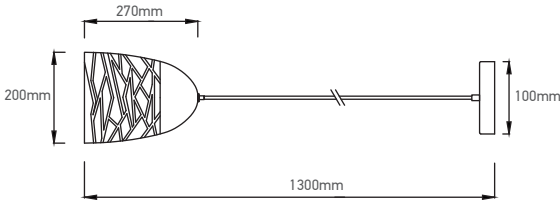




VT-7131
Champagne Gold

SKU: 3824
EAN Code: 3800157616591
Material: Metal
Size: 130 x 250 x 1300mm



VT-7131
Matt Black

SKU: 3825
EAN Code: 3800157616607
Material: Metal
Size: 130 x 250 x 1300mm




**bulbs not included*



VT-7131
Matt White

SKU: 3826
EAN Code: 3800157616614
Material: Metal
Size: 130 x 250 x 1300mm




*bulbs not included



VT-7132
Champagne Gold


SKU: 3827
EAN Code: 3800157616621
Material: Metal
Size: 130 x 220 x 1300mm






VT-7132
Matt Black

SKU: 3828
EAN Code: 3800157616638
Material: Metal
Size: 130 x 220 x 1300mm



VT-7132
Matt White

SKU: 3829
EAN Code: 3800157616645
Material: Metal
Size: 130 x 220 x 1300mm



**bulbs not included*

VT-7303


Amber Gobe Shape

SKU: 3866

EAN Code: 3800157620765

Material: Glass + Metal

Size: 300 x 280 x 1000mm

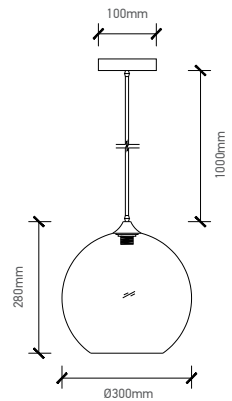




VT-7302

Transparent Globe Glass


SKU: 3865
EAN Code: 3800157620758
Material: Glass + Metal
Size: 300 x 280 x 1000mm

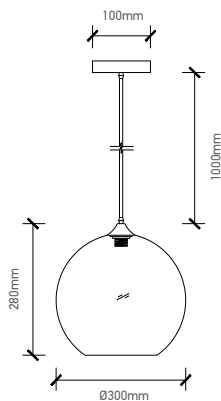

VT-7229

Transparent Artistic Shape

SKU: 3867
EAN Code: 3800157620772
Material: Glass + Metal
Size: 265 x 190 x 1000mm

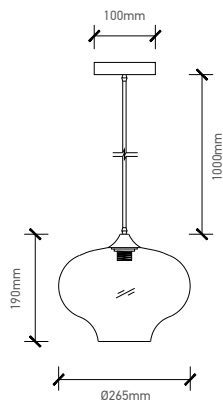


*bulbs not included



VT-7304

Double Glass- Amber + White


SKU: 3875
EAN Code: 3800157620932
Material: Glass + Metal
Size: 250 x 420 x 1000mm

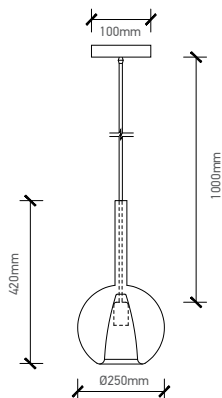

VT-7181

Double Glass- Amber + White

SKU: 3878
EAN Code: 3800157620963
Material: Glass + Metal
Size: 180 x 350 x 1000mm

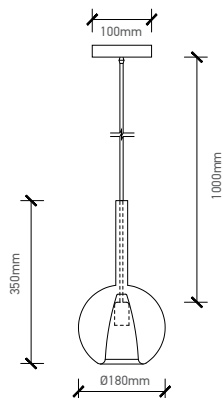




VT-7304

Double Glass- Gungrey+White


SKU: 3876
EAN Code: 3800157620949
Material: Glass + Metal
Size: 250 x 420 x 1000mm

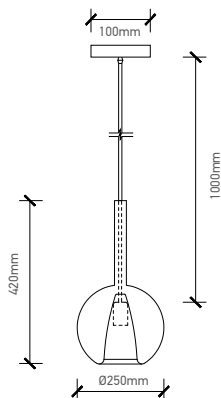

VT-7181

Double Glass- Gungrey+White

SKU: 3877
EAN Code: 3800157620956
Material: Glass + Metal
Size: 180 x 350 x 1000mm

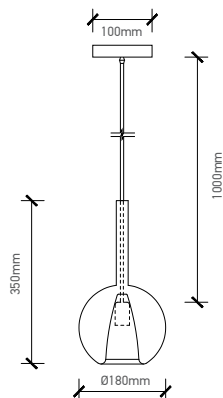

*bulbs not included



VT-7281
White Glass

SKU: 3884
EAN Code: 3800157621021
Material: Glass + Metal
Size: 285 x440 x1000mm






VT-7281
Black Glass

SKU: 3885
EAN Code: 3800157621038
Material: Glass + Metal
Size: 285 x440 x1000mm



VT-7281
Amber Glass


SKU: 3886
EAN Code: 3800157621045
Material: Glass + Metal
Size: 285 x440 x1000mm

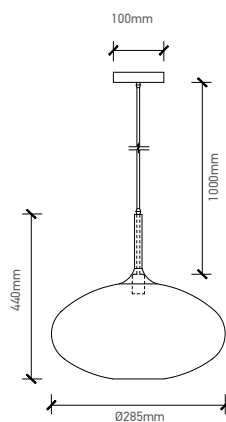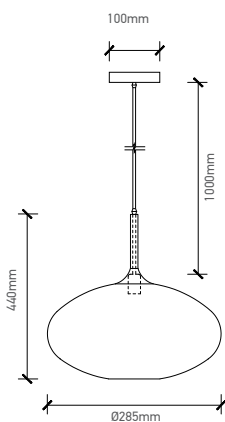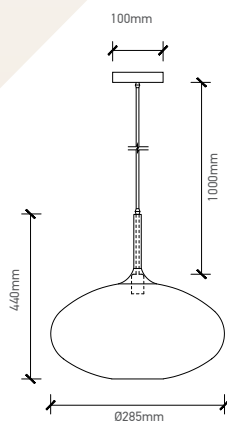




VT-7350
Huge Transparent

SKU: 3879
EAN Code: 3800157620970
Material: Glass + Metal
Size: 330 x 260 x 1000mm

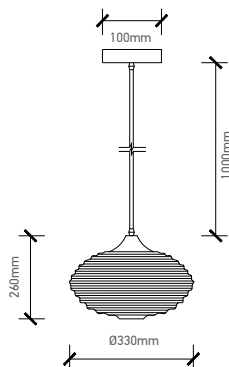

VT-7350
Huge Black

SKU: 3880
EAN Code: 3800157620987
Material: Glass + Metal
Size: 330 x 260 x 1000mm

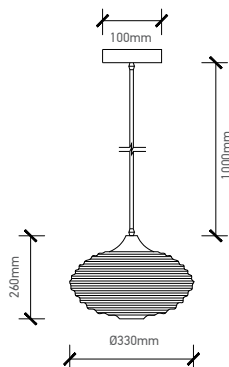

**bulbs not included*

VT-7305

Cone Shape- Bulb Down

SKU:3881

EAN Code:3800157620994

Material:xxxx

Size:Ø

VT-7254

Round Shape- Bulb Down

SKU:3882

EAN Code:3800157621007

Material:xxxx

Size:Ø



VT-7306

Transparent chrome

3 wire suspension

SKU: 3883

EAN Code: 3800157621014

Material: Glass


Size: Ø



VT-7292

Gun Grey- 3 wire suspension


SKU: 3887
EAN Code: 3800157621052
Material: Glass
Size: 300 x 265 x 1000mm

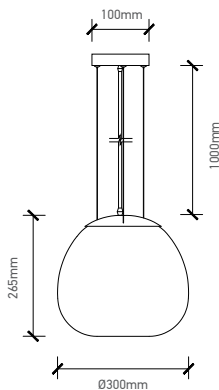

VT-7380

Gun Grey- 3 wire suspension

SKU: 3888
EAN Code: 3800157621069
Material: Glass
Size: 380 x 330 x 1000mm

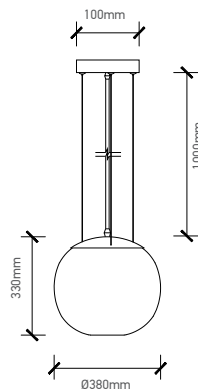




VT-7210

Transparent Glass


SKU: 3730
EAN Code: 3800157611039
Material: Glass + Metal
Size: 245 x 230 x 1100mm



VT-7140

Amber Glass

SKU: 3736
EAN Code: 3800157611091
Material: Glass + Metal
Size: 140 x 240 x 1130mm






VT-7140

Transparent Glass


SKU: 3735
EAN Code: 3800157611084
Material: Glass + Metal
Size: 140 x 240 x1130mm



VT-7185

Transparent Glass

SKU: 3738
EAN Code: 3800157611114
Material: Glass + Metal
Size: 180 x 230 x1110mm






VT-7250

Transparent Glass


SKU: 3739
EAN Code: 3800157611121
Material: Glass + Metal
Size: 250 x 330 x 1220mm



VT-7290

Amber Glass

SKU: 3741
EAN Code: 3800157611145
Material: Glass + Metal
Size: 260 x 260 x 1150mm


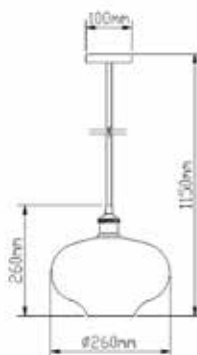


**bulbs not included*




VT-7300
Transparent Glass

SKU: 3737
EAN Code: 3800157611107
Material: Glass + Metal
Size: 300 x 250 x 1150mm

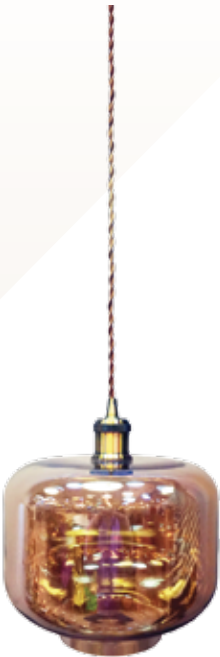

VT-7320
Amber Glass


SKU: 3740
EAN Code: 3800157611138
Material: Glass + Metal
Size: 250 x 280 x 1180mm






VT-7150
Amber Glass

SKU: 3732
EAN Code: 3800157611053
Material: Glass + Metal
Size: 145 x 160 x 1050mm



VT-7150
Green Glass


SKU: 3734
EAN Code: 3800157611077
Material: Glass + Metal
Size: 145 x 160 x 1050mm






VT-7150
Red Glass

SKU: 3731
EAN Code: 3800157611046
Material: Glass + Metal
Size: 145 x 160 x 1050mm



VT-7150
Clear Glass

SKU: 3733
EAN Code: 3800157611060
Material: Glass + Metal
Size: 145 x 160 x 1050mm






VT-7220
Transparent Glass

SKU: 3727
EAN Code: 3800157611008
Material: Glass + Metal
Size: 220 x 280 x 1150mm



VT-7220
Amber Glass

SKU: 3726
EAN Code: 3800157610995
Material: Glass + Metal
Size: 220 x 280 x 1150mm




*bulbs not included



VT-7422
Black

SKU: 3728
EAN Code: 3800157611015
Material: Aluminum
Size: 230 x 310x 1150mm




*bulbs not included




VT-7422
White

SKU: 3729
EAN Code: 3800157611022
Material: Aluminum
Size: 230 x 310x 1150mm




**VT-7142****Transparent Cone Shape**

SKU: 3861
EAN Code: 3800157620710
Material: Glass + Metal
Size: 140 x 160mm

**VT-7143****Transparent V Shape**

SKU: 3862
EAN Code: 3800157620727
Material: Glass + Metal
Size: 185 x 140mm






VT-7180

Transparent V Shape


SKU: 3863
EAN Code: 3800157620734
Material: Glass + Metal
Size:



VT-7226

Transparent Globe Shape

SKU: 3864
EAN Code: 3800157620741
Material: Glass + Metal
Size: 350 x 230mm






VT-7130

Transparent Glass


SKU: 3818
EAN Code: 3800157615433
Material: Glass + Wood
Size: 135 x 240 x 1150mm

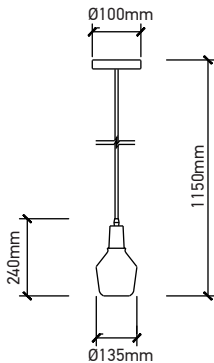

VT-7170

Transparent Glass

SKU: 3819
EAN Code: 3800157615440
Material: Glass + Wood
Size: 165 x 220 x 1100mm

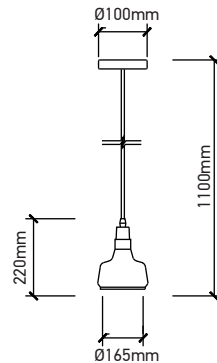

**bulbs not included*




3D Glass

VT-7015

Glass


SKU: 3830
EAN Code: 3800157616652
Material: Glass
Size: 150 x 140 x 1200mm

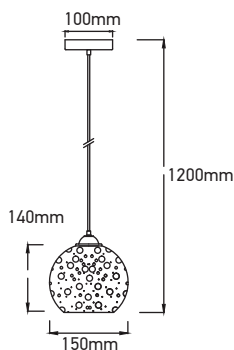

VT-7240

Transparent Glass

SKU: 3820
EAN Code: 3800157615457
Material: Glass + Wood
Size: 235 x 140 x 1050mm

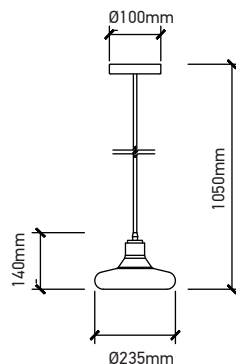



VT-7400
Modern 6 Bulb Chandelier -Movable

SKU: 3889
EAN Code: 3800157621076
Material: Metal
Size: Ø

100mm

1000mm

200mm

Ø285mm

**bulbs not included*

LED Pendants | Copper Series



VT-8300

Rose Gold

SKU: 3710
EAN Code: 3800157610834
Material: Iron with Electric
Copper Paint
Size: Ø300mm





VT-8150
Rose Gold

SKU: 3713
EAN Code: 3800157610865
Material: Iron with Electric Copper Paint
Size: Ø150mm



VT-8220
Rose Gold

SKU: 3711
EAN Code: 3800157610841
Material: Iron with Electric Copper Paint
Size: Ø220mm



*bulbs not included



VT-8150
Chrome

SKU: 3712
EAN Code: 3800157610865
Material: Iron with Electric Copper Paint
Size: Ø150mm



VT-8255
Rose Gold

SKU: 3709
EAN Code: 3800157610827
Material: Iron with Electric Copper Paint
Size: Ø250mm





VT-8180
Chrome

SKU: 3707
EAN Code: 3800157610803
Material: Iron with Electric
Copper Paint
Size: Ø180mm



VT-8180
Rose Gold

SKU: 3708
EAN Code: 3800157610810
Material: Iron with Electric
Copper Paint
Size: Ø180mm



*bulbs not included



VT-8170
Rose Gold

SKU: 3714
EAN Code: 3800157610872
Material: Iron with Electric Copper Paint
Size: Ø170mm



VT-8230
Rose Gold

SKU: 3715
EAN Code: 3800157610889
Material: Iron with Electric Copper Paint
Size: Ø230mm



*bulbs not included



VT-8175
Chrome

SKU: 3705
EAN Code: 3800157610780
Material: Iron with Electric
Copper Paint
Size: Ø170mm



VT-8175
Rose Gold

SKU: 3706
EAN Code: 3800157610797
Material: Iron with Electric
Copper Paint
Size: Ø170mm





VT-8200
Rose Gold

SKU: 3716
EAN Code: 3800157610896
Material: Iron with Electric
Copper Paint
Size: Ø200mm



VT-8250
Rose Gold

SKU: 3717
EAN Code: 3800157610902
Material: Iron with Electric
Copper Paint
Size: Ø250mm






VT-7205

White Glass

SKU:	3759
EAN Code:	3800157611329
Material:	Glass + Wood
Size:	190 x 320 x 1120mm

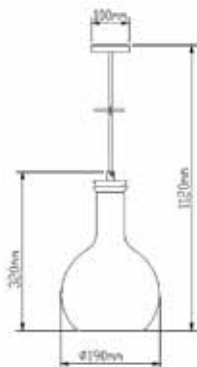


*bulbs not included




VT-7115
White Glass

SKU: 3758
EAN Code: 3800157611312
Material: Glass + Wood
Size: 170 x 320 x 1120mm



VT-7177
Clear Glass


SKU: 3760
EAN Code: 3800157611336
Material: Glass + Wood
Size: 170 x 320 x 1120mm






VT-7162
White

SKU: 3868
EAN Code: 3800157620789
Material: Aluminum
Size: Ø160 x350 x600mm



VT-7162
Black

SKU: 3869
EAN Code: 3800157620796
Material: Aluminum
Size: Ø160 x350 x600mm




**bulbs not included*



VT-7330


SKU: 3849
EAN Code: 3800157618984
Material: Concrete and Iron
Size: 400 x 250 x 1100mm






VT-7253

SKU: 3848
EAN Code: 3800157618977
Material: Concrete and Iron
Size: 250 x 310 x 1200mm



VT-7121

SKU: 3847
EAN Code: 3800157618960
Material: Concrete and Iron
Size: 120 x 380 x 1300mm




**bulbs not included*



VT-7155


SKU: 3850
EAN Code: 3800157618991
Material: Concrete
Size: 160 x 290 x 1250mm






VT-7202

SKU: 3853
EAN Code: 3800157619028
Material: Concrete
Size: 180 x 160 x 1100mm

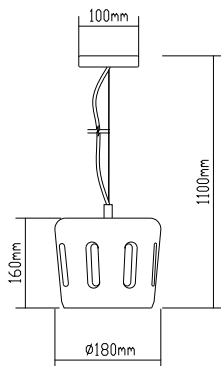

VT-7291


SKU: 3854
EAN Code: 3800157619035
Material: Concrete with Wood
Size: 265 x 260 x 1050mm

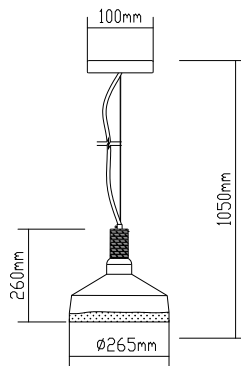


**bulbs not included*

**VT-7132****White**

SKU: 3858
EAN Code: 3800157619073
Material: Concrete with Wood
Size: 290 x 250 x 1150mm

**VT-7125****Grey**

SKU: 3855
EAN Code: 3800157619042
Material: Concrete with Wood
Size: 120 x 210 x 1080mm


**bulbs not included*



VT-7125

Green


SKU: 3856
EAN Code: 3800157619059
Material: Concrete with Wood
Size: 120 x 210 x 1080mm



VT-7125

Red


SKU: 3857
EAN Code: 3800157619066
Material: Concrete with Wood
Size: 120 x 210 x 1080mm






VT-7160

SKU: 3851
EAN Code: 3800157619004
Material: Concrete
Size: 160 x 150 x 2000mm



VT-7171

SKU: 3852
EAN Code: 3800157619011
Material: Concrete
Size: 180 x 130 x 2000mm






VT-7141

Champagne Gold


SKU: 3831
EAN Code: 3800157616669
Material: Metal
Size: 250 x 190 x 1250mm

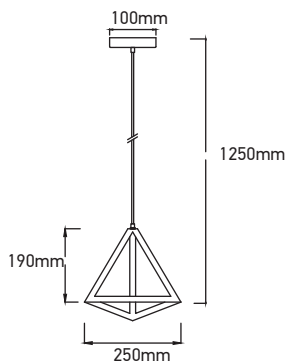

VT-7141

Matt Black

SKU: 3832
EAN Code: 3800157616676
Material: Metal
Size: 250 x 190 x 1250mm

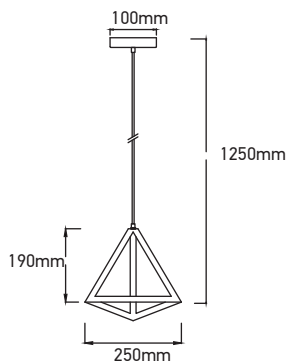


**bulbs not included*



VT-7161

Champagne Gold


SKU: 3833
EAN Code: 3800157616683
Material: Metal
Size: 225 x 225x 1250mm

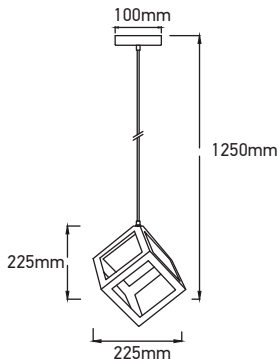

VT-7161

Matt Black

SKU: 3834
EAN Code: 3800157616690
Material: Metal
Size: 225 x 225x 1250mm

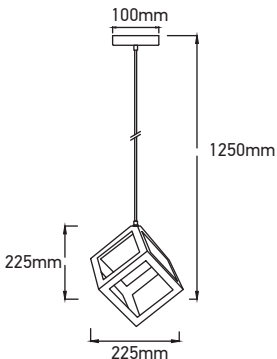




VT-7320

Champagne Gold


SKU: 3835
EAN Code: 3800157616706
Material: Metal
Size: 320 x 320x 1350mm

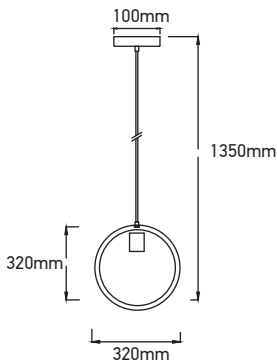

VT-7320

Matt Black

SKU: 3836
EAN Code: 3800157616713
Material: Metal
Size: 320 x 320x 1350mm

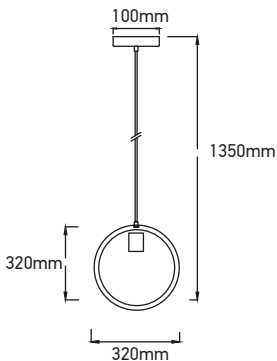


*bulbs not included



VT-7321

Champagne Gold


SKU: 3837
EAN Code: 3800157616720
Material: Metal
Size: 320 x 320x 1350mm

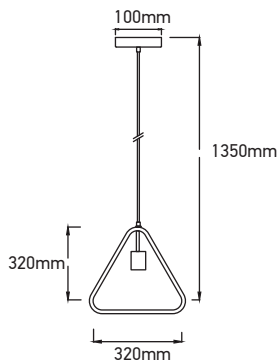

VT-7321

Matt Black


SKU: 3838
EAN Code: 3800157616737
Material: Metal
Size: 320 x 320x 1350mm

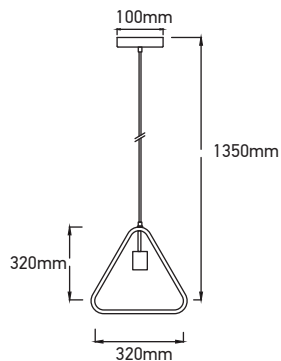




VT-7225
Red Bronze

SKU: 3816
EAN Code: 3800157612760
Material: Aluminum+ Sand finish
Size: 260 x 330 x 1100 mm



VT-7340
Red Bronze

SKU: 3817
EAN Code: 3800157612777
Material: Aluminum+ Sand finish
Size: 360 x 420 x 1200mm



**bulbs not included*



VT-7520


Sand Black

SKU: 3700

EAN Code: 3800157610735

Material: Aluminum + Sand finish


Size: 220 x 310 x 1375mm






VT-7520
Sand Grey

SKU: 3701
EAN Code: 3800157610742
Material: Aluminum + Sand finish
Size: 220 x 310 x 1375mm



VT-7520
Sand White

SKU: 3702
EAN Code: 3800157610759
Material: Aluminum + Sand finish
Size: 220 x 310 x 1375mm




**bulbs not included*



VT-7425

White


SKU: 3756
EAN Code: 3800157611299
Material: Aluminum + Wooden Top
Size: 250 x 200x 1100mm

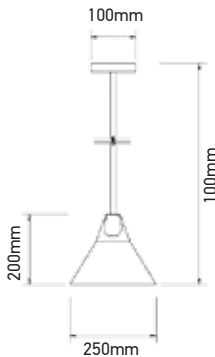

VT-7425

Black

SKU: 3757
EAN Code: 3800157611305
Material: Aluminum + Wooden Top
Size: 250 x 200x 1100mm

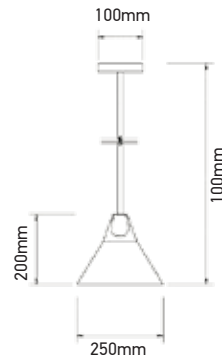




VT-7525

White


SKU: 3761
EAN Code: 3800157611343
Material: Iron + Wooden Top
Size: 250 x 400x 1200mm



VT-7525

Black

SKU: 3762
EAN Code: 3800157611350
Material: Iron + Wooden Top
Size: 250 x 400x 1200mm

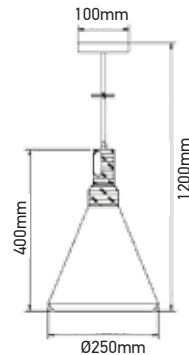


*bulbs not included




VT-7535
White

SKU: 3763
EAN Code: 3800157611367
Material: Iron + Wooden Top
Size: 350 x 300x 1100mm

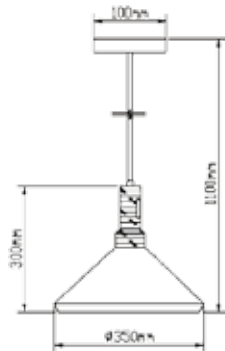

VT-7535
Black


SKU: 3764
EAN Code: 3800157611374
Material: Iron + Wooden Top
Size: 350 x 300x 1100mm

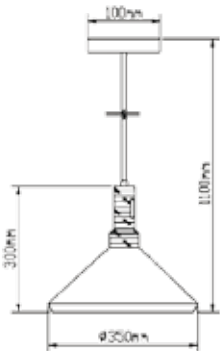




VT-7545
White

SKU: 3765
EAN Code: 3800157611381
Material: Iron + Wooden Top
Size: 350 x 300x 1100mm



VT-7545
Black

SKU: 3766
EAN Code: 3800157611398
Material: Iron + Wooden Top
Size: 350 x 300x 1100mm




*bulbs not included




VT-7777
Rose Gold

SKU: 3751
EAN Code: 3800157611244
Material: Metal
Size: 300 x 90x 1000mm



VT-7777
Matt Gold


SKU: 3752
EAN Code: 3800157611251
Material: Metal
Size: 300 x 90x 1000mm






VT-7424
Black

SKU: 3753
EAN Code: 3800157611268
Material: Metal
Size: 360 x 170x 1080mm

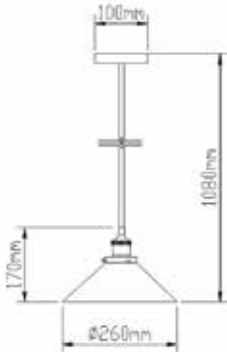


Adjustable
Height

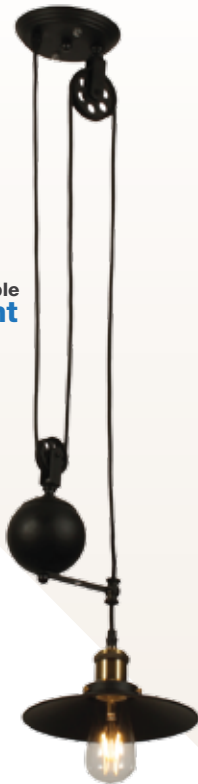

VT-7201
Black

SKU: 3845
EAN Code: 3800157617192
Material: Metal
Size: 220 x 140x 600-1600mm




**bulbs not included*




VT-7251
Globe Pendant

SKU: 3839
EAN Code: 3800157616744
Material: Acrylic glass
Size: 250 x 250x 1300mm

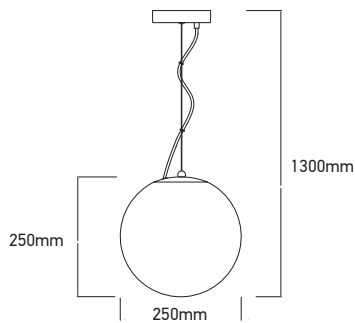

VT-7118
Rope

SKU: 3754
EAN Code: 3800157611275
Material: Rope
Size: 45x 57x 1500mm





VT-7558
Green

SKU: 3767
EAN Code: 3800157611404
Material: Glass
Size: Ø72 x 280x 1150mm



VT-7558
Blue

SKU: 3768
EAN Code: 3800157611411
Material: Glass
Size: Ø72 x 280x 1150mm




VT-7558
Red

SKU: 3769
EAN Code: 3800157611428
Material: Glass
Size: Ø72 x 280x 1150mm



VT-7558
Amber

SKU: 3770
EAN Code: 3800157611435
Material: Glass
Size: Ø72 x 280x 1150mm



VT-7558
Transparent

SKU: 3771
EAN Code: 3800157611442
Material: Glass
Size: Ø72 x 280x 1150mm



VT-7558

Pink

SKU: 3772

EAN Code: 3800157611459

Material: Glass

Size: Ø72 x 280x 1150mm



VT-7558

Yellow

SKU: 3773

EAN Code: 3800157611466

Material: Glass

Size: Ø72 x 280x 1150mm



VT-7558

Rose

SKU: 3774

EAN Code: 3800157611473

Material: Glass

Size: Ø72 x 280x 1150mm



VT-7558


Grey

SKU: 3775

EAN Code: 3800157611480

Material: Glass

Size: Ø72 x 280x 1150mm



VT-7558

Brown

SKU: 3776

EAN Code: 3800157611497


Material: Glass

Size: Ø72 x 280x 1150mm




VT-7555
Red Bronze

SKU: 3840
EAN Code: 3800157617147
Base: E27
Size: Ø50x90x900mm



VT-7555
Brown Bronze

SKU: 3841
EAN Code: 3800157617154
Base: E27
Size: Ø50x90x900mm





VT-7555
Brass Bronze

SKU: 3842
EAN Code: 3800157617161
Base: E27
Size: Ø50x90x900mm




VT-7555
Bronze

SKU: 3843
EAN Code: 3800157617178
Base: E27
Size: Ø50x90x900mm



VT-7555
Gold

SKU: 3844
EAN Code: 3800157617185
Base: E27
Size: Ø50x90x900mm





VT-7998
White

SKU: 3803
EAN Code: 3800157612340
Base: E27
Size: Ø47x64x680mm




VT-7998
Black

SKU: 3804
EAN Code: 3800157612357
Base: E27
Size: Ø47x64x680mm



VT-7998
Green

SKU: 3805
EAN Code: 3800157612364
Base: E27
Size: Ø47x64x680mm

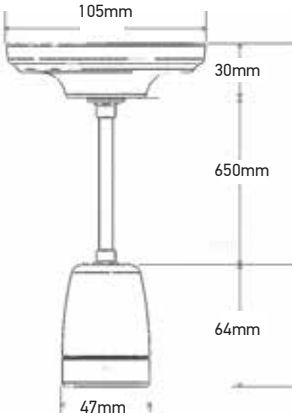



VT-7998
Blue

SKU: 3806
EAN Code: 3800157612371
Base: E27
Size: Ø47x64x680mm




VT-7998
Red

SKU: 3807
EAN Code: 3800157612388
Base: E27
Size: Ø47x64x680mm



VT-7998
Grey

SKU: 3808
EAN Code: 3800157612395
Base: E27
Size: Ø47x64x680mm

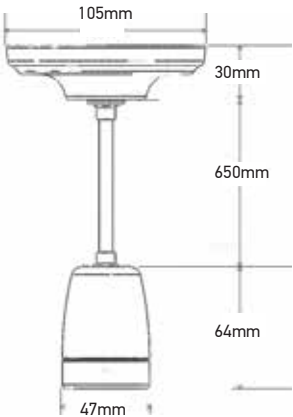




VT-7998
Yellow

SKU: 3809
EAN Code: 3800157612401
Base: E27
Size: Ø47x64x680mm



VT-7998
Brown

SKU: 3810
EAN Code: 3800157612418
Base: E27
Size: Ø47x64x680mm

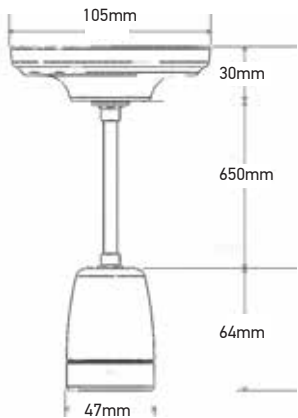



VT-799

White

SKU: 3795
EAN Code: 3800157612265
Base: E27
Size: Ø47x64mm



VT-799

Black


SKU: 3796
EAN Code: 3800157612272
Base: E27
Size: Ø47x64mm



VT-799

Green

SKU: 3797
EAN Code: 3800157612289
Base: E27
Size: Ø47x64mm





VT-799

Blue

SKU: 3798
EAN Code: 3800157612296
Base: E27
Size: Ø47x64mm



VT-799

Red


SKU: 3799
EAN Code: 3800157612302
Base: E27
Size: Ø47x64mm



VT-799

Grey

SKU: 3800
EAN Code: 3800157612319
Base: E27
Size: Ø47x64mm





VT-799

Yellow


SKU: 3801
EAN Code: 3800157612326
Base: E27
Size: Ø47x64mm



VT-799

Brown

SKU: 3802
EAN Code: 3800157612333
Base: E27
Size: Ø47x64mm





VT-7778
White Wire



SKU: 3720
EAN Code: 3800157610933
Material: Wooden
Size: Ø73 x 102x 100mm

VT-7778
Black Wire

SKU: 3721
EAN Code: 3800157610940
Material: Wooden
Size: Ø73 x 102x 100mm

VT-7778
Blue Wire

SKU: 3722
EAN Code: 3800157610957
Material: Wooden
Size: Ø73 x 102x 100mm

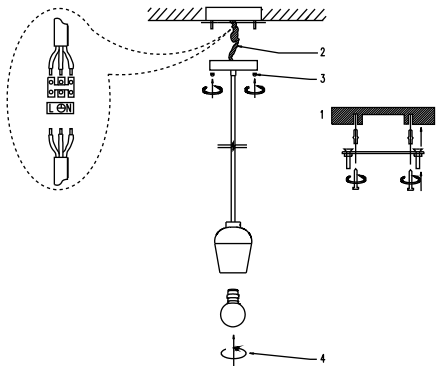



VT-7778
Red Wire

SKU: 3723
EAN Code: 3800157610964
Material: Wooden
Size: Ø73 x 102x 100mm





VT-7778
Purple Wire

SKU: 3724
EAN Code: 3800157610971
Material: Wooden
Size: Ø73 x 102x 100mm



VT-7778
Green Wire

SKU: 3725
EAN Code: 3800157610988
Material: Wooden
Size: Ø73 x 102x 100mm

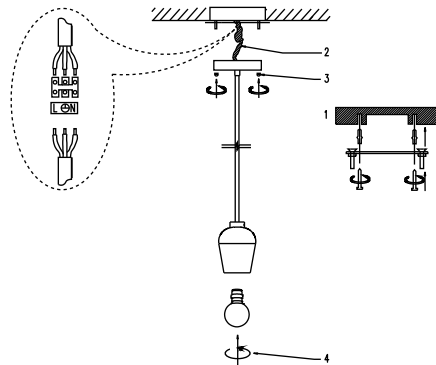



VT-7668
Green

SKU: 3742
EAN Code: 3800157611152
Base: E27
Size: Ø50x95x1050mm






VT-7668
Red

SKU: 3743
EAN Code: 3800157611169
Base: E27
Size: Ø50x95x1050mm



VT-7668
Blue

SKU: 3744
EAN Code: 3800157611176
Base: E27
Size: Ø50x95x1050mm





VT-7668
Yellow

SKU: 3745
EAN Code: 3800157611183
Base: E27
Size: Ø50x95x1050mm






VT-7668
White

SKU: 3746
EAN Code: 3800157611190
Base: E27
Size: Ø50x95x1050mm



VT-7668
Black

SKU: 3747
EAN Code: 3800157611206
Base: E27
Size: Ø50x95x1050mm





VT-7668
Grey

SKU: 3748
EAN Code: 3800157611213
Base: E27
Size: Ø50x95x1050mm






VT-7668
Brown


SKU: 3749
EAN Code: 3800157611220
Base: E27
Size: Ø50x95x1050mm



VT-7668
Beige

SKU: 3750
EAN Code: 3800157611237
Base: E27
Size: Ø50x95x1050mm





VT-7999


Gold Aluminum

SKU: 3811

EAN Code: 3800157612425

Base: E27

Size: Ø50 x 100mm



VT-7999


Gold Aluminum

SKU: 3812

EAN Code: 3800157612432

Base: E27

Size: Ø50 x 100mm



VT-7999

Bronze Aluminum

SKU: 3813


EAN Code: 3800157612449

Base: E27

Size: Ø50 x 100mm




**Adjustable
Canopy**

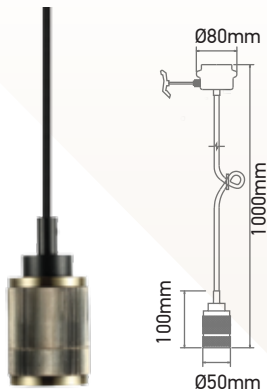

VT-7999
Bronze Aluminum

SKU: 3814
EAN Code: 3800157612456
Base: E27
Size: Ø50 x 100mm

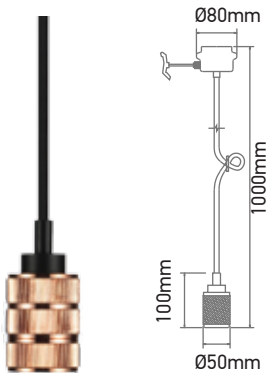

VT-7999
Rose Gold Aluminum

SKU: 3815
EAN Code: 3800157612463
Base: E27
Size: Ø50 x 100mm





VT-7338

White

SKU: 3755
EAN Code: 3800157611282
Base: E27
Size: Ø39x 60mm



VT-7338

Black

SKU: 3782
EAN Code: 3800157611558
Base: E27
Size: Ø39x 60mm



VT-7338

Blue

SKU: 3783
EAN Code: 3800157611565
Base: E27
Size: Ø39x 60mm



VT-7338

Brown

SKU: 3784
EAN Code: 3800157611572
Base: E27
Size: Ø39x 60mm



VT-7338

Green

SKU: 3785
EAN Code: 3800157611589
Base: E27
Size: Ø39x 60mm

**VT-7338****Grey****SKU:** 3786**EAN Code:** 3800157611596**Base:** E27**Size:** Ø39x 60mm**VT-7338****Light Blue****SKU:** 3787**EAN Code:** 3800157611602**Base:** E27**Size:** Ø39x 60mm**VT-7338****Orange****SKU:** 3788**EAN Code:** 3800157611619**Base:** E27**Size:** Ø39x 60mm**VT-7338****Pink****SKU:** 3789**EAN Code:** 3800157611626**Base:** E27**Size:** Ø39x 60mm**VT-7338****Purple****SKU:** 3790**EAN Code:** 3800157611633**Base:** E27**Size:** Ø39x 60mm



VT-7338
Red

SKU: 3791
EAN Code: 3800157611640
Base: E27
Size: Ø39x 60mm



VT-7338
Rose Red

SKU: 3792
EAN Code: 3800157611657
Base: E27
Size: Ø39x 60mm



VT-7338
Yellow

SKU: 3793
EAN Code: 3800157611664
Base: E27
Size: Ø39x 60mm



VT-7338
Beige

SKU: 3794
EAN Code: 3800157611671
Base: E27
Size: Ø39x 60mm



VT-7448
Rose Gold Set

SKU: 3777
EAN Code: 3800157611503
Base: E27
Size: Ø39x 60mm



VT-7228

Brown

SKU: 3475
EAN Code: 3800157607919
Base: E27
Length: 1000mm



VT-7228

Blue

SKU: 3476
EAN Code: 3800157607926
Base: E27
Size: 1000mm



VT-7228

White

SKU: 3477
EAN Code: 3800157607933
Base: E27
Length: 1000mm



VT-7228

Black

SKU: 3478
EAN Code: 3800157607940
Base: E27
Size: 1000mm



VT-7228

Pink

SKU: 3479

EAN Code: 3800157607957

Base: E27

Length: 1000mm



VT-7228

Red

SKU: 3480

EAN Code: 3800157607964

Base: E27

Size: 1000mm



VT-7228

Grey

SKU: 3481

EAN Code: 3800157607971

Base: E27

Length: 1000mm



VT-7228

Light Blue

SKU: 3482

EAN Code: 3800157609463

Base: E27

Size: 1000mm



VT-7228

Purple

SKU: 3483
EAN Code: 3800157609470
Base: E27
Length: 1000mm



VT-7228

Orange

SKU: 3484
EAN Code: 3800157609487
Base: E27
Size: 1000mm



VT-7228

Yellow

SKU: 3485
EAN Code: 3800157609494
Base: E27
Length: 1000mm



VT-7228

Green

SKU: 3486
EAN Code: 3800157609500
Base: E27
Size: 1000mm



Europe Office

1, Iliansko Shanssee Blvd,
Sofia 1220, Bulgaria
www.v-tac.eu

UK Office

Unit No. 9, Armstrong Way,
Western Industrial Park,
Southall, London,
UB24SD, UK.
www.v-tac.co.uk

Middle East Office

Unit# 407/8/9 Jumeirah
Bay Towers,
Plot# X3, JLT,
P.O. Box 45244, Dubai.
www.vtacexports.com

Showrooms

Vienna

Seilergasse 4,
1010 Wien, Vienna.
Austria.

Bucharest

Bulevardul Unirii, numărul 33
(vis-a-vis de Institutul
Bancar Român) Romania.

Budapest

Magyarország, 1138
Budapest, Népfürdő utca 13,
Hungary.

Paris

45Avenue Victor
Hugo a AUBERVILLIERS
(Seine Saint-Denis).
Paris-France.

Frankfurt

Mainzer Landstraße 275,
60326 Frankfurt, Germany

Birmingham

Unit 1, Ground Floor
Left Hand Side,
32-34 Constitution Hill,
Hockley, Birmingham,
B19 3JT. UK