



- 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
- Outputs max. 4MP (2688 × 1520) @30 fps
- H.265 codec, high compression rate, low bit rate
- Built-in IR LED, max. IR distance: 50 m
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- Intelligent detection: Intrusion, tripwire (support the classification and accurate detection of vehicle and human)
- Abnormality detection: Motion detection, video tampering, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- Supports max. 256 G Micro SD card, built-in Mic · 12V DC/POE power supply
- IP67 protection
- SMD Plus

THC4IPDAI

4MP IR Fixed focal Eyeball Ai Network Camera



Funzioni

SMD Plus

With intelligent algorithm, Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Perimeter Protection

With deep learning algorithm, Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, fast moving, parking detection, loitering detection and gathering detection) are largely reduced.

Starlight

Starlight technology mainly applies to the environment of low illumination, and it can provide clear colorful video. Even in the environment of min. illumination, the technology can guarantee the good image effect.

WDR

With advanced Wide Dynamic Range (WDR) technology, network camera provides clear details in the environment of strong brightness contrast. The bright and dark area can get clear video even in high brightness environment or with backlight shadow.

Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.


Caratteristiche tecniche

Camera	
Image Sensor	1/3" 4Megapixel progressive CMOS
Max. Resolution	2688 (H) × 1520 (V)
ROM	128 MB
RAM	512 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100000 s
Min. Illumination	0.005 Lux@F1.6
S/N Ratio	> 56 dB
Illumination Distance	50 m (164.0 ft)
Illuminator On/Off Control	Auto/Manual
Illuminator Number	2 (IR LED)
Pan/Tilt/Rotation Range	Pan: 0°–360°; Tilt: 0°–78°; Rotation: 0°–360°
Lens	
Lens Type	Fixed-focal
Mount Type	M12
Focal Length	3.6 mm

Max. Aperture	F1.6			
Field of View	2.8 mm: Horizontal:103°; vertical: 55°; diagonal: 122° 3.6 mm: Horizontal:84°; vertical: 45° ; diagonal: 100° 6 mm: Horizontal:52°; vertical: 28°; diagonal: 61°			
Iris Type	Fixed			
Close Focus Distance	1.6 m (5.3 ft)			
DORI Distance	Detect	Observe	Recognize	Identify
	80.0 m	32.0 m	16.0 m	8.0 m
Professional, Intelligent				
Perimeter Protection	Tripwire; intrusion (Recognition of human and vehicle)			
Intelligent Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos			
Video				
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG(only supported by sub stream)			
Smart Codec	Smart H.265+/ Smart H.264+			
Video Frame Rate	Main stream (2688 × 1520@1–25/30 fps)sub stream (704 × 576@1–25 fps/704 × 480@1–30 fps) third stream (1280 × 720@1–25/30 fps)			
Stream Capability	3 streams			
Resolution	4M (2688 × 1520); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)			
Bit Rate Control	CBR/VBR			
Video Bit Rate	H.264: 3 Kbps–8192 Kbps H.265: 3 Kbps–8192 Kbps			
Day/Night	Auto(ICR)/Color/B/W			
BLC	Yes			
HLC	Yes			
WDR	120 dB			
White Balance	Auto/natural/street lamp/outdoor/manual/regional custom			
Gain Control	Auto/Manual			
Noise Reduction	3D DNR			
Motion Detection	OFF/ON (4 areas, rectangular)			
Region of Interest(Roi)	Yes (4 areas)			
Smart Illumination	Yes			
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1920 × 1080 resolution and lower.)			
Mirror	Yes			
Privacy Masking	4 areas			
Audio				
Built-in MIC	Yes			
Audio Compression	G.711a; G.711Mu; G726; AAC			
Alarm				
Alarm Event	No SD card; SD card full; SD card error; less service time of SD card (smart card supports); network disconnection; IP conflict; illegal access; voltage detection; security exception; motion detection; video tampering; scene changing; intensity change; tripwire; intrusion; SMD			
Network				
Network	RJ-45 (10/100 Base-T)			
SDK and API	Yes			
Protocol	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP; RTMP;SMTP;FTP;SFTP;DHCP;DNS;DDNS;QoS;UPnP;NTP; Multicast;ICMP;IGMP;NFS;PP-PoE;802.1x;SNMP			
Interoperability	ONVIF(Profile S/Profile G);CGI;P2P;Milestone;Genetec			
Scene Self-adaptation	Yes			
User/Host	20 (Total bandwidth: 64M)			
Storage	FTP; SFTP; Micro SD Card (support max. 256 G); Dahua Cloud; NAS			
Browser	IE: IE8, IE9, IE11 Chrome Firefox			
Management Software	Smart PSS, DSS, DMSS			
Mobile Phone	IOS; Android			

Certification	
Certifications	CE-LVD: EN62368-1
	CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
	FCC: 47 CFR FCC Part 15, Subpart B
	UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07
Power	
Power Supply	12V DC/PoE (802.3af)
Power Consumption	<7.7W
Environment	
Operating Conditions	-40°C to +60°C (-40°F to +140°F)/ less than 95%
Storage Conditions	-40°C to +60°C (-40°F to +140°F)
Protection Grade	IP67
Structure	
Casing	Inner core: Metal Cover: Metal Decoration ring: Plastic
Dimensions	99.1 mm × Ø121.9 mm (3.9" × Ø4.8")
Net Weight	480 g (1.05 lb)
Gross Weight	660 g (1.45 lb)

Dimensioni

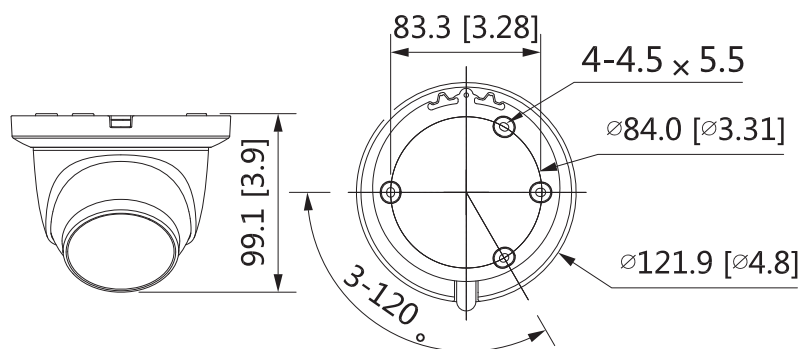

Hiltron Land S.r.l.

Strada Provinciale di Caserta, 218 80144 - Napoli - Italy
Tel: (+39) 081.185.39.000 Fax: (+39) 081.185.39.016
www.hiltronsecurity.it

